

No.4

## CPU scheduling

Prof. Hui Jiang  
Dept of Computer Science and Engineering  
York University

## CPU Scheduling


- CPU scheduling is the basis of multiprogramming
- CPU scheduling consists of two components:
  - **CPU scheduler**: when CPU becomes idle, the CPU scheduler must select from among the processes in ready queue.
  - **Dispatcher**: the module which gives control of CPU to the process selected by the CPU scheduler.
    - Switching context
    - Switching to user mode
    - Jumping to the proper location in user program to restart
  - Dispatch latency: the time it takes for the dispatcher to stop one process and start another running
    - Dispatcher should be as fast as possible

## Preemptive vs. Non-preemptive scheduling


- CPU scheduling decisions may take place when a process:
  1. Switches from running to waiting state.
  2. Switches from running to ready state.
  3. Switches from waiting to ready.
  4. Terminates.
- Non-preemptive scheduling takes place under 1 and 4.
  - Once the CPU has been allocated to a process, the process keeps the CPU until it releases CPU.
- Preemptive scheduling takes place in 1,2,3,4.
  - A running process can be preempted by another process
  - How about if the preempted process is updating some critical data structure?
    - Process synchronization
    - Disable interrupt
  - Not easy to make OS kernel to support preemptive scheduling

## CPU burst vs. I/O burst

- Process execution  
= CPU burst + I/O burst
- Process alternates between these two states.

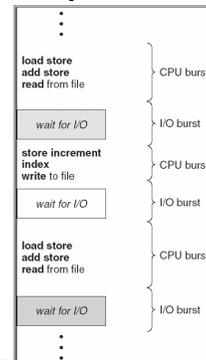

## Histogram of CPU-burst Times

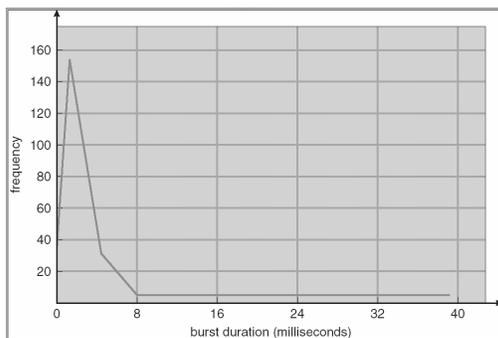

## Scheduling Criteria

- CPU utilization – keep the CPU as busy as possible.
  - Usage percentage (40%– 90%)
- Throughput – # of processes that complete their execution per time unit.
- Turnaround time – amount of time to execute a particular process.
  - The interval from the time of submission a process to the time of completion.
- Waiting time – amount of time a process has been waiting in the ready queue.
- Response time – amount of time it takes from when a request was submitted until the first response is produced, *not* the final output (for time-sharing environment).


## Scheduling Algorithms

- First-come, first-served (FCFS) scheduling algorithm
- Shortest-Job-First (SJF) Scheduling
- Priority Scheduling
- Round-Robin (RR) scheduling
- Multi-level Queue Scheduling
- Multilevel Feedback Queue Scheduling

## First-Come, First-Served (FCFS) Scheduling

Process	Burst Time
$P_1$	24
$P_2$	3
$P_3$	3

- Suppose that the processes arrive at time 0 in the order:  $P_1, P_2, P_3$ . The Gantt Chart for the scheduling is:




- Waiting time for  $P_1 = 0$ ;  $P_2 = 24$ ;  $P_3 = 27$ .
- Average waiting time:  $(0 + 24 + 27)/3 = 17$ .

## FCFS Scheduling (Cont.)

Suppose that the processes arrive in the order:

$P_2, P_3, P_1$ .

- The Gantt chart for the schedule is:



- Waiting time for  $P_1 = 6$ ;  $P_2 = 0$ ;  $P_3 = 3$ .
- Average waiting time:  $(6 + 0 + 3)/3 = 3$ .
- FCFS is easy to implement (as a FIFO sequence).
- FCFS results in long wait in most cases and suffers convoy effect.
  - Convoy effect: all the other processes wait for one big process to get off the CPU.


## Shortest-Job-First (SJF) Scheduling

- Associate with each process the length of its next CPU burst. Schedule CPU to process with the shortest time.
  - The shortest one is the first.
- Implementation: ready queue  $\rightarrow$  sorted list.
- Two schemes:
  - nonpreemptive – once CPU given to the process it cannot be preempted until it completes its CPU burst.
  - preemptive – if a new process arrives with CPU burst length less than remaining time of current executing process, it preempts. This scheme is known as the Shortest-Remaining-Time-First (SRTF).
- SJF is optimal – gives minimum average waiting time for a given set of processes.

## Example of Non-Preemptive SJF

Process	Arrival Time	Burst Time
$P_1$	0.0	7
$P_2$	2.0	4
$P_3$	4.0	1
$P_4$	5.0	4

- SJF (non-preemptive)




- Average waiting time =  $(0 + 6 + 3 + 7)/4 = 4$

## Example of Preemptive SJF (shortest-remaining-time-first)

Process	Arrival Time	Burst Time
$P_1$	0.0	7
$P_2$	2.0	4
$P_3$	4.0	1
$P_4$	5.0	4

- SJF (preemptive)



- Average waiting time =  $(9 + 1 + 0 + 2)/4 = 3$

## Determining Length of Next CPU Burst

- Length of next CPU burst is unknown.
- Can only estimate the length.
- Can be done by using the length of previous CPU bursts, using exponential averaging, to predict the next one.
  - $t_n$  = actual length of  $n^{\text{th}}$  CPU burst
  - $\tau_{n+1}$  = predicted value for the next CPU burst
  - $\alpha, 0 \leq \alpha \leq 1$
  - Define:  $\tau_{n+1} = \alpha t_n + (1-\alpha)\tau_n$ .

## Examples of Exponential Averaging

- $\alpha = 0$ 
  - $\tau_{n+1} = \tau_n$
  - Recent history does not count.
- $\alpha = 1$ 
  - $\tau_{n+1} = t_n$
  - Only the actual last CPU burst counts.
- If we expand the formula, we get:
 
$$\tau_{n+1} = \alpha t_n + (1-\alpha)\alpha t_{n-1} + \dots$$

$$+ (1-\alpha)^j \alpha t_{n-j} + \dots$$

$$+ (1-\alpha)^{n-1} t_0$$
- Since both  $\alpha$  and  $(1-\alpha)$  are less than or equal to 1, each successive term has less weight than its predecessor.


## Examples of Exponential Averaging

- $\alpha = 0$ 
  - $\tau_{n+1} = \tau_n$
  - Recent history does not count.
- $\alpha = 1$ 
  - $\tau_{n+1} = t_n$
  - Only the actual last CPU burst counts.
- If we expand the formula, we get:
 
$$\tau_{n+1} = \alpha t_n + (1-\alpha)\alpha t_{n-1} + \dots$$

$$+ (1-\alpha)^j \alpha t_{n-j} + \dots$$

$$+ (1-\alpha)^{n-1} t_0$$
- Since both  $\alpha$  and  $(1-\alpha)$  are less than or equal to 1, each successive term has less weight than its predecessor.

## Prediction of the Length of the Next CPU Burst

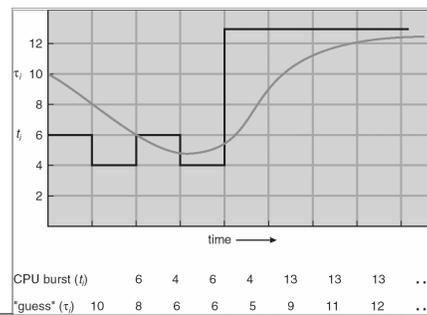


## Priority Scheduling

- A priority number (integer) is associated with each process
- The CPU is allocated to the process with the highest priority (smallest integer = highest priority).
  - Preemptive
  - nonpreemptive
- SJF is a priority scheduling where priority is the predicted next CPU burst time.
- Problem = Starvation – low priority processes may never execute.
- Solution = Aging – as time progresses increase the priority of the process.

## Round Robin (RR)

- Each process gets a small unit of CPU time (*time quantum*), usually 10-100 milliseconds. After this time has elapsed, the process is preempted and added to the end of the ready queue.
  - Ready queue is a circular queue or FIFO queue.
- If there are  $n$  processes in the ready queue and the time quantum is  $q$ , then each process gets  $1/n$  of the CPU time in chunks of at most  $q$  time units at once. No process waits more than  $(n-1)q$  time units.
- Performance:
  - $q$  large  $\Rightarrow$  FCFS
  - $q$  small  $\Rightarrow$  too many context switches, so overhead is high.
  - $q$  must be large with respect to most CPU bursts' lengths.


## Time Quantum and Context Switch Time

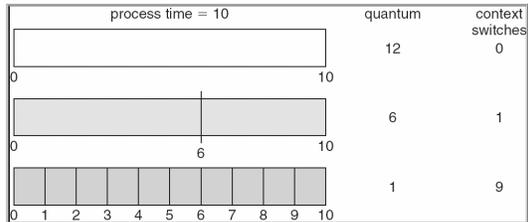

## Example of RR with Time Quantum = 20


Process	Burst Time
$P_1$	53
$P_2$	17
$P_3$	68
$P_4$	24

- The Gantt chart is:



- Typically, higher average turnaround than SJF, but better response.


## Turnaround Time Varies With The Time Quantum

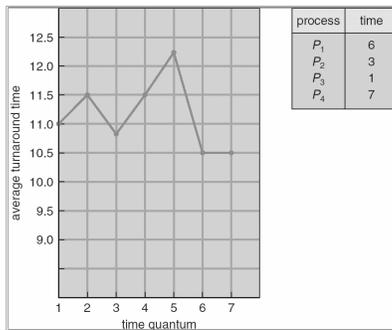

## Multilevel Queue


- Ready queue is partitioned into separate queues:
  - foreground (interactive)
  - background (batch)
- Any process is permanently assigned to one of these queues
- Each queue has its own scheduling algorithm, i.e.,
  - foreground – RR
  - background – FCFS
- Scheduling must be done between the queues.
  - Fixed priority scheduling; (i.e., serve all from foreground then from background). Possibility of starvation.
  - Time slice – each queue gets a certain amount of CPU time which it can schedule amongst its processes; i.e.,
    - 80% to foreground in RR
    - 20% to background in FCFS

## One example of multilevel Queue Scheduling

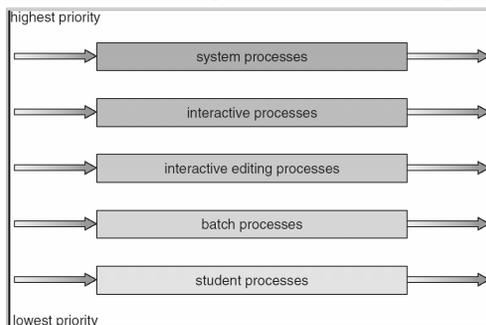

## Multilevel Feedback Queue

- A process can move between the various queues; aging can be implemented this way.
  - If used too much CPU time → lower-priority queue
  - If waited too long → higher-priority queue
- Multilevel-feedback-queue scheduler defined by the following parameters:
  - number of queues
  - scheduling algorithms for each queue
  - method used to determine when to upgrade a process
  - method used to determine when to demote a process
  - method used to determine which queue a process will enter when that process needs service
- It is the most general CPU scheduling algorithm. Can be configured to match a specific system under design.

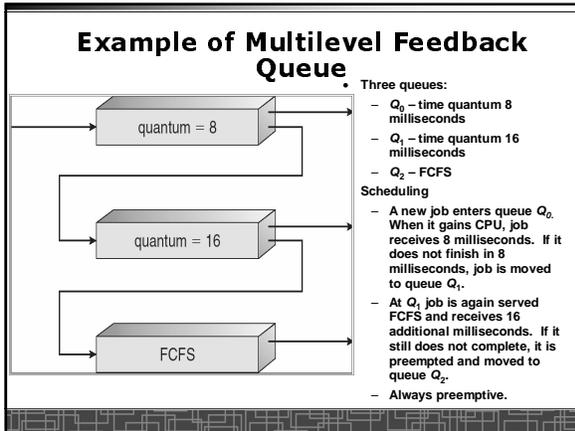

- ### Multiple-Processor Scheduling
- CPU scheduling more complex when multiple CPUs are available.
  - *Homogeneous processors* within a multiprocessor.
    - Any available processor can then be used to run any process in the queue.
  - One common queue vs. a separate queue for each CPU
  - *Symmetric multiprocessing* – each processor is self-scheduling
    - Each processor select its processes from the queue
    - Process synchronization when accessing common queues
  - *Asymmetric multiprocessing* – one processor (master) schedules for all processors
    - only one processor accesses the system data structures
    - alleviating the need for data sharing.

- ### Real-Time Scheduling
- *Hard real-time* systems – requires to complete a critical task within a guaranteed amount of time.
    - Hard to achieve in a general-purpose computer.
  - *Soft real-time* computing – requires that the real-time processes receive priority over others (no aging).
  - The dispatch latency must be small → preempt system call (kernel)
    - Adding preemption points (safe points) in system calls
    - Making the entire kernel preemptible by using process synchronization technique to protect all critical region

- ### Scheduling Algorithm Evaluation
- Analytic evaluation: deterministic modeling
    - Given a pre-determined workload, calculate the performance of each algorithm for that workload.
  - Queuing Models
    - No static workload available, so use the probabilistic distribution of CPU and I/O bursts.
    - Use queuing-network analysis.
    - The classes of algorithms and distributions that can be handled in this way are fairly limited.
  - Simulation: use a simulator to model a computer system
    - simulator is driven by random-number generator according to certain distributions.
    - Simulator is driven by a trace file, which records actual events happened in a real system.