
# Introduction to WMNs and MANETs

COSC 6590 Fall 2009 Dept. of CSE – York University

1

#### **Course Information**


• Refer to the course web page.

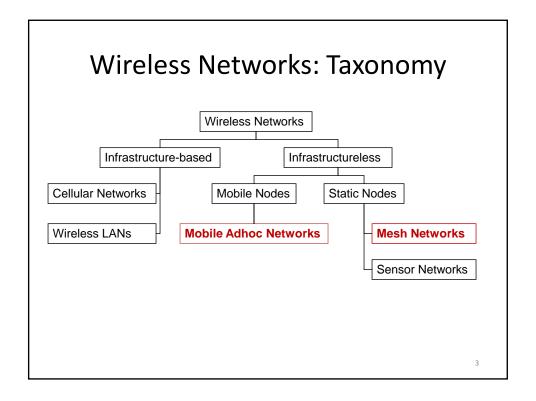


#### Wireless Mesh Networks

- WMNs consist of two types of nodes:
  - mesh routers: forwarding data.
  - mesh clients: acting as hosts; forwarding data.
- The architecture of WMNs can be classified into three main groups:
  - Infrastructure/Backbone
  - Client WMNs
  - Hybrid WMNs

# Infrastructure/Backbone

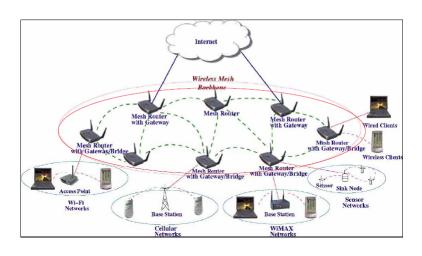


# **Client WMNs**

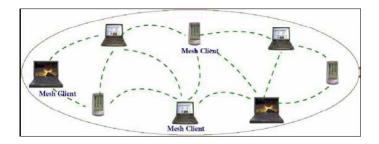

- One type of radio on devicesSupporting end-user applications

#### **Hybrid WMNs**

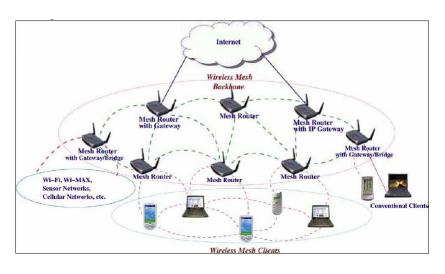

7

#### Characteristics

- Multi-hop wireless networking
  - Extend the coverage range
  - Provide non-line-of-sight connections
- Ad hoc networking
- Self-forming, self-healing, self-organization
- Low upfront investment costs
- Quick deployment

#### Characteristics (2)

- Enabling integration of various existing networks (WiFi, WiMax, Internet, cellular, sensor networks) through gateway/bridge functionalities in mesh routers.
- Mobility: depending on the type of mesh node
- Power and resource constraints:
  - mesh router: usually non restrictive
  - mobile devices: limited power supply, storage, computing resources.


9

#### **Applications**

- Broadband Home Networking
- Community Networking
- Enterprise Networking
- Metropolitan Area Networks
- Transportation Systems
- Building Automation
- Health and Medical Systems
- Security Surveillance Systems


LO

# **Broadband Home Networking**

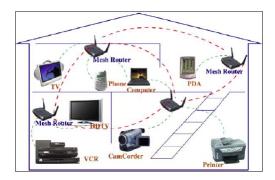


11

# **Community Networking**

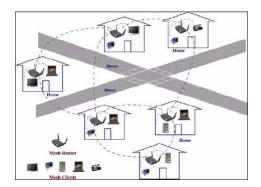


# **Enterprise Networking**

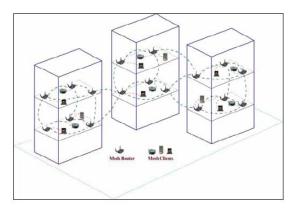


13

# Metropolitan Area Networks

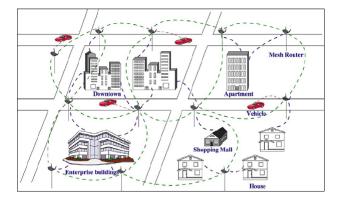


# **Transportation Systems**

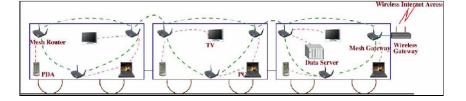

1.5

# **Many Other Applications**

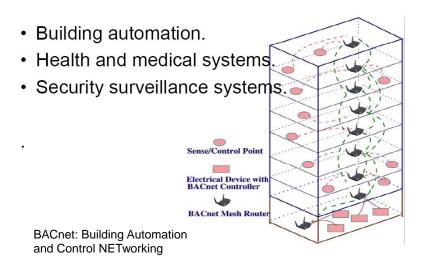

#### WMNs: Challenges

- Wireless channels: error-prone media
- Low bandwidth channels
- Scalability
- Quality of service (QoS) guarantee
- Security
- Comparability, interoperability
- Mobility

17

#### Scalability

- When the size of network increases, the network performance degrades significantly.
- Current IEEE 802.11 MAC protocol and its derivatives cannot achieve a reasonable throughput as the number of hops increases to 4 or higher (for 802.11b, the TCP throughput is lower than 1 Mbps).

#### Single Channel: Capacity

• Theoretical upper limit of the per node throughput capacity:

$$O(1/\sqrt{n})$$

• Experimental results from CSMA/CA MAC on a string topology: throughput  $\approx 1 / n$ 

19

#### Scalability (2)

- Routing protocols may not be able to find a reliable routing path.
- Transport protocols may loose connections.
- MAC protocols may experience significant throughput reduction.

#### Scalability (3)

- CSMA/CA has very low frequency spatialreuse efficiency.
- Centralized medium access schemes such as TDMA, CDMA are difficult to implement
  - Ad hoc nature of WMNs
  - Complexities of TDMA, CDMA
  - Time synchronization of TDMA

21

#### Security

- Routers, devices: physically vulnerable
- Jamming attacks
- No centralized trusted authority to distribute public keys in a WMN due to distributed system architecture.

#### Critical Design Factors

- Scalability
- Security
- Compatibility and interoperability
  - WiFi, WiMax, ZigBee, cellular, Internet
- Broadband and QoS
  - end-to-end delay, delay jitter, PDR, throughput, fairness
- Mesh connectivity
  - Self-organization, topology control
  - Topology-aware MAC and routing

23

#### Critical Design Factors (2)

- Ease of use
  - As automatic as possible (power management, selforganization, topology control, fault tolerance, fast subscription/authentication)
  - For quick and inexpensive deployment
- Radio techniques
  - Directional and smart antennas
  - MIMO systems
  - Multi-radio/multi-channel systems
  - Software radio


#### Mobile Ad hoc Networks

- MANETs
- No infrastructure (no base stations or access points)
- Mobile nodes
  - Form a network in an ad-hoc manner
  - Act both as hosts and routers
  - Communicate using single or multi-hop wireless links
- Topology, locations, connectivity, transmission quality are variable.

25

# MANETs: Operations Value of the control of the con

#### MANETs vs. WMNs

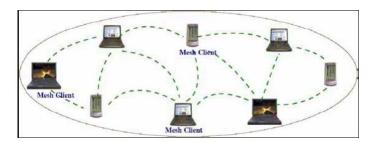

- One type of radio on devices
- Supporting end-user applications

27

#### MANETs vs. WMNs (2)

- MANETs: end-user devices also perform routing and configuration functionalities for all other nodes.
- WMNs: mesh routers perform these tasks.
- Mesh routers vs. mobile devices:
  - power and resource constraints
  - mobility
- MANETs: usually only one radio.
- WMNs: can have multiple channels, multiple radios.

#### **MANETs:** Applications

- Civil
  - Disaster recovery
  - Taxi cabs
  - Communications over water using floats
  - Vehicular ad-hoc network
- Military
  - Battlefield communications
  - Monitoring and planning

20

#### MANETs: Challenges

- Wireless channels: error-prone media
- Low bandwidth channels
- Security
- Unpredictable mobility
- Devices: low power, limited resources
- Maintaining connectivity, states

#### References

- Wireless Mesh Networks (Akyildiz), chapter 1
- Ad Hoc Wireless Networks (Murthy)