


Chapter 1 Introduction



A note on the use of these ppt slides:

We're making these slides freely available to all (faculty, students, readers). They're in PowerPoint form so you can add, modify, and delete slides (including this one) and slide content to suit your needs. They obviously represent a lot of work on our part. In return for use, we only ask the following:

- If you use these slides (e.g., in a class) in substantially unaltered form, that you mention their source (after all, we'd like people to use our book!)
- If you post any slides in substantially unaltered form on a www site, that you note that they are adapted from (or perhaps identical to) our slides, and note our copyright of this material.

Thanks and enjoy! JFK/KWR

All material copyright 1996-2010
J.F. Kurose and K.W. Ross, All Rights Reserved

*Computer Networking:
A Top Down Approach,
5th edition,
Jim Kurose, Keith Ross
Addison-Wesley, April
2009.*

Introduction 1-1

Chapter 1: roadmap


- 1.1 What *is* the Internet?
- 1.2 Network edge
 - end systems, access networks, links
- 1.3 Network core
 - circuit switching, packet switching, network structure
- 1.4 Delay, loss and throughput in packet-switched networks
- 1.5 Protocol layers, service models
- 1.6 Networks under attack: security
- 1.7 History

Introduction 1-4

CSE3214

- Text: Computer Networking: A top-down approach 5th Edition Kurose and Ross
- Grading Scheme
 - 3 quizzes 10%
 - Projects 20%
 - Midterm 25%
 - Final 45%

What's the Internet: "nuts and bolts" view

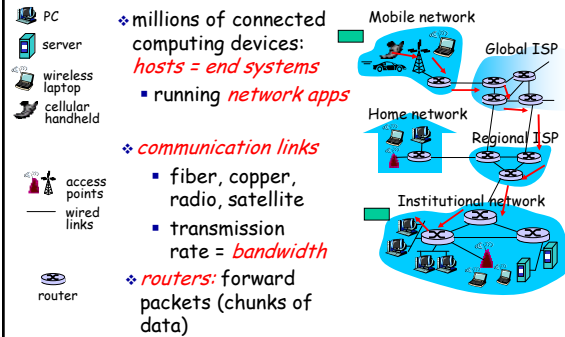

Introduction 1-5

Chapter 1: Introduction

Our goal:

- get "feel" and terminology
- more depth, detail *later* in course
- approach:
 - use Internet as example

Overview:

- what's the Internet?
- what's a protocol?
- network edge: hosts, access net, physical media
- network core: packet/circuit switching, Internet structure
- performance: loss, delay, throughput
- security
- protocol layers, service models
- history

Introduction 1-3


"Fun" internet appliances



Introduction 1-6

What's the Internet: "nuts and bolts" view


- ❖ **protocols** control sending, receiving of msgs
 - e.g., TCP, IP, HTTP, Skype, Ethernet
- ❖ **Internet: "network of networks"**
 - loosely hierarchical
 - public Internet versus private intranet
- ❖ Internet standards
 - RFC: Request for comments
 - IETF: Internet Engineering Task Force



Introduction 1-7

What's a protocol?

a human protocol and a computer network protocol:

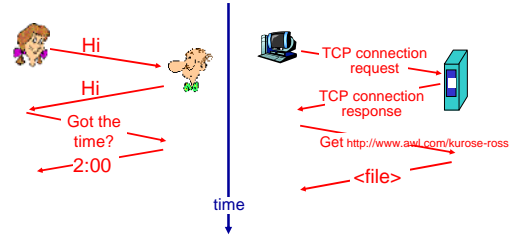


Q: Other human protocols?

Introduction 1-10

What's the Internet: a service view

- ❖ Infrastructure that provides services to applications (postal Service Analogy).
- ❖ **communication infrastructure**
 - Web, VoIP, email, games, e-commerce, file sharing
 - Enables distributed applications
- ❖ Internet provides API to users
 - Compare that to postal service
- ❖ communication services provided to apps:
 - reliable data delivery from source to destination
 - "best effort" (unreliable) data delivery



Introduction 1-8

Chapter 1: roadmap

- 1.1 What *is* the Internet?
- 1.2 Network edge
 - ❖ end systems, access networks, links
- 1.3 Network core
 - ❖ circuit switching, packet switching, network structure
- 1.4 Delay, loss and throughput in packet-switched networks
- 1.5 Protocol layers, service models
- 1.6 Networks under attack: security
- 1.7 History

Introduction 1-11

What's a protocol?

human protocols:

- ❖ "what's the time?"
- ❖ "I have a question"
- ❖ introductions

... specific msgs sent
... specific actions taken when msgs received, or other events

network protocols:


- ❖ machines rather than humans
- ❖ all communication activity in Internet governed by protocols

protocols define format, order of msgs sent and received among network entities, and actions taken on msg transmission, receipt

Introduction 1-9

A closer look at network structure:

- ❖ **network edge:** applications and hosts
- ❖ **access networks, physical media:** wired, wireless communication links
- ❖ **network core:**
 - interconnected routers
 - network of networks



Introduction 1-12

The network edge:

❖ end systems (hosts):


- run application programs
- e.g. Web, email
- at "edge of network"

❖ client/server model

- client host requests, receives service from always-on server
- e.g. Web browser/server; email client/server


❖ peer-peer model:

- minimal (or no) use of dedicated servers
- e.g. Skype, BitTorrent



Introduction 1-13

Digital Subscriber Line (DSL)

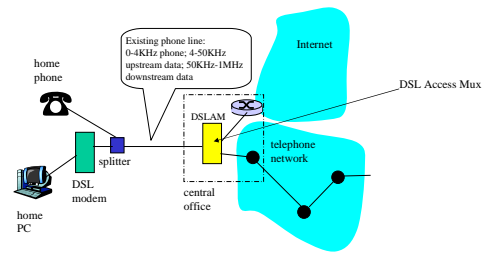

- ❖ uses existing telephone infrastructure
- ❖ up to 1 Mbps upstream (today typically < 256 kbps)
- ❖ up to 8 Mbps downstream (today typically < 1 Mbps)
- ❖ dedicated physical line to telephone central office

Introduction 1-16


Access networks and physical media

Q: How to connect end systems to edge router?

- ❖ residential access nets
- ❖ institutional access networks (school, company)
- ❖ mobile access networks

Keep in mind:

- ❖ bandwidth (bits per second) of access network?
- ❖ shared or dedicated?




Introduction 1-14

Residential access: cable modems

- ❖ uses cable TV infrastructure, rather than telephone infrastructure
- ❖ **HFC: hybrid fiber coax**
 - asymmetric: up to 30Mbps downstream, 2 Mbps upstream
- ❖ **network** of cable, fiber attaches homes to ISP router
 - homes **share access** to router
 - unlike DSL, which has **dedicated access**

Introduction 1-17

Dial-up Modem



- ❖ uses existing telephony infrastructure
 - home directly-connected to **central office**
- ❖ up to 56Kbps direct access to router (often less)
- ❖ can't surf, phone at same time: not "**always on**"

Introduction 1-15

Residential access: cable modems


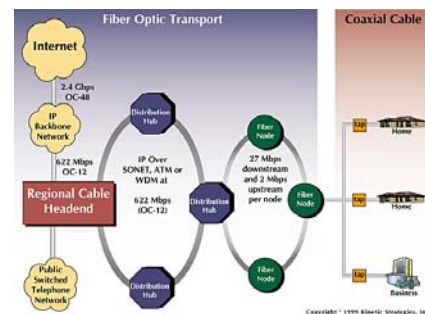


Diagram: <http://www.cabledataneews.com/cm/cdiagram.html>


Introduction 1-18

Cable Network Architecture: Overview

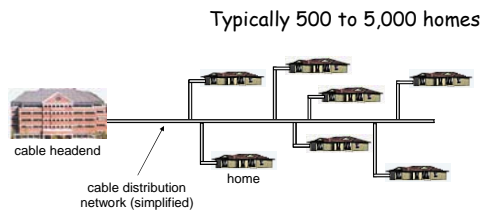


Introduction 1-19

Cable Network Architecture: Overview

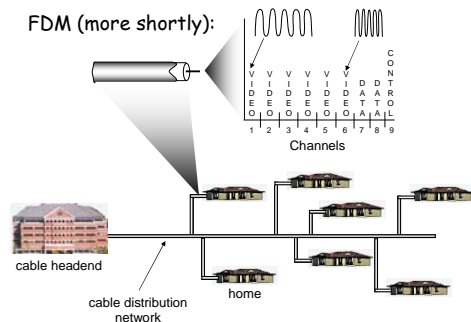


Introduction 1-22

Cable Network Architecture: Overview

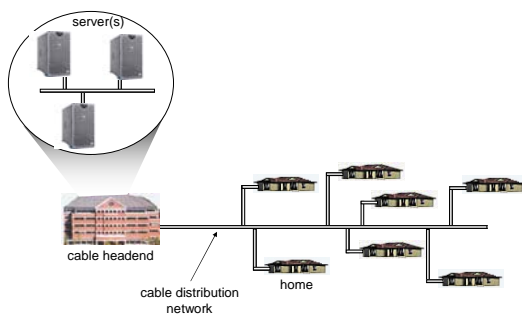

Introduction 1-20


Fiber to the Home

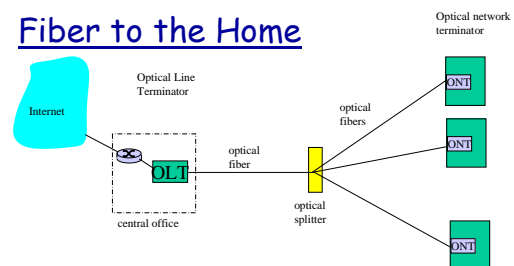

- ❖ optical links from central office to the home
- ❖ two competing optical technologies:
 - Passive Optical network (PON)
 - Active Optical Network (PAN)
- ❖ much higher Internet rates; fiber also carries television and phone services


Introduction 1-23

Cable Network Architecture: Overview

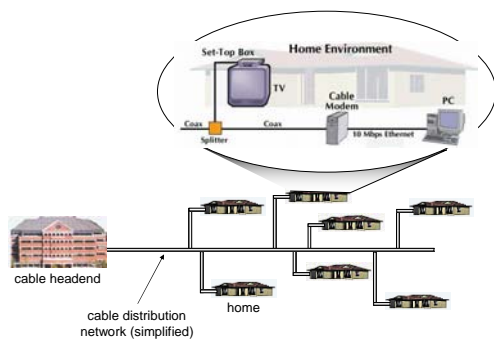

Introduction 1-21

Ethernet Internet access

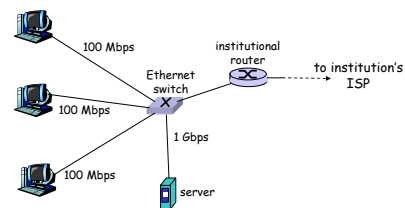


- ❖ typically used in companies, universities, etc
- ❖ 10 Mbps, 100Mbps, 1Gbps, 10Gbps Ethernet
- ❖ today, end systems typically connect into Ethernet switch

Introduction 1-24

Wireless access networks

- ❖ shared *wireless* access network connects end system to router
 - via base station aka "access point"
- ❖ **wireless LANs:**
 - 802.11b/g (WiFi): 11 or 54 Mbps
- ❖ **wider-area wireless access**
 - provided by telco operator
 - ~1Mbps over cellular system (EVDO, HSDPA)
 - next up (?): WiMAX (10's Mbps) over wide area



Introduction 1-25

Physical Media: coax, fiber

Coaxial cable:

- ❖ two concentric copper conductors
- ❖ bidirectional
- ❖ baseband:
 - single channel on cable
 - legacy Ethernet
- ❖ broadband:
 - multiple channels on cable
 - HFC



Fiber optic cable:

- ❖ glass fiber carrying light pulses, each pulse a bit
- ❖ high-speed operation:
 - high-speed point-to-point transmission (e.g., 10's-100's Gbps)
- ❖ low error rate: repeaters spaced far apart; immune to electromagnetic noise




Introduction 1-28

Home networks

Typical home network components:

- ❖ DSL or cable modem
- ❖ router/firewall/NAT
- ❖ Ethernet
- ❖ wireless access point

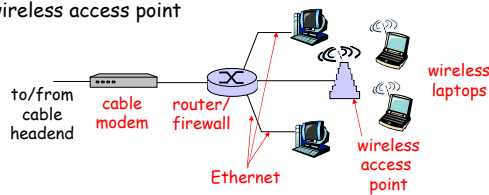

Introduction 1-26

Physical media: radio

- ❖ signal carried in electromagnetic spectrum
- ❖ no physical "wire"
- ❖ bidirectional
- ❖ propagation environment effects:
 - reflection
 - obstruction by objects
 - interference

Radio link types:

- ❖ **terrestrial microwave**
 - e.g. up to 45 Mbps channels
- ❖ **LAN** (e.g., WiFi)
 - 11Mbps, 54 Mbps
- ❖ **wide-area** (e.g., cellular)
 - 3G cellular: ~1 Mbps
- ❖ **satellite**
 - Kbps to 45Mbps channel (or multiple smaller channels)
 - 270 msec end-end delay
 - geosynchronous versus low altitude

Introduction 1-29

Physical Media

- ❖ **bit:** propagates between transmitter/rcvr pairs
- ❖ **physical link:** what lies between transmitter & receiver
- ❖ **guided media:**
 - signals propagate in solid media: copper, fiber, coax
- ❖ **unguided media:**
 - signals propagate freely, e.g., radio

Twisted Pair (TP)

- ❖ two insulated copper wires
 - Category 3: traditional phone wires, 10 Mbps Ethernet
 - Category 5: 100Mbps Ethernet



Introduction 1-27


Chapter 1: roadmap

- 1.1 What *is* the Internet?
- 1.2 Network edge
 - ❖ end systems, access networks, links
- 1.3 Network core
 - ❖ circuit switching, packet switching, network structure
- 1.4 Delay, loss and throughput in packet-switched networks
- 1.5 Protocol layers, service models
- 1.6 Networks under attack: security
- 1.7 History

Introduction 1-30


The Network Core

- ❖ mesh of interconnected routers
- ❖ the fundamental question: how is data transferred through net?
 - **circuit switching:** dedicated circuit per call: telephone net
 - **packet-switching:** data sent thru net in discrete "chunks"



Introduction 1-31


Circuit Switching: FDM and TDM

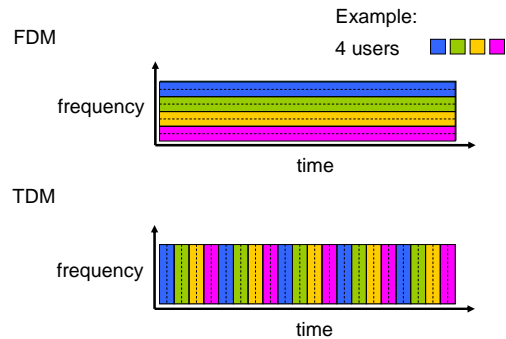

Introduction 1-34

Network Core: Circuit Switching

- end-end resources reserved for "call"**
- ❖ link bandwidth, switch capacity
 - ❖ dedicated resources: no sharing
 - ❖ circuit-like (guaranteed) performance
 - ❖ call setup required



Introduction 1-32

Numerical example

- ❖ How long does it take to send a file of 640,000 bits from host A to host B over a circuit-switched network?
 - all link speeds: 1.536 Mbps
 - each link uses TDM with 24 slots/sec
 - 500 msec to establish end-to-end circuit

Let's work it out!

Introduction 1-35

Network Core: Circuit Switching

- network resources (e.g., bandwidth) **divided into "pieces"**
- ❖ pieces allocated to calls
 - ❖ resource piece *idle* if not used by owning call (*no sharing*)
- ❖ dividing link bandwidth into "pieces"
 - frequency division
 - time division


Introduction 1-33

Network Core: Packet Switching

- each end-end data stream divided into *packets***
- ❖ user A, B packets *share* network resources
 - ❖ each packet uses full link bandwidth
 - ❖ resources used *as needed*
- resource contention:**
- ❖ aggregate resource demand can exceed amount available
 - ❖ congestion: packets queue, wait for link use
 - ❖ store and forward: packets move one hop at a time
 - node receives complete packet before forwarding
- Bandwidth division into "pieces"**
 Dedicated allocation
 Resource reservation

Introduction 1-36

Packet Switching: Statistical Multiplexing

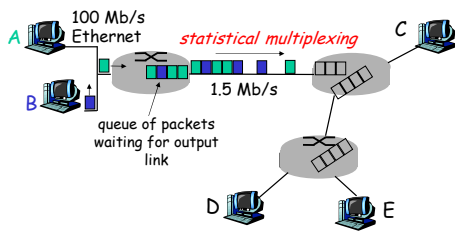

- ❖ sequence of A & B packets has no fixed timing pattern
 - bandwidth shared on demand: *statistical multiplexing*.
- ❖ TDM: each host gets same slot in revolving TDM frame.

Introduction 1-37

Packet switching versus circuit switching


Is packet switching a "slam dunk winner?"

- ❖ great for bursty data
 - resource sharing
 - simpler, no call setup
- ❖ **excessive congestion:** packet delay and loss
 - protocols needed for reliable data transfer, congestion control
- ❖ **Q: How to provide circuit-like behavior?**
 - bandwidth guarantees needed for audio/video apps
 - still an unsolved problem (chapter 7)

Q: human analogies of reserved resources (circuit switching) versus on-demand allocation (packet-switching)?

Introduction 1-40

Packet-switching: store-and-forward



- ❖ takes L/R seconds to transmit (push out) packet of L bits on to link at R bps
- ❖ **store and forward:** entire packet must arrive at router before it can be transmitted on next link
- ❖ delay = $3L/R$ (assuming zero propagation delay) } more on delay shortly ...


Example:

- $L = 7.5$ Mbits
- $R = 1.5$ Mbps
- transmission delay = 15 sec

Introduction 1-38

Internet structure: network of networks

- ❖ roughly hierarchical
- ❖ **at center: small # of well-connected large networks**
 - "tier-1" commercial ISPs (e.g., Verizon, Sprint, AT&T, Qwest, Level3), national & international coverage
 - **large content distributors** (Google, Akamai, Microsoft)
 - treat each other as equals (no charges)

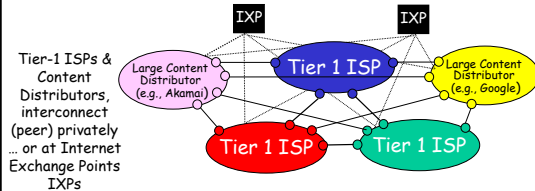


Introduction 1-41

Packet switching versus circuit switching

Packet switching allows more users to use network!

Example:

- 1 Mb/s link
- each user:
 - 100 kb/s when "active"
 - active 10% of time




- ❖ **circuit-switching:**
 - 10 users
- ❖ **packet switching:**
 - with 35 users, probability > 10 active at same time is less than .0004

Q: how did we get value 0.0004?

Q: what happens if > 35 users?

Introduction 1-39

Tier-1 ISP: e.g., Sprint

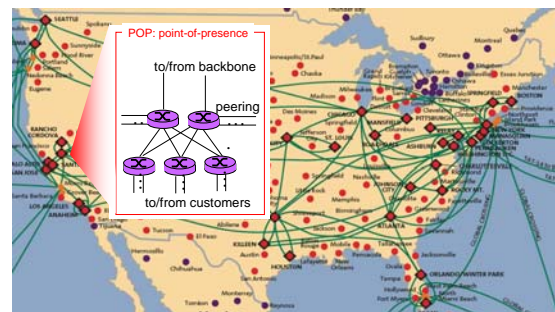


Introduction 1-42

Internet structure: network of networks

"tier-2" ISPs: smaller (often regional) ISPs

- ❖ connect to one or more tier-1 (*provider*) ISPs
 - each tier-1 has many tier-2 *customer nets*
 - tier 2 pays tier 1 provider
- ❖ tier-2 nets sometimes peer directly with each other (bypassing tier 1), or at IXP

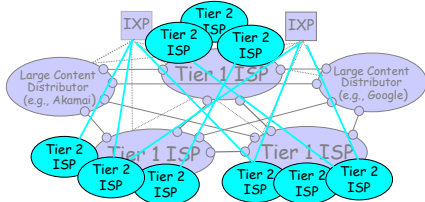

Introduction 1-43


Chapter 1: roadmap

- 1.1 What *is* the Internet?
- 1.2 Network edge
 - ❖ end systems, access networks, links
- 1.3 Network core
 - ❖ circuit switching, packet switching, network structure
- 1.4 Delay, loss and throughput in packet-switched networks
- 1.5 Protocol layers, service models
- 1.6 Networks under attack: security
- 1.7 History

Introduction 1-46

Internet structure: network of networks

- ❖ "Tier-3" ISPs, local ISPs
- ❖ customer of tier 1 or tier 2 network
 - last hop ("access") network (closest to end systems)

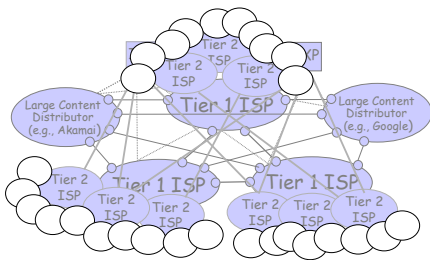


Introduction 1-44

How do loss and delay occur?

packets *queue* in router buffers


- ❖ packet arrival rate to link exceeds output link capacity
- ❖ packets queue, wait for turn

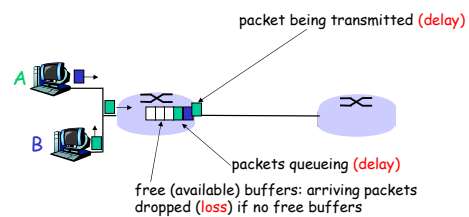

Introduction 1-47


Internet structure: network of networks

- ❖ a packet passes through *many* networks from source host to destination host

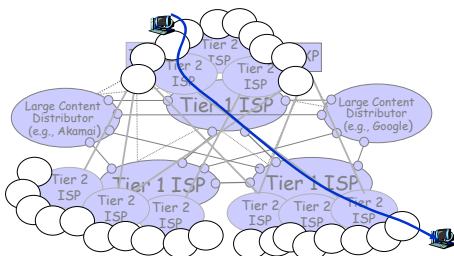

Introduction 1-45

Four sources of packet delay



$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$

d_{proc} : nodal processing


- check bit errors
- determine output link
- typically < msec

d_{queue} : queueing delay

- time waiting at output link for transmission
- depends on congestion level of router

Introduction 1-48

Four sources of packet delay

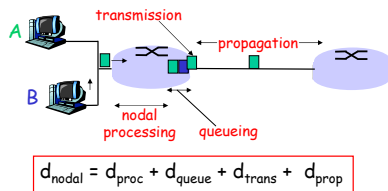


- d_{trans} : transmission delay:**
- L: packet length (bits)
 - R: link bandwidth (bps)
 - $d_{\text{trans}} = L/R$
- d_{prop} : propagation delay:**
- d: length of physical link
 - s: propagation speed in medium ($\sim 2 \times 10^8$ m/sec)
 - $d_{\text{prop}} = d/s$
- d_{trans} and d_{prop} very different*

Introduction 1-49


Queueing delay (revisited)

- ❖ Very high-level picture
 - ❖ Most important part of the delay - **WHY?**
 - ❖ R: link bandwidth (bps)
 - ❖ L: packet length (bits)
 - ❖ a: average packet arrival rate
 - ❖ $La/R \sim 0$: avg. queueing delay small
 - ❖ $La/R \rightarrow 1$: avg. queueing delay large
 - ❖ $La/R > 1$: more "work" arriving than can be serviced, average delay infinite!
- Other measures besides μ , σ , $\text{pr}(\text{delay} > \delta)$



Introduction 1-52

Caravan analogy




- ❖ cars "propagate" at 100 km/hr
- ❖ toll booth takes 12 sec to service car (transmission time)
- ❖ car ~ bit; caravan ~ packet
- ❖ Q: How long until caravan is lined up before 2nd toll booth?
- time to "push" entire caravan through toll booth onto highway = $12 \times 10 = 120$ sec
- time for last car to propagate from 1st to 2nd toll booth: $100 \text{ km} / (100 \text{ km/hr}) = 1$ hr
- A: 62 minutes

Introduction 1-50


"Real" Internet delays and routes

- ❖ What do "real" Internet delay & loss look like?
- ❖ **Traceroute program**: provides delay measurement from source to router along end-end Internet path towards destination. For all i :
 - sends three packets that will reach router i on path towards destination
 - router i will return packets to sender
 - sender times interval between transmission and reply.



Introduction 1-53

Caravan analogy (more)



- ❖ cars now "propagate" at 1000 km/hr
- ❖ toll booth now takes 1 min to service a car
- ❖ Q: Will cars arrive to 2nd booth before all cars serviced at 1st booth?
- A: Yes! After 7 min, 1st car arrives at second booth; three cars still at 1st booth.
- 1st bit of packet can arrive at 2nd router before packet is fully transmitted at 1st router! (see Ethernet applet at AWL Web site)

Introduction 1-51

"Real" Internet delays and routes

traceroute: gaia.cs.umass.edu to www.eurecom.fr

Three delay measurements from gaia.cs.umass.edu to cs-gw.umass.edu

```

1  cs-gw (128.119.240.254)  1 ms  1 ms  2 ms
2  border1-rt-fa5-1-0.gw.umass.edu (128.119.3.145)  1 ms  1 ms  2 ms
3  cht-vbns.gw.umass.edu (128.119.3.130)  6 ms  5 ms  5 ms
4  jnl1-atl-0-0-19.wor.vbns.net (204.147.132.129)  16 ms  11 ms  13 ms
5  jnl1-so7-0-0-0.wae.vbns.net (204.147.136.136)  21 ms  18 ms  18 ms
6  abilene-vbns.abilene.ucaid.edu (198.32.11.9)  22 ms  18 ms  22 ms
7  nycm-wash.abilene.ucaid.edu (198.32.8.46)  22 ms  22 ms  22 ms
8  62.40.103.253 (62.40.103.253)  104 ms  109 ms  106 ms
9  de2-1.de1.de.geant.net (62.40.96.129)  109 ms  102 ms  104 ms
10 de.fr1.fr.geant.net (62.40.96.50)  113 ms  121 ms  114 ms
11 renater-gw.fr1.fr.geant.net (62.40.103.54)  112 ms  114 ms  112 ms
12 nio-n2.cssi.renater.fr (193.51.206.13)  111 ms  114 ms  116 ms
13 nice.cssi.renater.fr (195.220.98.102)  123 ms  125 ms  124 ms
14 r3l2-nice.cssi.renater.fr (195.220.98.110)  126 ms  126 ms  124 ms
15 eurecom-valbonne.r3l2.ft.net (193.48.50.54)  135 ms  128 ms  133 ms
16 194.214.211.25 (194.214.211.25)  126 ms  128 ms  126 ms
17 ...
18 fantasia.eurecom.fr (193.55.113.142)  132 ms  128 ms  136 ms
    
```

trans-oceanic link (between 8 and 9)

means no response (probe lost, router not replying) (line 17)

Introduction 1-54

"Real" Internet delays and routes

- From my desktop to the same destination

```

trigger 126 % traceroute www.eurocom.fr
traceroute to www.eurocom.fr (88.191.53.83), 30 hops max, 60 byte packets
 1 gateway-90.cs.yorku.ca (130.63.90.1) 0.556 ms 0.548 ms 0.531 ms
 2 core01.gw.yorku.ca (130.63.31.14) 2.507 ms 2.509 ms 2.494 ms
 3 border01.swx.yorku.ca (130.63.27.18) 0.796 ms 1.049 ms 1.035 ms
 4 york-hub-yorku-ll-internet.gtinet.ca (205.211.95.133) 0.762 ms 0.742 ms 0.994 ms
 5 ut-hub-york-hub-ll-internet.gtinet.ca (205.211.94.41) 1.264 ms 1.260 ms 1.499 ms
 6 v504.core1.tor1.he.net (216.66.30.113) 6.112 ms 5.387 ms 5.379 ms
 7 10GigabitEthernet3-1.core1.nyc5.he.net (184.105.213.193) 15.073 ms 15.078 ms 15.073 ms
 8 ***
 9 paix-ny.proxad.net (198.32.118.197) 96.886 ms * *
10 londres-6k-1-po103.intf.routers.proxad.net (212.27.58.205) 96.434 ms * *
11 bzn-crs16-1-be1102.intf.routers.proxad.net (212.27.51.185) 105.684 ms 105.712 ms 105.669 ms
12 dedibox-2-p.intf.routers.proxad.net (212.27.50.162) 133.993 ms 125.211 ms 125.204 ms
13 88.191.2.30 (88.191.2.30) 105.813 ms 105.110 ms 105.110 ms
14 sd-9741.dedibox.fr (88.191.53.83) 104.719 ms 104.639 ms 104.643 ms
trigger 127 %
    
```

Throughput (more)

- $R_s < R_c$ What is average end-end throughput?



- $R_s > R_c$ What is average end-end throughput?




bottleneck link

link on end-end path that constrains end-end throughput

Introduction 1-58

Packet loss


- queue (aka buffer) preceding link in buffer has finite capacity
- packet arriving to full queue dropped (aka lost)
- lost packet may be retransmitted by previous node, by source end system, or not at all



Introduction 1-56

Throughput: Internet scenario

- per-connection end-end throughput: $\min(R_c, R_s, R/10)$
- in practice: R_c or R_s is often bottleneck




10 connections (fairly) share backbone bottleneck link R bits/sec

Introduction 1-59

Throughput

- throughput**: rate (bits/time unit) at which bits transferred between sender/receiver
 - instantaneous**: rate at given point in time
 - average**: rate over longer period of time

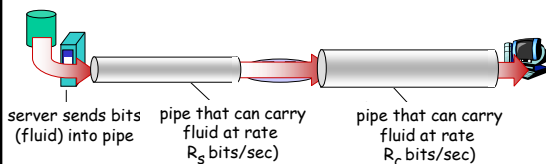

Introduction 1-57

Chapter 1: roadmap

- 1.1 What is the Internet?
- 1.2 Network edge
 - end systems, access networks, links
- 1.3 Network core
 - circuit switching, packet switching, network structure
- 1.4 Delay, loss and throughput in packet-switched networks
- 1.5 Protocol layers, service models
- 1.6 Networks under attack: security
- 1.7 History

Introduction 1-60

Protocol "Layers"

*Networks are complex,
with many "pieces":*

- ❖ hosts
- ❖ routers
- ❖ links of various media
- ❖ applications
- ❖ protocols
- ❖ hardware, software

Question:

Is there any hope of
organizing structure of
network?

Or at least our discussion
of networks?

Introduction 1-61


Why layering?

Dealing with complex systems:

- ❖ explicit structure allows identification, relationship of complex system's pieces
 - layered **reference model** for discussion
- ❖ modularization eases maintenance, updating of system
 - change of implementation of layer's service transparent to rest of system
 - e.g., change in gate procedure doesn't affect rest of system
- ❖ layering considered harmful?

Introduction 1-64

Organization of air travel

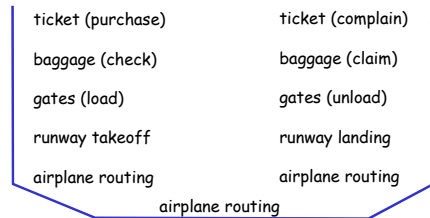


- ❖ a series of steps

Introduction 1-62


Internet protocol stack

- ❖ **application**: supporting network applications
 - FTP, SMTP, HTTP
- ❖ **transport**: process-process data transfer
 - TCP, UDP
- ❖ **network**: routing of datagrams from source to destination
 - IP, routing protocols
- ❖ **link**: data transfer between neighboring network elements
 - Ethernet, 802.111 (WiFi), PPP
- ❖ **physical**: bits "on the wire"



Introduction 1-65

Layering of airline functionality

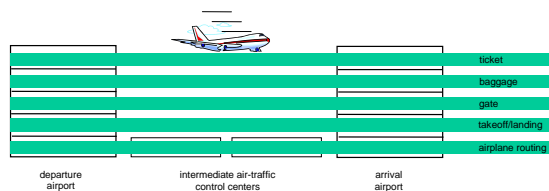


Layers: each layer implements a service

- ❖ via its own internal-layer actions
- ❖ relying on services provided by layer below


Introduction 1-63

ISO/OSI reference model

- ❖ **presentation**: allow applications to interpret meaning of data, e.g., encryption, compression, machine-specific conventions
- ❖ **session**: synchronization, checkpointing, recovery of data exchange
- ❖ Internet stack "missing" these layers!
 - these services, *if needed*, must be implemented in application
 - needed?



Introduction 1-66

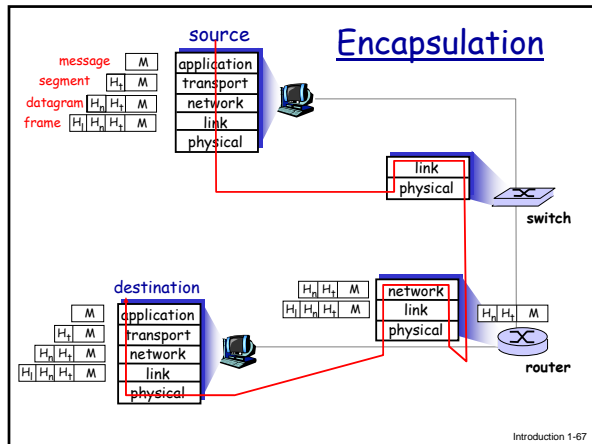

Bad guys: put malware into hosts via Internet

- ❖ malware can get in host from a **virus**, **worm**, or **Trojan horse**.
- ❖ **spyware malware** can record keystrokes, web sites visited, upload info to collection site.
- ❖ infected host can be enrolled in **botnet**, used for spam and DDoS attacks.
- ❖ malware often **self-replicating**: from one infected host, seeks entry into other hosts

Introduction 1-70

Chapter 1: roadmap

- 1.1 What *is* the Internet?
- 1.2 Network edge
 - ❖ end systems, access networks, links
- 1.3 Network core
 - ❖ circuit switching, packet switching, network structure
- 1.4 Delay, loss and throughput in packet-switched networks
- 1.5 Protocol layers, service models
- 1.6 Networks under attack: **security**
- 1.7 History

Introduction 1-68

Bad guys: put malware into hosts via Internet

Trojan horse

- ❖ hidden part of some otherwise useful software
- ❖ today often in Web page (Active-X, plugin)


virus

- ❖ infection by receiving object (e.g., e-mail attachment), actively executing
- ❖ self-replicating: propagate itself to other hosts, users

worm:

- ❖ infection by passively receiving object that gets itself executed
- ❖ self-replicating: propagates to other hosts, users

Sapphire Worm: aggregate scans/sec in first 5 minutes of outbreak (CAIDA, UWisc data)



Introduction 1-71

Network Security


- ❖ **field of network security:**
 - how bad guys can attack computer networks
 - how we can defend networks against attacks
 - how to design architectures that are immune to attacks
- ❖ **Internet not originally designed with (much) security in mind**
 - *original vision*: "a group of mutually trusting users attached to a transparent network" ☺
 - Internet protocol designers playing "catch-up"
 - security considerations in all layers!

Introduction 1-69

Bad guys: attack server, network infrastructure

Denial of Service (DoS): attackers make resources (server, bandwidth) unavailable to legitimate traffic by overwhelming resource with bogus traffic

1. select target
2. break into hosts around the network (see botnet)
3. send packets to target from compromised hosts




Introduction 1-72

The bad guys can sniff packets

Packet sniffing:

- ❖ broadcast media (shared Ethernet, wireless)
- ❖ promiscuous network interface reads/records all packets (e.g., including passwords!) passing by



- ❖ Wireshark software used for end-of-chapter labs is a (free) packet-sniffer

Introduction 1-73


Chapter 1: roadmap

- 1.1 What *is* the Internet?
- 1.2 Network edge
 - ❖ end systems, access networks, links
- 1.3 Network core
 - ❖ circuit switching, packet switching, network structure
- 1.4 Delay, loss and throughput in packet-switched networks
- 1.5 Protocol layers, service models
- 1.6 Networks under attack: security
- 1.7 History

Introduction 1-76

The bad guys can use false source addresses - Man in the middle attack

IP spoofing: send packet with false source address



Introduction 1-74

Internet History

1961-1972: Early packet-switching principles

- ❖ 1961: Kleinrock - queueing theory shows effectiveness of packet-switching
- ❖ 1964: Baran - packet-switching in military nets
- ❖ 1967: ARPAnet conceived by Advanced Research Projects Agency
- ❖ 1969: first ARPAnet node operational
- ❖ 1972:
 - ARPAnet public demonstration
 - NCP (Network Control Protocol) first host-host protocol
 - first e-mail program
 - ARPAnet has 15 nodes




THE ARPANET

Introduction 1-77

The bad guys can record and playback

record-and-playback: sniff sensitive info (e.g., password), and use later


- ❖ password holder *is* that user from system point of view

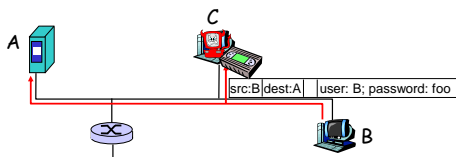

... lots more on security (throughout, Chapter 8)

Introduction 1-75

Internet history



Internet History

1972-1980: Internetworking, new and proprietary nets

- ❖ 1970: ALOHAnet satellite network in Hawaii
- ❖ 1974: Cerf and Kahn - architecture for interconnecting networks
- ❖ 1976: Ethernet at Xerox PARC
- ❖ late 70's: proprietary architectures: DECnet, SNA, XNA
- ❖ late 70's: switching fixed length packets (ATM precursor)
- ❖ 1979: ARPAnet has 200 nodes

Cerf and Kahn's internetworking principles:

- minimalism, autonomy - no internal changes required to interconnect networks
- best effort service model
- stateless routers
- decentralized control

define today's Internet architecture

Introduction 1-79

Internet History

2010:

- ❖ ~750 million hosts
- ❖ voice, video over IP
- ❖ P2P applications: BitTorrent (file sharing) Skype (VoIP), PPLive (video)
- ❖ more applications: YouTube, gaming, Twitter
- ❖ wireless, mobility

Introduction 1-82

Internet History

1980-1990: new protocols, a proliferation of networks

- ❖ 1983: deployment of TCP/IP
- ❖ 1982: smtp e-mail protocol defined
- ❖ 1983: DNS defined for name-to-IP-address translation
- ❖ 1985: ftp protocol defined
- ❖ 1988: TCP congestion control
- ❖ new national networks: Csnnet, BITnet, NSFnet, Minitel
- ❖ 100,000 hosts connected to confederation of networks

Introduction 1-80

Introduction: Summary

Covered a "ton" of material!

- ❖ Internet overview
- ❖ what's a protocol?
- ❖ network edge, core, access network
 - packet-switching versus circuit-switching
 - Internet structure
- ❖ performance: loss, delay, throughput
- ❖ layering, service models
- ❖ security
- ❖ history

You now have:

- ❖ context, overview, "feel" of networking
- ❖ more depth, detail *to follow!*

Introduction 1-83

Internet History

1990, 2000's: commercialization, the Web, new apps

- ❖ early 1990's: ARPAnet decommissioned
- ❖ 1991: NSF lifts restrictions on commercial use of NSFnet (decommissioned, 1995)
- ❖ early 1990's: Web
 - hypertext [Bush 1945, Nelson 1960's]
 - HTML, HTTP: Berners-Lee
 - 1994: Mosaic, later Netscape
 - late 1990's: commercialization of the Web
- ❖ late 1990's - 2000's:
 - ❖ more killer apps: instant messaging, P2P file sharing
 - ❖ network security to forefront
 - ❖ est. 50 million host, 100 million+ users
 - ❖ backbone links running at Gbps

Introduction 1-81