

# Introduction to Computer Networks

EECS 3214

Slides courtesy of J.F. Kurose and K.W. Ross, All Rights Reserved

Introduction 1-1

## Chapter 1: introduction

### *our goal:*

- get “feel” and terminology
- more depth, detail *later* in course
- approach:
  - use Internet as example

### *overview:*

- what’s the Internet?
- what’s a protocol?
- network edge; hosts, access net, physical media
- network core: packet/circuit switching, Internet structure
- performance: loss, delay, throughput
- security
- protocol layers, service models
- history

Introduction 1-2

# Chapter 1: roadmap

## 1.1 what is the Internet?

## 1.2 network edge

- end systems, access networks, links

## 1.3 network core

- packet switching, circuit switching, network structure

## 1.4 delay, loss, throughput in networks

## 1.5 protocol layers, service models

Introduction 1-3

# What's the Internet: "nuts and bolts" view




- billions of connected computing devices:
  - *hosts* = *end systems*
  - running *network apps*



- *communication links*
  - fiber, copper, radio, satellite
  - transmission rate: *bandwidth*



- *packet switches*: forward packets (chunks of data)
  - *routers* and *switches*

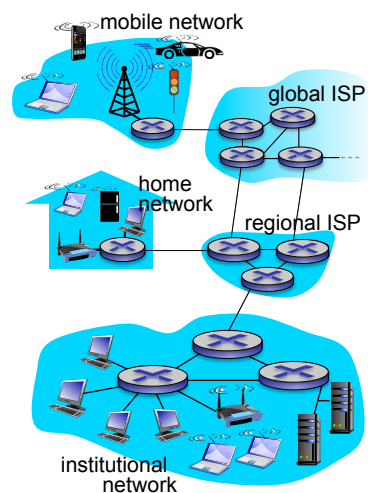

Introduction 1-4

## “Fun” Internet-connected devices



IP picture frame  
<http://www.ceiva.com/>



Web-enabled toaster +  
weather forecaster



Tweet-a-watt:  
monitor energy use



Slingbox: watch,  
control cable TV remotely



sensorized,  
bed  
mattress




Internet phones

Internet  
refrigerator

Introduction 1-5

## What's the Internet: “nuts and bolts” view


- **Internet: “network of networks”**
  - Interconnected ISPs
- **protocols** control sending, receiving of messages
  - e.g., TCP, IP, HTTP, Skype, 802.11
- **Internet standards**
  - RFC: Request for comments
  - IETF: Internet Engineering Task Force

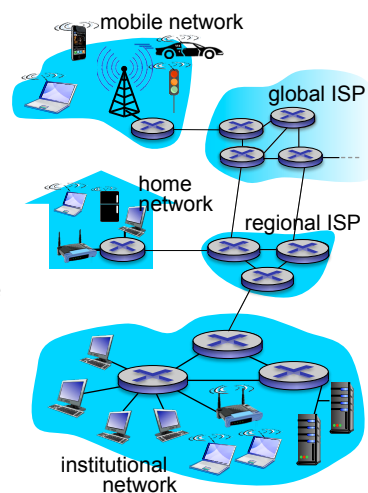

Introduction 1-6

## What's the Internet: a service view

- *infrastructure that provides services to applications:*
  - Web, VoIP, email, games, e-commerce, social nets, ...
- *provides programming interface to apps*
  - hooks that allow sending and receiving app programs to "connect" to Internet
  - provides service options, analogous to postal service

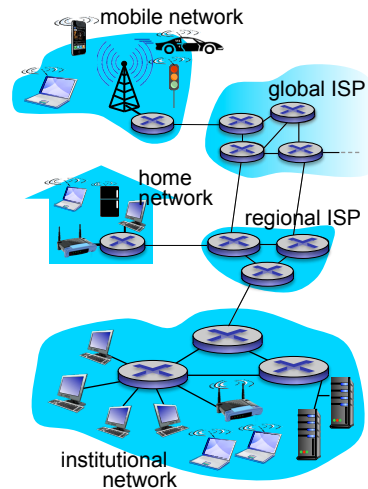

Introduction 1-7

## What's a protocol?

### *human protocols:*

- "what's the time?"
- "I have a question"
- introductions

... specific messages sent

... specific actions taken  
when messages  
received, or other  
events

### *network protocols:*


- machines rather than humans
- all communication activity in Internet governed by protocols

*protocols define format, order of messages sent and received among network entities, and actions taken on message transmission, receipt*

Introduction 1-8

# What's a protocol?

a human protocol and a computer network protocol:

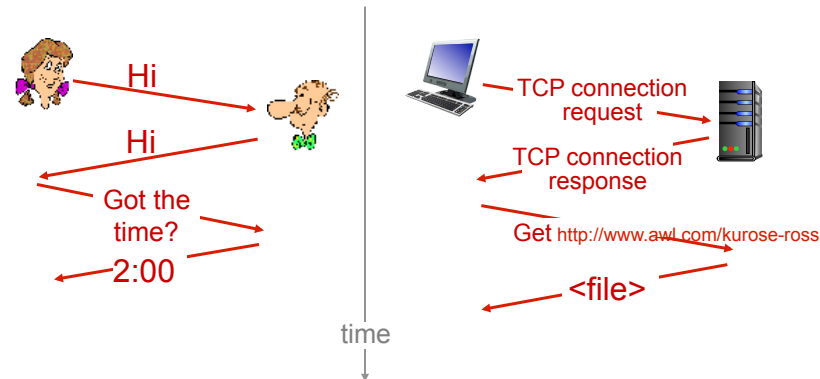

Introduction 1-9

## Chapter 1: roadmap

1.1 what is the Internet?

1.2 network edge

- end systems, access networks, links

1.3 network core

- packet switching, circuit switching, network structure


1.4 delay, loss, throughput in networks

1.5 protocol layers, service models

Introduction 1-10

## A closer look at network structure:

- **network edge:**
  - hosts: clients and servers
  - servers often in data centers
- **access networks, physical media:** wired, wireless communication links
- **network core:**
  - interconnected routers
  - network of networks

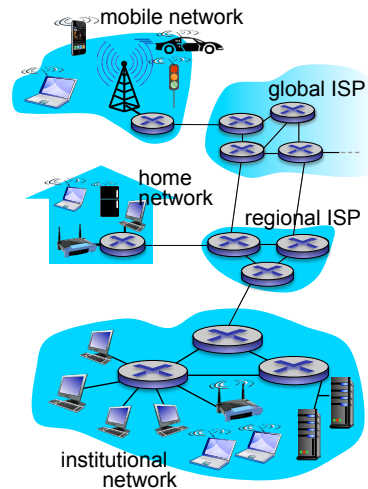

Introduction 1-11


## Access networks and physical media

**Q: How to connect end systems to edge router?**

- residential access nets
- institutional access networks (school, company)
- mobile access networks


**keep in mind:**

- bandwidth (bits per second) of access network?
- shared or dedicated?

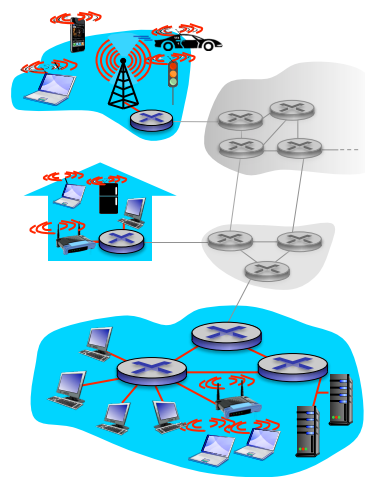

Introduction 1-12


## Access network: digital subscriber line (DSL)

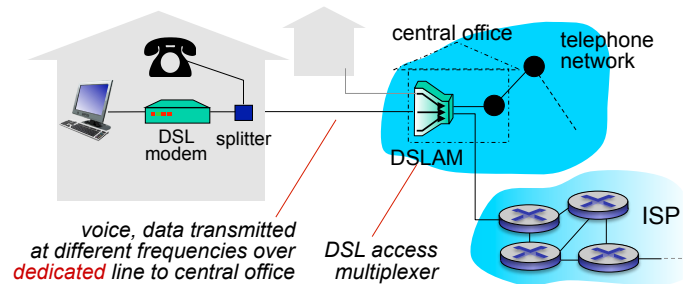

- use **existing** telephone line to central office DSLAM
  - data over DSL phone line goes to Internet
  - voice over DSL phone line goes to telephone net
- < 2.5 Mbps upstream transmission rate (typically < 1 Mbps)
- < 24 Mbps downstream transmission rate (typically < 10 Mbps)

Introduction 1-13


## Access network: cable network

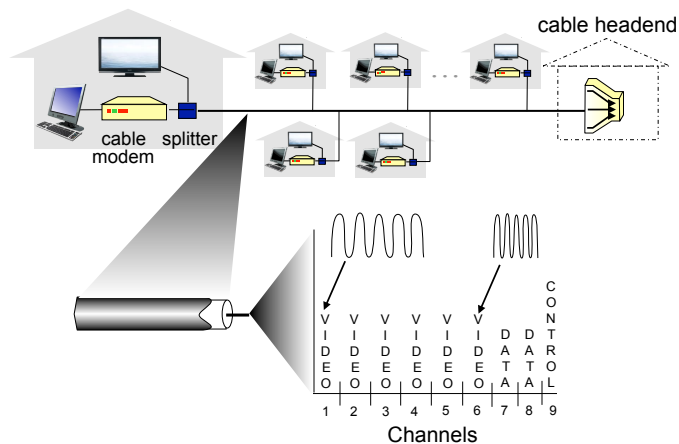

**frequency division multiplexing:** different channels transmitted in different frequency bands

Introduction 1-14


## Access network: cable network

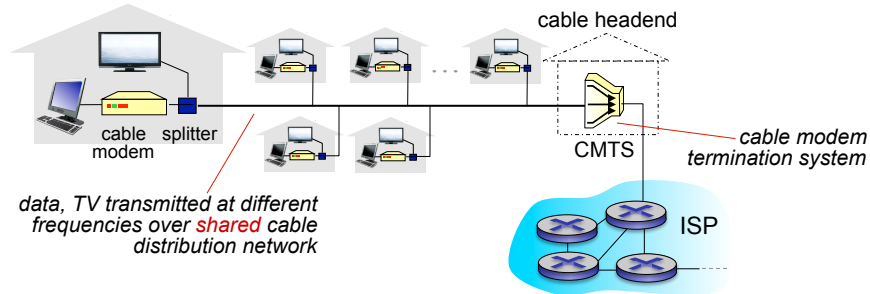

- **HFC: hybrid fiber coax**
  - asymmetric: up to 30Mbps downstream transmission rate, 2 Mbps upstream transmission rate
- **network** of cable, fiber attaches homes to ISP router
  - homes *share access network* to cable headend
  - unlike DSL, which has dedicated access to central office

Introduction 1-15


## Access network: home network

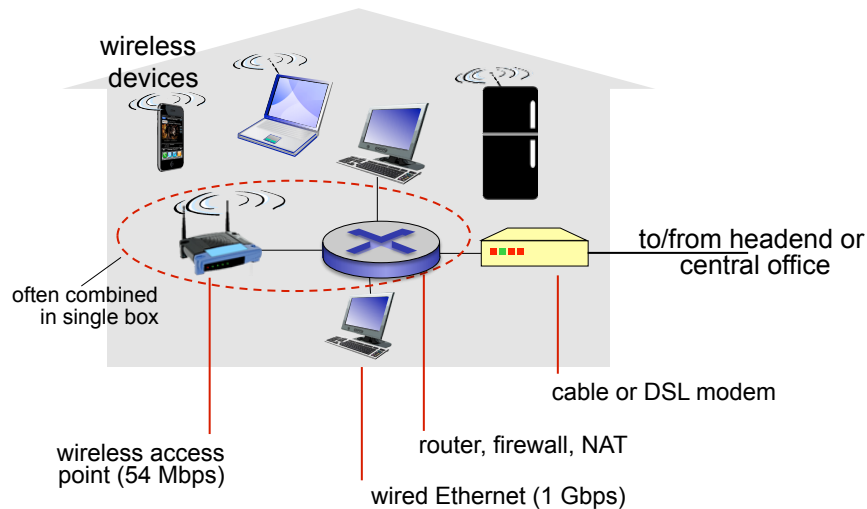

Introduction 1-16



## Enterprise access networks (Ethernet)

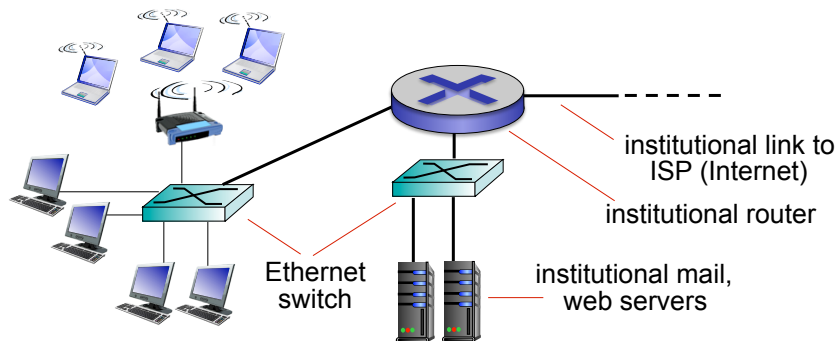

- typically used in companies, universities, etc.
- 10 Mbps, 100Mbps, 1Gbps, 10Gbps transmission rates
- today, end systems typically connect into Ethernet switch

Introduction 1-17

## Wireless access networks

- shared wireless access network connects end system to router
  - via base station aka “access point”


### wireless LANs:

- within building (100 ft.)
- 802.11b/g/n (WiFi): 11, 54, 450 Mbps transmission rate



### wide-area wireless access

- provided by telco (cellular) operator, 10's km
- between 1 and 10 Mbps
- 3G, 4G: LTE




Introduction 1-18

## Host: sends packets of data

host sending function:

- takes application message
- breaks into smaller chunks, known as *packets*, of length  $L$  bits
- transmits packet into access network at *transmission rate  $R$* 
  - link transmission rate, aka link *capacity*, aka *link bandwidth*

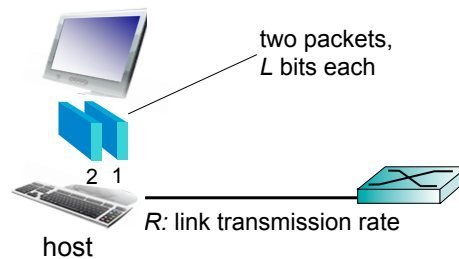

$$\text{packet transmission delay} = \text{time needed to transmit } L\text{-bit packet into link} = \frac{L \text{ (bits)}}{R \text{ (bits/sec)}}$$

Introduction 1-19

## Physical media

- **bit**: propagates between transmitter/receiver pairs
- **physical link**: what lies between transmitter & receiver
- **guided media**:
  - signals propagate in solid media: copper, fiber, coax
- **unguided media**:
  - signals propagate freely, e.g., radio

### *twisted pair (TP)*

- two insulated copper wires
  - Category 5: 100 Mbps, 1 Gbps Ethernet
  - Category 6: 10Gbps



Introduction 1-20

## Physical media: coax, fiber

### *coaxial cable:*

- two concentric copper conductors
- bidirectional
- broadband:
  - multiple channels on cable
  - HFC



### *fiber optic cable:*

- glass fiber carrying light pulses, each pulse a bit
- high-speed operation:
  - high-speed point-to-point transmission (e.g., 10' s-100' s Gbps transmission rate)
- low error rate:
  - repeaters spaced far apart
  - immune to electromagnetic noise



Introduction 1-21

## Physical media: radio

- signal carried in electromagnetic spectrum
- no physical “wire”
- bidirectional
- propagation environment effects:
  - reflection
  - obstruction by objects
  - interference

### *radio link types:*

- **terrestrial microwave**
  - e.g. up to 45 Mbps channels
- **LAN** (e.g., WiFi)
  - 54 Mbps
- **wide-area** (e.g., cellular)
  - 4G cellular: ~ 10 Mbps
- **satellite**
  - Kbps to 45Mbps channel (or multiple smaller channels)
  - 270 msec end-end delay
  - geosynchronous versus low altitude

Introduction 1-22

# Chapter 1: roadmap

## 1.1 what is the Internet?

## 1.2 network edge

- end systems, access networks, links

## 1.3 network core

- packet switching, circuit switching, network structure


## 1.4 delay, loss, throughput in networks

## 1.5 protocol layers, service models

Introduction 1-23


# The network core

- mesh of interconnected routers
- packet-switching: hosts break application-layer messages into *packets*
  - forward packets from one router to the next, across links on path from source to destination
  - each packet transmitted at full link capacity

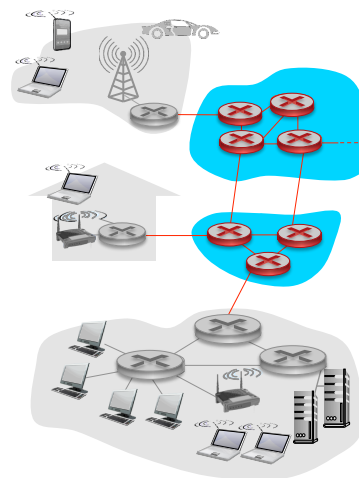

Introduction 1-24

## Packet-switching: store-and-forward

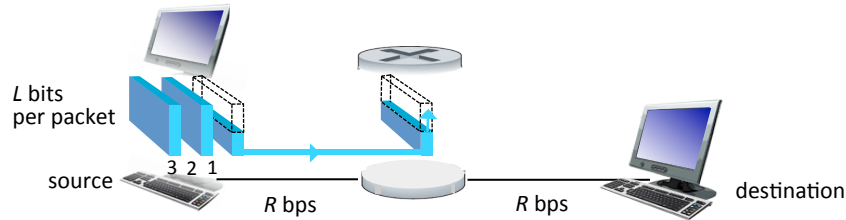

- takes  $L/R$  seconds to transmit (push out)  $L$ -bit packet into link at  $R$  bps
- **store and forward**: entire packet must arrive at router before it can be transmitted on next link
- end-end delay =  $2L/R$  (assuming zero propagation delay)


### *one-hop numerical example:*

- $L = 7.5$  Mbits
- $R = 1.5$  Mbps
- one-hop transmission delay = 5 sec

} more on delay shortly ...

Introduction 1-25

## Packet Switching: queueing delay, loss

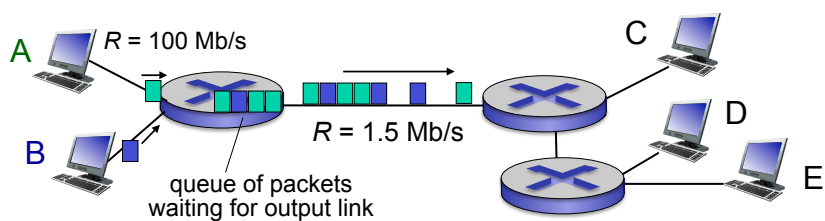

### **queueing and loss:**

- if arrival rate (in bits) to link exceeds transmission rate of link for a period of time:
  - packets will queue, wait to be transmitted on link
  - packets can be dropped (lost) if memory (buffer) fills up


Introduction 1-26

## Two key network-core functions

**routing:** determines source-destination route taken by packets

- *routing algorithms*

**forwarding:** move packets from router's input to appropriate router output

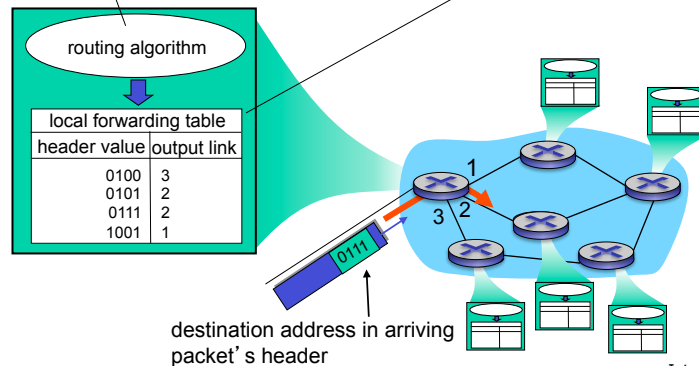


Introduction 1-27

## Alternative core: circuit switching


**end-end resources allocated to, reserved for "call" between source & dest:**

- in diagram, each link has four circuits.
  - call gets 2<sup>nd</sup> circuit in top link and 1<sup>st</sup> circuit in right link.
- dedicated resources: no sharing
  - circuit-like (guaranteed) performance
- circuit segment idle if not used by call (*no sharing*)
- commonly used in traditional telephone networks

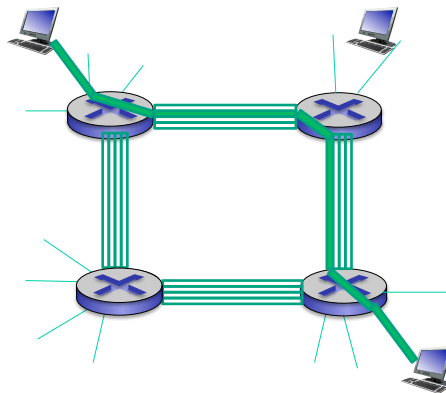

Introduction 1-28

## Circuit switching: FDM versus TDM

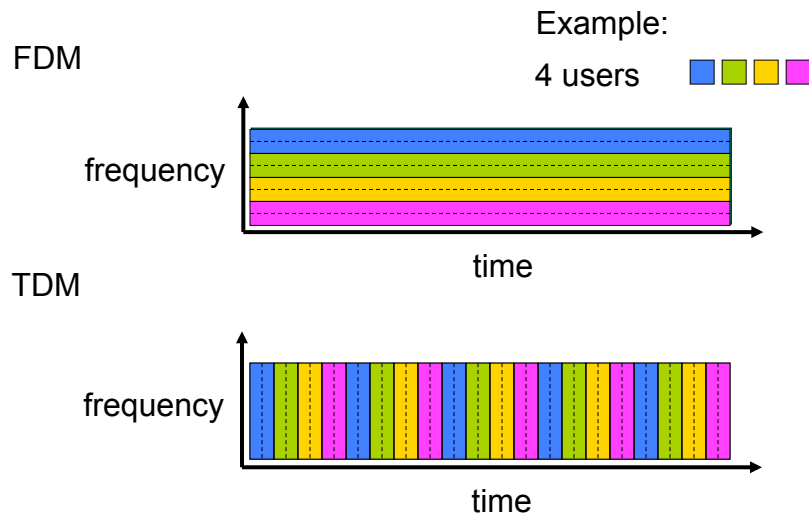


Introduction 1-29

## Packet switching versus circuit switching

*packet switching allows more users to use network!*

example:

- 1 Mb/s link
- each user:
  - 100 kb/s when "active"
  - active 10% of time
- *circuit-switching:*
  - 10 users
- *packet switching:*
  - with 35 users, probability > 10 active at same time is less than .0004 \*

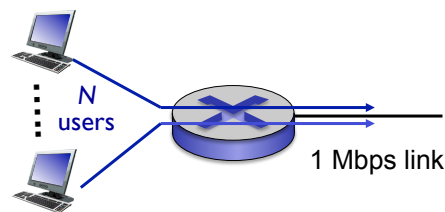

**Q:** how did we get value 0.0004?

**Q:** what happens if > 35 users ?

\* Check out the online interactive exercises for more examples: [http://gaia.cs.umass.edu/kurose\\_ross/interactive/](http://gaia.cs.umass.edu/kurose_ross/interactive/)

Introduction 1-30

## Packet switching versus circuit switching

Is packet switching a “slam dunk winner?”

- great for bursty data
  - resource sharing
  - simpler, no call setup
- **excessive congestion possible:** packet delay and loss
  - protocols needed for reliable data transfer, congestion control
- **Q: How to provide circuit-like behavior?**
  - bandwidth guarantees needed for audio/video apps
  - still an unsolved problem (chapter 7)

**Q:** human analogies of reserved resources (circuit switching) versus on-demand allocation (packet-switching)?

Introduction 1-31

## Internet structure: network of networks


- End systems connect to Internet via **access ISPs** (Internet Service Providers)
  - residential, company and university ISPs
- Access ISPs in turn must be interconnected.
  - so that any two hosts can send packets to each other
- Resulting network of networks is very complex
  - evolution was driven by **economics** and **national policies**
- Let's take a stepwise approach to describe current Internet structure

Introduction 1-32



## Internet structure: network of networks


*Question:* given *millions* of access ISPs, how to connect them together?

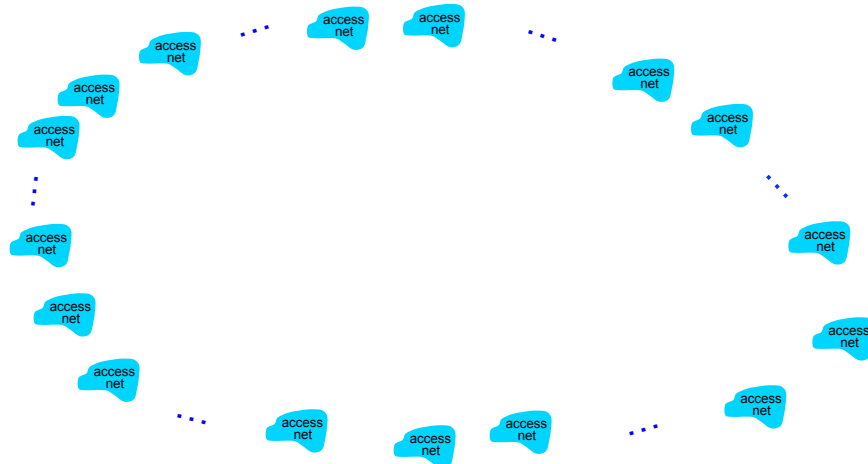

Introduction 1-33

## Internet structure: network of networks

*Option:* connect each access ISP to every other access ISP?

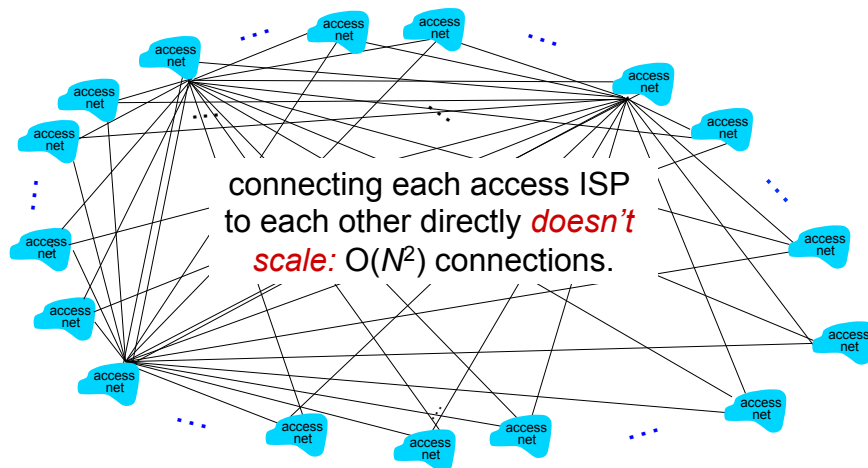


Introduction 1-34

## Internet structure: network of networks (1)

*Option: connect each access ISP to one global transit ISP?*

*Customer and provider ISPs have economic agreement.*

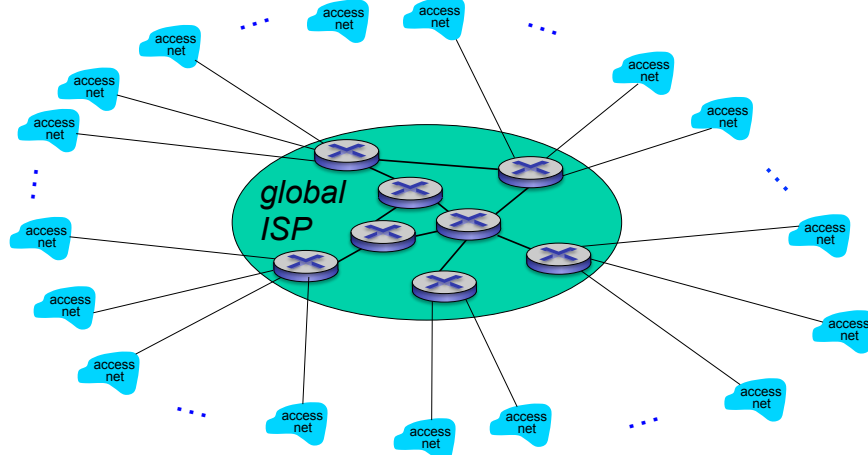


Introduction 1-35

## Internet structure: network of networks (2)

But if one global ISP is viable business, there will be competitors

....

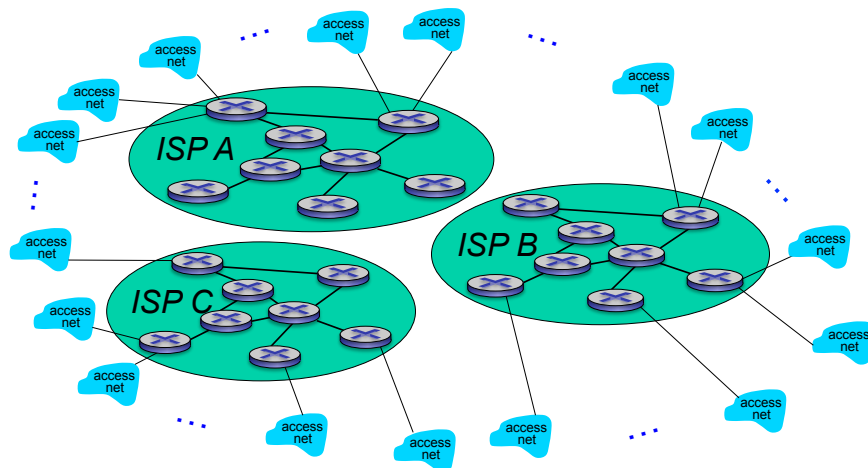

Introduction 1-36


## Internet Structure

- **Point of presence (PoP):** a group of one or more routers (at the same location) in the provider's network where customer ISPs can connect into the provider's ISP.
- **Multi-home:** an ISP (not tier-1 ISP) may connect to two or more provider ISPs
- **Peering:** ISPs at the same level connect directly to each other without going through upstream intermediaries.
- **Internet Exchange Point (IXP):** a meeting point where ISPs can peer together (stand-alone building with its own switches).

Introduction 1-37

### Internet structure: network of networks (3)


But if one global ISP is viable business, there will be competitors .... which must be interconnected

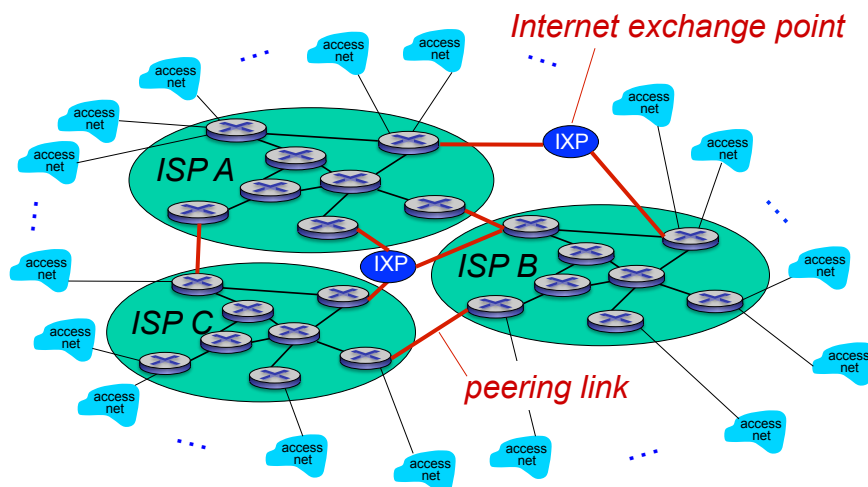

Introduction 1-38

## Internet structure: network of networks (4)


... and regional networks may arise to connect access nets to ISPs

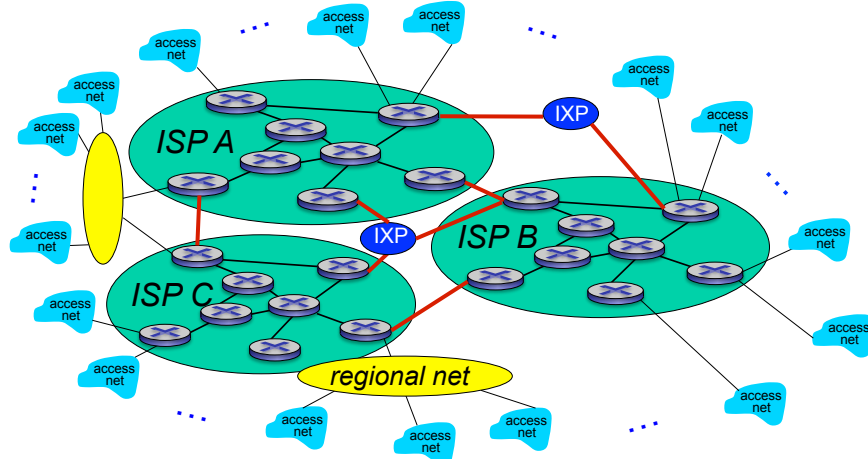

Introduction 1-39


## Internet structure: network of networks (5)

... and content provider networks (e.g., Google, Microsoft, Akamai) may run their own network, to bring services, content close to end users

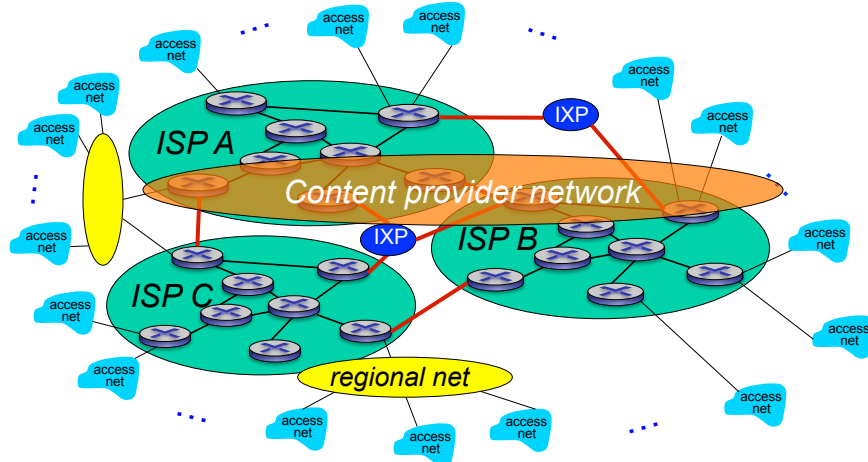

Introduction 1-40


## Internet structure: network of networks (6)

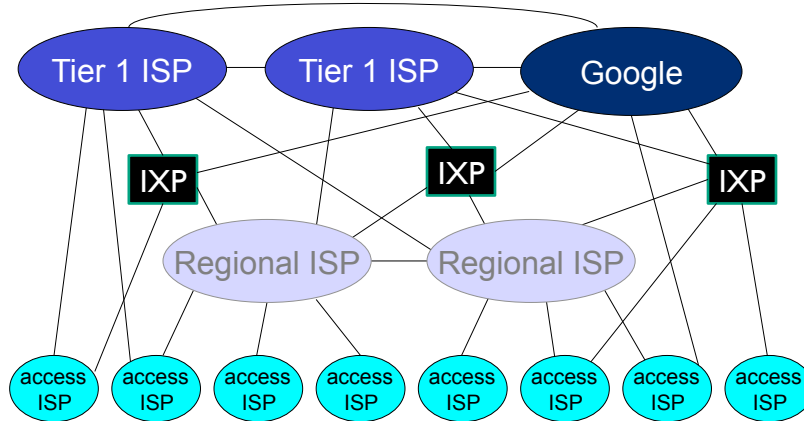

- at center: small # of well-connected large networks
  - “tier-1” commercial ISPs (e.g., Level 3, Sprint, AT&T, NTT), national & international coverage
  - content provider network (e.g., Google): private network that connects its data centers to Internet, often bypassing tier-1, regional ISPs

Introduction 1-41

## Tier-1 ISP: e.g., Sprint

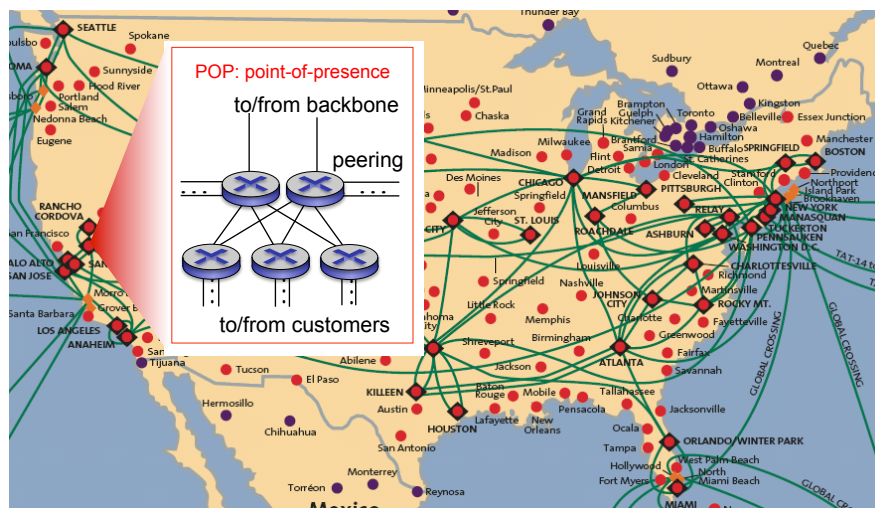

Introduction 1-42

## Chapter 1: roadmap

1.1 what is the Internet?

1.2 network edge

- end systems, access networks, links

1.3 network core

- packet switching, circuit switching, network structure

1.4 delay, loss, throughput in networks


1.5 protocol layers, service models

Introduction 1-43

## How do loss and delay occur?


packets *queue* in router buffers

- packet arrival rate to link (temporarily) exceeds output link capacity
- packets queue, wait for turn

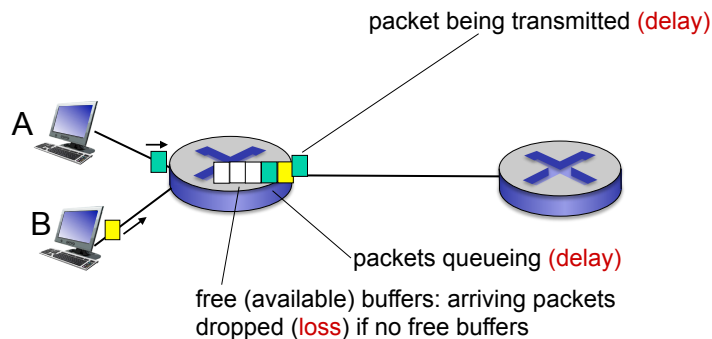

Introduction 1-44

## Four sources of packet delay

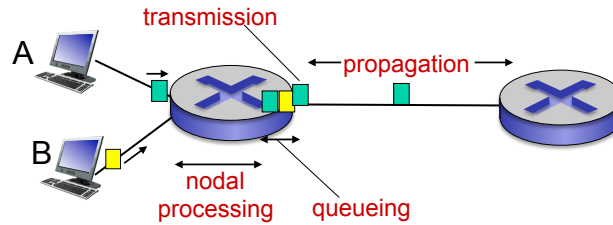

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$

### $d_{\text{proc}}$ : nodal processing


- check bit errors
- determine output link
- typically < msec

### $d_{\text{queue}}$ : queueing delay

- time waiting at output link for transmission
- depends on congestion level of router

Introduction 1-45

## Four sources of packet delay

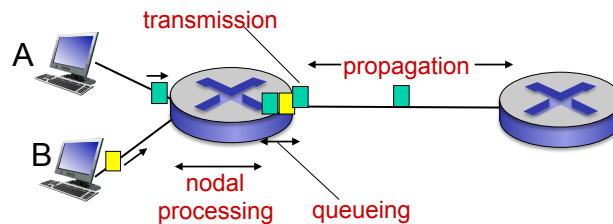

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$

### $d_{\text{trans}}$ : transmission delay:

- $L$ : packet length (bits)
- $R$ : link bandwidth (bps)

$$d_{\text{trans}} = L/R$$

←  $d_{\text{trans}}$  and  $d_{\text{prop}}$  very different →

### $d_{\text{prop}}$ : propagation delay:

- $d$ : length of physical link
- $s$ : propagation speed ( $\sim 2 \times 10^8$  m/sec)


$$d_{\text{prop}} = d/s$$

\* Check out the online interactive exercises for more examples: [http://gaia.cs.umass.edu/kurose\\_ross/interactive/](http://gaia.cs.umass.edu/kurose_ross/interactive/)

\* Check out the Java applet for an interactive animation on trans vs. prop delay

Introduction 1-46


## Caravan analogy

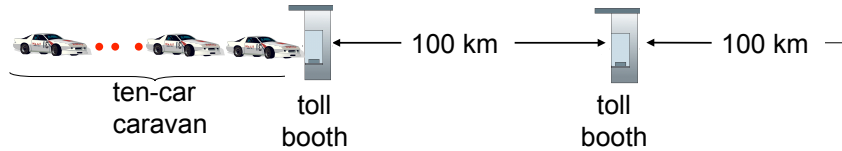

- cars “propagate” at 100 km/hr
- toll booth takes 12 sec to service car (bit transmission time)
- car ~ bit; caravan ~ packet
- **Q: How long until caravan is lined up before 2nd toll booth?**
- time to “push” entire caravan through toll booth onto highway =  $12 \times 10 = 120$  sec
- time for last car to propagate from 1st to 2nd toll booth:  $100 \text{ km} / (100 \text{ km/hr}) = 1$  hr
- **A: 62 minutes**

Introduction 1-47

## Caravan analogy (more)

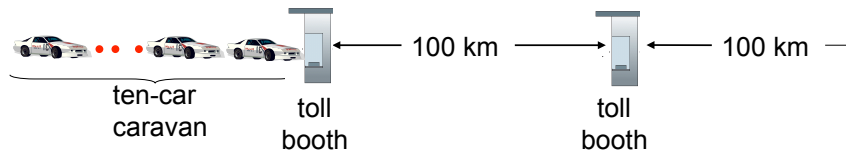


- suppose cars now “propagate” at 1000 km/hr
- and suppose toll booth now takes one min to service a car
- **Q: Will cars arrive to 2nd booth before all cars serviced at first booth?**
  - **A: Yes!** after 7 min, first car arrives at second booth; three cars still at first booth

Introduction 1-48



## Queueing delay (revisited)

- $R$ : link bandwidth (bps)
- $L$ : packet length (bits)
- $a$ : average packet arrival rate

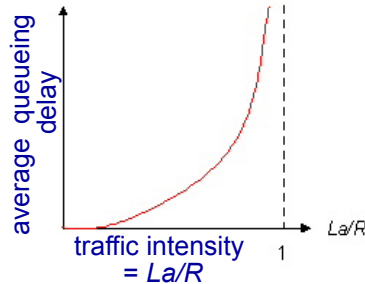

- $La/R \sim 0$ : avg. queueing delay small
- $La/R \rightarrow 1$ : avg. queueing delay large
- $La/R > 1$ : more “work” arriving than can be serviced, average delay infinite!




$La/R \rightarrow 1$

\* Check online interactive animation on queueing and loss

Introduction 1-49

## “Real” Internet delays and routes


- what do “real” Internet delay & loss look like?
- **traceroute** program: provides delay measurement from source to router along end-end Internet path towards destination. For all  $i$ :
  - sends three packets that will reach router  $i$  on path towards destination
  - router  $i$  will return packets to sender
  - sender times interval between transmission and reply.



Introduction 1-50

## “Real” Internet delays, routes

traceroute: gaia.cs.umass.edu to www.eurecom.fr



3 delay measurements from  
gaia.cs.umass.edu to cs-gw.umass.edu

```

1 cs-gw (128.119.240.254) 1 ms 1 ms 2 ms
2 border1-rt-fa5-1-0.gw.umass.edu (128.119.3.145) 1 ms 1 ms 2 ms
3 cht-vbns.gw.umass.edu (128.119.3.130) 6 ms 5 ms 5 ms
4 jn1-at1-0-0-19.wor.vbns.net (204.147.132.129) 16 ms 11 ms 13 ms
5 jn1-so7-0-0-0.wae.vbns.net (204.147.136.136) 21 ms 18 ms 18 ms
6 abilene-vbns.abilene.ucaid.edu (198.32.11.9) 22 ms 18 ms 22 ms
7 nycm-wash.abilene.ucaid.edu (198.32.8.46) 22 ms 22 ms 22 ms
8 62.40.103.253 (62.40.103.253) 104 ms 109 ms 106 ms
9 de2-1.de1.de.geant.net (62.40.96.129) 109 ms 102 ms 104 ms
10 de.fr1.fr.geant.net (62.40.96.50) 113 ms 121 ms 114 ms
11 renater-gw.fr1.fr.geant.net (62.40.103.54) 112 ms 114 ms 112 ms
12 nio-n2.cssi.renater.fr (193.51.206.13) 111 ms 114 ms 116 ms
13 nice.cssi.renater.fr (195.220.98.102) 123 ms 125 ms 124 ms
14 r3t2-nice.cssi.renater.fr (195.220.98.110) 126 ms 126 ms 124 ms
15 eurecom-valbonne.r3t2.ft.net (193.48.50.54) 135 ms 128 ms 133 ms
16 194.214.211.25 (194.214.211.25) 126 ms 128 ms 126 ms
17 ***
18 ***
19 fantasia.eurecom.fr (193.55.113.142) 132 ms 128 ms 136 ms
  
```

trans-oceanic link

\* means no response (probe lost, router not replying)

\* Do some traceroutes from exotic countries at [www.traceroute.org](http://www.traceroute.org)

Introduction 1-51

## Example of traceroute


```

indigo 308 % traceroute www.amazon.co.jp
traceroute to www.amazon.co.jp (104.93.186.112), 30 hops max, 60 byte packets
 1 gateway-94.eecs.yorku.ca (130.63.94.1) 0.776 ms 0.809 ms 0.898 ms
 2 130.63.2.61 (130.63.2.61) 7.639 ms 7.635 ms 7.626 ms
 3 border01.swx.yorku.ca (130.63.27.18) 1.011 ms 0.868 ms 0.695 ms
 4 york-hub-yorku-if-re.gtinet.ca (205.211.95.129) 1.127 ms 1.120 ms 1.157 ms
 5 ORION-GTANET-RNE.DIST2-TOR0.IP.orion.on.ca (66.97.23.125) 1.380 ms 1.082 ms 1.079 ms
 6 be202.gw01-toro.orion.on.ca (66.97.16.26) 1.501 ms 1.481 ms 1.492 ms
 7 akamai.ip4.torontointernetwork.net (206.108.34.24) 1.230 ms 1.209 ms 1.200 ms
 8 a104-93-186-112.deploy.static.akamaitechnologies.com (104.93.186.112) 1.108 ms 1.148 ms 1.127 ms
  
```

Introduction 1-52

## Packet loss

- queue (aka buffer) preceding link in buffer has finite capacity
- packet arriving to full queue dropped (aka lost)
- lost packet may be retransmitted by previous node, by source end system, or not at all

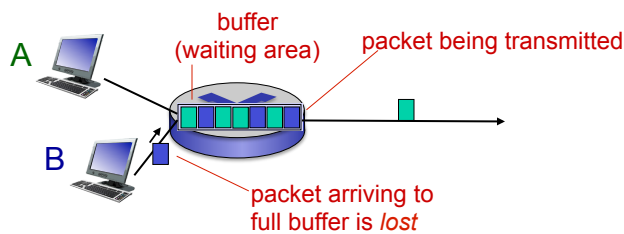


\* Check out the Java applet for an interactive animation on queuing and loss

Introduction 1-53

## Throughput


- **throughput**: rate (bits/time unit) at which bits transferred between sender/receiver
  - **instantaneous**: rate at given point in time
  - **average**: rate over longer period of time

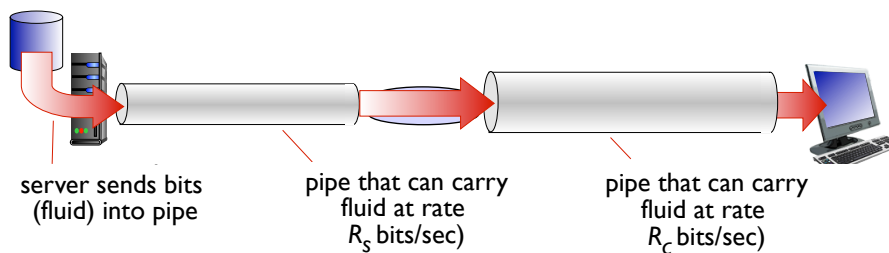


Introduction 1-54

## Throughput (more)

- $R_s < R_c$  What is average end-end throughput?



- $R_s > R_c$  What is average end-end throughput?




*bottleneck link*

link on end-end path that constrains end-end throughput

Introduction 1-55

## Throughput: Internet scenario

- per-connection end-end throughput:  
 $\min(R_c, R_s, R/10)$
- in practice:  $R_c$  or  $R_s$  is often bottleneck

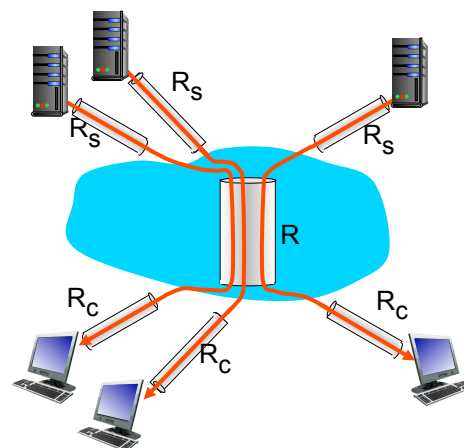

10 connections (fairly) share  
backbone bottleneck link  $R$  bits/sec

\* Check out the online interactive exercises for more  
examples: [http://gaia.cs.umass.edu/kurose\\_ross/interactive/](http://gaia.cs.umass.edu/kurose_ross/interactive/)

Introduction 1-56

## Chapter 1: roadmap

1.1 what is the Internet?

1.2 network edge

- end systems, access networks, links

1.3 network core

- packet switching, circuit switching, network structure

1.4 delay, loss, throughput in networks

1.5 protocol layers, service models

Introduction 1-57

## Protocol “layers”

*Networks are complex,  
with many “pieces”:*

- hosts
- routers
- links of various media
- applications
- protocols
- hardware, software


*Question:*

is there any hope of  
organizing structure of  
network?

.... or at least our  
discussion of networks?

Introduction 1-58


## Organization of air travel

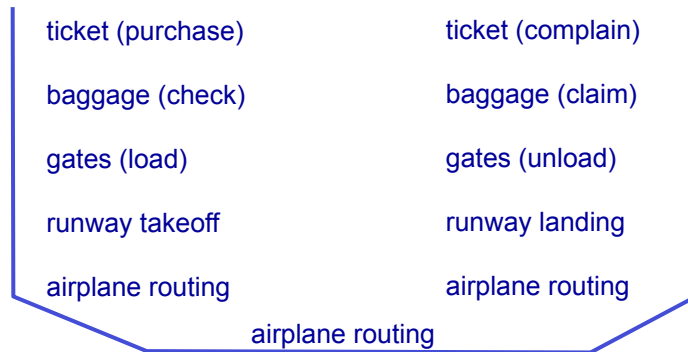

- a series of steps

Introduction 1-59

## Layering of airline functionality

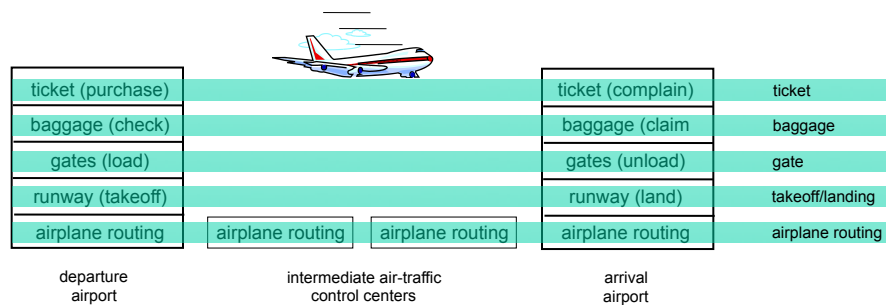

**layers:** each layer implements a service

- via its own internal-layer actions
- relying on services provided by layer below

Introduction 1-60

## Why layering?


dealing with complex systems:

- explicit structure allows identification, relationship of complex system's pieces
  - layered *reference model* for discussion
- modularization eases maintenance, updating of system
  - change of implementation of layer's service transparent to rest of system
  - e.g., change in gate procedure doesn't affect rest of system
- layering considered harmful?

Introduction 1-61

## Internet protocol stack (TCP/IP)


- *application*: supporting network applications
  - FTP, SMTP, HTTP
- *transport*: process-process data transfer
  - TCP, UDP
- *network*: routing of datagrams from source to destination
  - IP, routing protocols
- *link*: data transfer between neighboring network elements
  - Ethernet, 802.11 (WiFi), PPP
- *physical*: bits "on the wire"

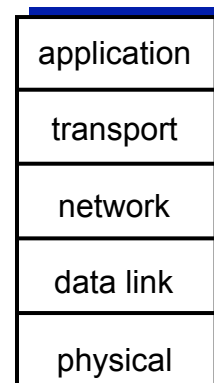


Introduction 1-62

# ISO/OSI reference model

- **presentation:** allow applications to interpret meaning of data, e.g., encryption, compression, machine-specific conventions
- **session:** synchronization, checkpointing, recovery of data exchange
- Internet stack “missing” these layers!
  - these services, *if needed*, must be implemented in application
  - needed?

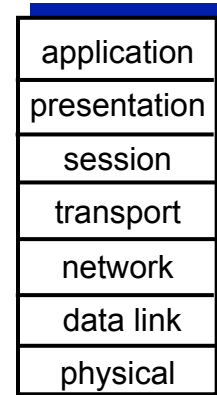

Introduction 1-63

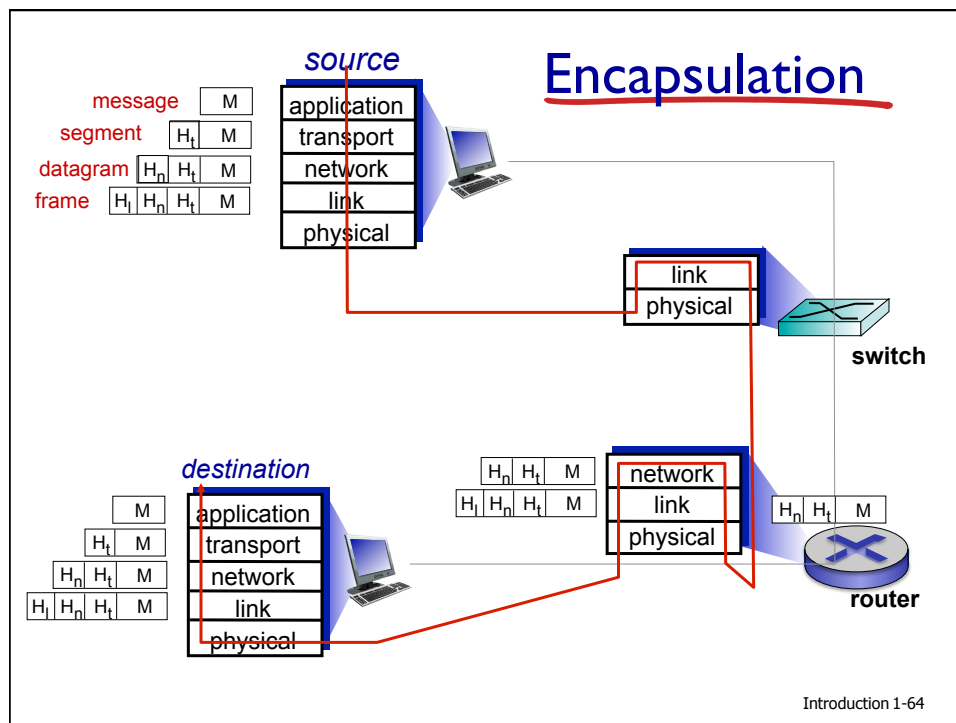

Introduction 1-64



## Introduction: summary

### *covered a “ton” of material!*

- Internet overview
- what’s a protocol?
- network edge, core, access network
  - packet-switching versus circuit-switching
  - Internet structure
- performance: loss, delay, throughput
- layering, service models

### *you now have:*

- context, overview, “feel” of networking
- more depth, detail to follow!

Introduction 1-65

## Next lecture ...

- Chapter 2 — Application Layer

Introduction 1-66

# History of the Internet (1.7)


## Reading assignment

Introduction 1-67

## Internet history

### *1961-1972: Early packet-switching principles*

- **1961:** Kleinrock - queueing theory shows effectiveness of packet-switching
- **1964:** Baran - packet-switching in military nets
- **1967:** ARPAnet conceived by Advanced Research Projects Agency
- **1969:** first ARPAnet node operational
- **1972:**
  - ARPAnet public demo
  - NCP (Network Control Protocol) first host-host protocol
  - first e-mail program
  - ARPAnet has 15 nodes



THE ARPA NETWORK

Introduction 1-68

## Internet history

### *1972-1980: Internetworking, new and proprietary nets*

- 1970: ALOHAnet satellite network in Hawaii
- 1974: Cerf and Kahn - architecture for interconnecting networks
- 1976: Ethernet at Xerox PARC
- late 70's: proprietary architectures: DECnet, SNA, XNA
- late 70's: switching fixed length packets (ATM precursor)
- 1979: ARPAnet has 200 nodes

#### Cerf and Kahn's internetworking principles:

- minimalism, autonomy - no internal changes required to interconnect networks
- best effort service model
- stateless routers
- decentralized control

#### define today's Internet architecture

Introduction 1-69

## Internet history

### *1980-1990: new protocols, a proliferation of networks*

- 1983: deployment of TCP/IP
- 1982: smtp e-mail protocol defined
- 1983: DNS defined for name-to-IP-address translation
- 1985: ftp protocol defined
- 1988: TCP congestion control
- new national networks: CSnet, BITnet, NSFnet, Minitel
- 100,000 hosts connected to confederation of networks

Introduction 1-70

## Internet history

### *1990, 2000's: commercialization, the Web, new apps*

- early 1990's: ARPAnet decommissioned
- 1991: NSF lifts restrictions on commercial use of NSFnet (decommissioned, 1995)
- early 1990s: Web
  - hypertext [Bush 1945, Nelson 1960's]
  - HTML, HTTP: Berners-Lee
  - 1994: Mosaic, later Netscape
  - late 1990's: commercialization of the Web
- late 1990's – 2000's:
  - more killer apps: instant messaging, P2P file sharing
  - network security to forefront
  - est. 50 million host, 100 million+ users
  - backbone links running at Gbps

Introduction 1-71

## Internet history

### *2005-present*

- ~5B devices attached to Internet (2016)
  - smartphones and tablets
- aggressive deployment of broadband access
- increasing ubiquity of high-speed wireless access
- emergence of online social networks:
  - Facebook: ~ one billion users
- service providers (Google, Microsoft) create their own networks
  - bypass Internet, providing “instantaneous” access to search, video content, email, etc.
- e-commerce, universities, enterprises running their services in “cloud” (e.g., Amazon EC2)

Introduction 1-72