

EECS 1028 M: Discrete Mathematics for Engineers

Suprakash Datta

Office: LAS 3043

Course page: <http://www.eecs.yorku.ca/course/1028>

Also on Moodle

Functions

- Ch 2.3 of the text
- Describe a family of transformations of inputs

“A function from A to B is an assignment of exactly one element of B to each element of A .”

Notation: $f : A \rightarrow B, f(a) = b$
- Examples:
 - $A = B = \mathbb{Z}, f(x) = x + 10$
 - $A = B = \mathbb{Z}, f(x) = x^2$
- Examples of transformations that are not functions:
 - $A = B = \mathbb{R}, f(x) = 1/x$
 - $A = B = \mathbb{R}, f(x) = \pm\sqrt{x}$
- Functions may have more than one input, e.g.,
 $f : A \times B \rightarrow C, f(a, b) = c$

Functions - 2

Notation:

$$f : A \rightarrow B$$

- A : Domain, B : Co-domain
- $\text{range}(f) = \{y \mid y = f(x) \text{ for some } x \in A\} \subseteq B$
- Compare to Java: `int floor (float real){ ... }`

Notes:

- f must be **defined** for every $a \in A$
- $f(a)$ must be **unique** for every $a \in A$

Functions - operations

Let $f_1 : A \rightarrow B, f_2 : A \rightarrow B$ be functions

- Addition: $(f_1 + f_2)(x) = f_1(x) + f_2(x)$
e.g., If $A = B = \mathbb{R}, f_1(x) = 2x, f_2(x) = x^2 + 1$, then
 $(f_1 + f_2)(x) = x^2 + 2x + 1$
- Multiplication by a scalar: $(c \cdot f_1)(x) = c \cdot f_1(x)$
e.g., If $A = B = \mathbb{R}, f_1(x) = 2x$, then $(3 \cdot f_1)(x) = 6x$
- Multiplication of functions: $(f_1 \cdot f_2)(x) = f_1(x) \cdot f_2(x)$
e.g., If $A = B = \mathbb{R}, f_1(x) = 2x, f_2(x) = x^2 + 1$, then
 $(f_1 \cdot f_2)(x) = 2x(x^2 + 1)$

Operations with Functions - 2


Composition: Let $f : A \rightarrow B$, $g : B \rightarrow C$ be functions
 Then, $g \circ f : A \rightarrow C$, $(g \circ f)(x) = g(f(x))$.

E.g., $A = B = \mathbb{R}$,

$$f(x) = 2x,$$

$$g(x) = x^2 + 1$$

- $f(g(x)) = 2(x^2 + 1)$
- $g(f(x)) = (2x)^2 + 1$

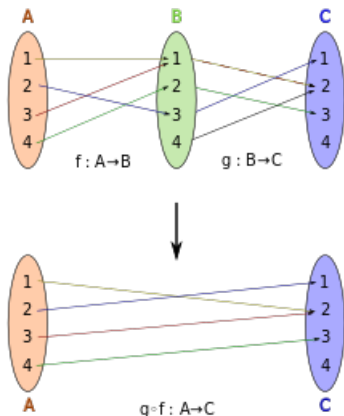


Types of Functions

- Injective (One-to-one)
- Surjective (Onto)
- Bijective (1-1 correspondence): Both injective and surjective.


Injective Functions

- “Different elements map to different elements” – or no two elements in the domain map to the same element in the range
- No two arrows point to the same element on the right hand side
- E.g.: $A = B = \mathbb{N}$, $f(n) = 2n$

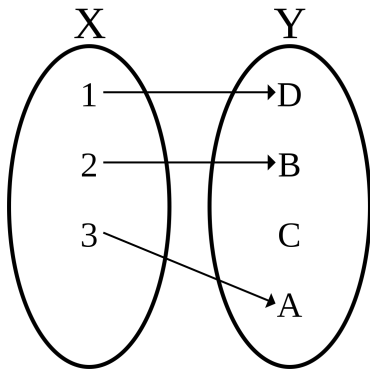


Surjective Functions

- Every elements in the range is mapped to
- Some arrow(s) point to each element on the right hand side
- E.g.:
 $A = \mathbb{R}, B = \mathbb{N}, f(n) = \lfloor 1 + x^2 \rfloor$

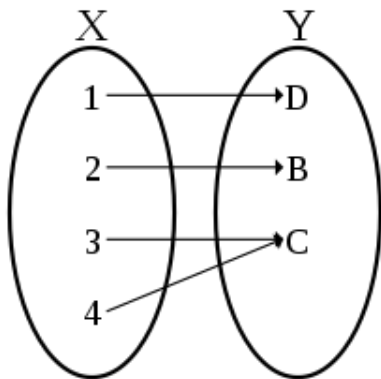

Bijjective Functions

- A bijective function is invertible
- Inverse: $f^{-1}(y) = x$ iff $f(x) = y$
- Note: $f^{-1}(x) \neq 1/f(x)$
- E.g.: $f(x) = x^3 + 2$,
 $f^{-1}(x) = \sqrt[3]{x - 2}$

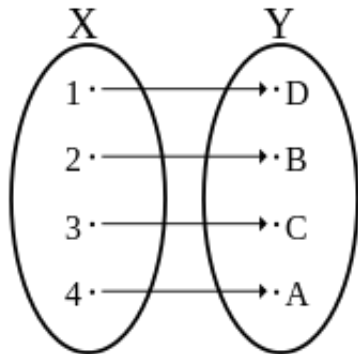

Representations of Functions

- A formula or Java code
- A graph
- A lookup table
- An ordered list (for functions on integers)
- A set of ordered pairs

Proving Injections and Surjections

- Fact: A function is injective if and only if $f(a) \neq f(b)$ whenever $a \neq b$

Use: Show that if $f(a) = f(b)$ then $a = b$

E.g., $f(x) = 2x + 1$, $f(x) = x^3$

- Fact: A function is surjective if and only if $f : A \rightarrow B$, for any $b \in B$, there must exist an $a \in A$, such that $f(a) = b$

Use: consider an arbitrary $b \in B$. Find $a \in A$ such that $f(a) = b$.

E.g., $f(x) = 2x + 1$, $f(x) = x^3$

Proving Injections and Surjections - 2

- Q12b, c, pg 153: Are these injective: $f, g : \mathbb{Z} \rightarrow \mathbb{Z}$,
 $f(n) = n^2 + 1, g(n) = n^3$?

- Q14 a, b, pg 153: Are these surjective: $f, g : \mathbb{Z} \times \mathbb{Z} \rightarrow \mathbb{Z}$,
 $f(m, n) = 2m - n, g(n) = m^2 - n^2$?

Some Special Functions

- Identity function $\mathcal{I}(x) = x$: valid on every domain
Note: For every invertible function f , $f \circ f^{-1} = f^{-1} \circ f = \mathcal{I}$
- Reals to Integers: floor, ceiling
- Integers: DecimalToBinary, BinaryToDecimal
- Reals: exponential, log
 $e^x, \ln x$ are inverses. So $e^{\ln x} = \ln e^x = x$ for every x where the functions are defined.

DecimalToBinary, BinaryToDecimal

- DecimalToBinary: E.g., $7 = 111_2$, $1001_2 = 9$

Algorithm DecimalToBinary – steps:

$n = 7$:

$$b_1 = n \bmod 2 = 1, n = n \operatorname{div} 2 = 3$$

$$b_2 = n \bmod 2 = 1, n = n \operatorname{div} 2 = 1$$

$$b_3 = n \bmod 2 = 1, n = n \operatorname{div} 2 = 0.$$

RETURN

- BinaryToDecimal: E.g., $n = 1001_2$

$$n = 1 * 2^3 + 0 * 2^2 + 0 * 2^1 + 1 * 2^0 = 9$$

More on Changing Bases

In general need to go through the decimal representation

E.g: Convert 101_7 to base 9

- Other bases to decimal: $101_7 = 1 * 7^2 + 0 * 7^1 + 1 * 7^0 = 50$

- Decimal to Base 9:

$$d_1 = n \bmod 9 = 5, n = n \div 9 = 5$$

$$b_2 = n \bmod 9 = 5, n = n \div 9 = 0.$$

STOP

So $101_7 = 55_9$.

- Changing bases that are powers of 2: Can often use shortcuts.
 - Binary to Octal: $10111101_2 = \boxed{10} \boxed{111} \boxed{101} = 275_8$
 - Binary to Hexadecimal: $10111101_2 = \boxed{1011} \boxed{1101} = BD_{16}$
 - Hexadecimal to Octal: Go through binary, not decimal.