

Notes on ESPEC

What is ESPEC?

- A collection of classes that help organize the test cases for a program
- A user adds test cases to the appropriate structure
- The **ESPEC** sub-system runs the test cases
- A report is created in one html file for each test class and one html file that combines all the reports of all the test classes.
- You read the reports with a browser.

Installing ESPEC

**There is nothing to do
Espec is now a part of the Eiffel contributed library**

Go to the following web page for more on ESPEC

<http://www.eecs.yorku.ca/~sel/espec/download.htm>

Look at example ecf files to see how ESPEC is referenced

Example use of ESPEC – part 1

- All tests in one class

```
class ROOT_CLASS
inherit ES_TEST
create make
feature
  make
  do
    add_boolean_case ( agent bool1 )
    add_violation_case ( agent viol1 )
    add_violation_case_with_tag ( "tag", agent viol1 )
    run_espec
  end
...
```

Example use of ESPEC – part 2

- Have one **TEST_CLASS** for every class you want to test

```
class TEST_CLASS
  inherit ES_TEST
  create make
  feature -- Test class creation
    ... See slide “Feature -- Test class creation”
  feature -- Test cases
    ... See slide “Feature -- Test cases”
end
```

Feature -- Test class creation

make

-- Defines the test cases to use

do

add_boolean_case (agent test_junk)

add_violation_case (agent test_precondition)

add_violation_case_with_tag

(“valid_bounds” , agent test_precondition)

end

Feature -- Test cases creation

test_junk : BOOLEAN

do

comment("test_junk")

Result := true **-- Try with false**

end

test_precondition

local array : ARRAY[STRING]

do

comment("test_precondition")

create array.make(5,1) **-- Try with make(1,5)**

-- Try after changing, on previous slide,

-- "valid_bounds" to "wrong_tag"

end

Putting many test classes together

- Have one **ROOT_TEST** for the system

```
class ROOT_TEST
```

```
  inherit ES_SUITE
```

```
  create make
```

```
  feature make
```

```
  do
```

One for each
class to test

```
    add_test ( create { TEST_CLASS_1 } . make )
```

```
    add_test ( create { TEST_CLASS_2 } . make )
```

```
    show_browser
```

```
    run_espec
```

```
  end
```

Note different
inherit class

Automatically starts the
default browser

For later runs need to
reload the page


Running the tests – method 1

Press and release – slower than a click –
the arrow beside the Run button to get the menu

The system will run when
Run is clicked BUT it will
stop at every false assertion.

Need to keep clicking Run
to continue execution
– a PAIN


Select

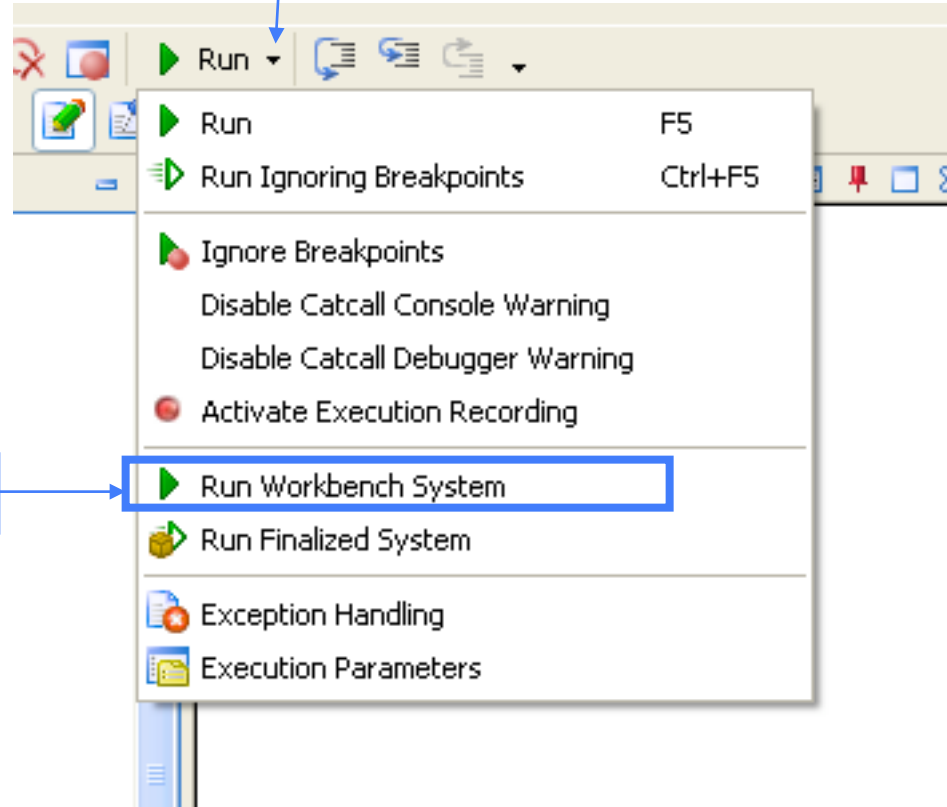

Running the tests – method 2

Click the Project button
to get the menu

Select

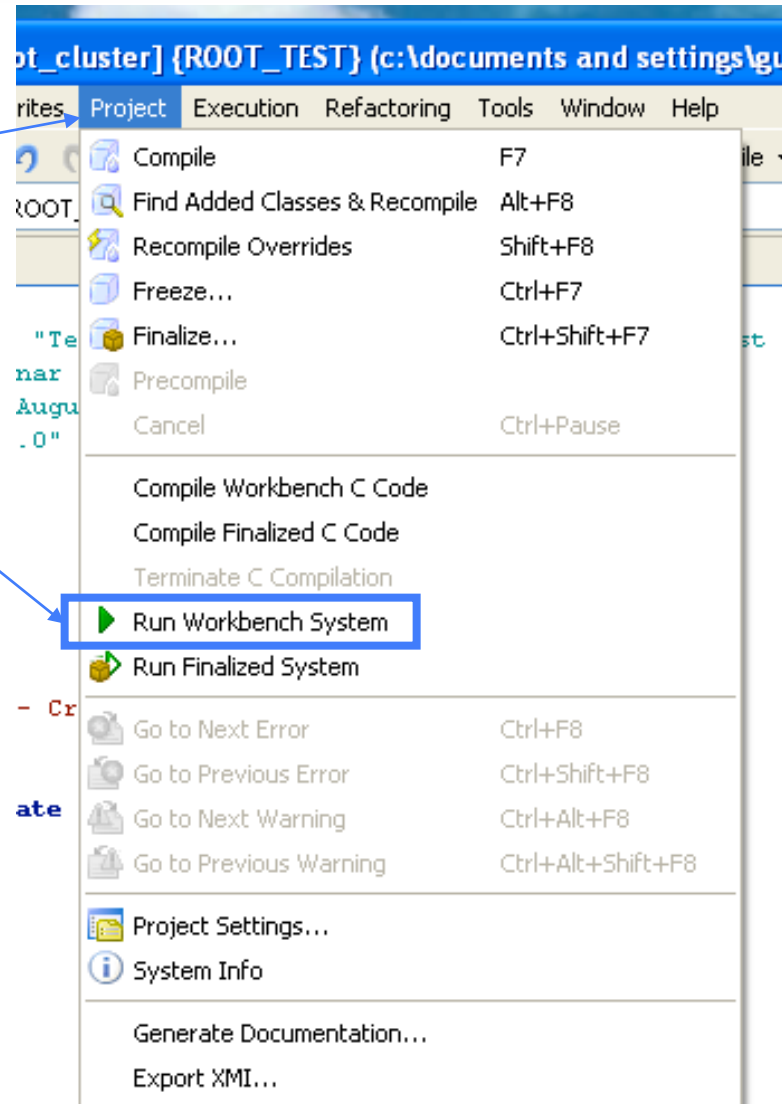

Freeze'ing the system

Click the Project button
to get the menu

Select

Sometimes, when new agents are created, the system will terminate with an error message. In that case you freeze the system.

