
# Day 9

Inverse Kinematics; Trajectory Generation

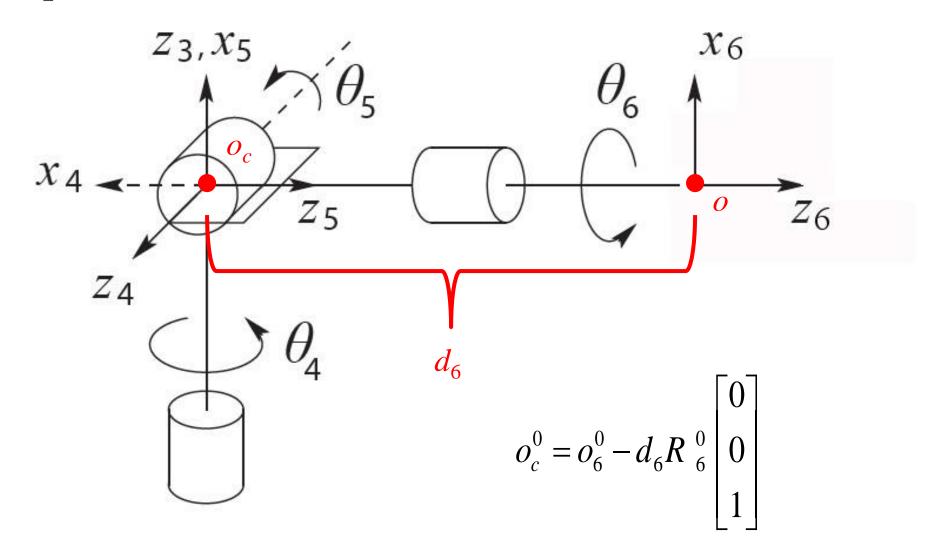

### Inverse Kinematics Recap

1. Solve for the first 3 joint variables  $q_1, q_2, q_3$  such that the wrist center  $o_c$  has coordinates

$$o_c^0 = o_6^0 - d_6 R_6^0 \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}$$

- 2. Using the results from Step 1, compute  $R_{\ 3}^{\ 0}$
- 3. Solve for the wrist joint variables  $q_4, q_5, q_6$  corresponding to the rotation matrix

$$R_{6}^{3} = (R_{3}^{0})^{T} R_{6}^{0}$$

for the spherical wrist

$$T_{6}^{3} = T_{4}^{3}T_{5}^{4}T_{6}^{5} = \begin{bmatrix} c_{4}c_{5}c_{6} - s_{4}s_{6} & -c_{4}c_{5}s_{6} - s_{4}c_{6} & c_{4}s_{5} & c_{4}s_{5}d_{6} \\ s_{4}c_{5}c_{6} + c_{4}s_{6} & -s_{4}c_{5}s_{6} + c_{4}c_{6} & s_{4}s_{5} & s_{4}s_{5}d_{6} \\ -s_{5}c_{6} & s_{5}s_{6} & c_{5} & c_{5}d_{6} \\ 0 & 0 & 1 \end{bmatrix}$$

if 
$$s_5 \neq 0$$
  
 $\theta_5^{\text{pos}} = \text{atan2}\left(\sqrt{1 - r_{33}^2}, r_{33}\right)$   
 $\theta_5^{\text{neg}} = \text{atan2}\left(-\sqrt{1 - r_{33}^2}, r_{33}\right)$ 

$$T_{6}^{3} = T_{4}^{3}T_{5}^{4}T_{6}^{5} = \begin{bmatrix} c_{4}c_{5}c_{6} - s_{4}s_{6} & -c_{4}c_{5}s_{6} - s_{4}c_{6} & c_{4}s_{5} & c_{4}s_{5}d_{6} \\ s_{4}c_{5}c_{6} + c_{4}s_{6} & -s_{4}c_{5}s_{6} + c_{4}c_{6} & s_{4}s_{5} & s_{4}s_{5}d_{6} \\ -s_{5}c_{6} & s_{5}s_{6} & c_{5} & c_{5}d_{6} \\ 0 & 0 & 1 \end{bmatrix}$$

for 
$$\theta_5^{\text{pos}}$$
,  $s_5 > 0$   
 $\theta_4 = \text{atan2}(r_{23}, r_{13})$   
 $\theta_6 = \text{atan2}(r_{32}, -r_{31})$ 

$$T_{6}^{3} = T_{4}^{3}T_{5}^{4}T_{6}^{5} = \begin{bmatrix} c_{4}c_{5}c_{6} - s_{4}s_{6} & -c_{4}c_{5}s_{6} - s_{4}c_{6} & c_{4}s_{5} & c_{4}s_{5}d_{6} \\ s_{4}c_{5}c_{6} + c_{4}s_{6} & -s_{4}c_{5}s_{6} + c_{4}c_{6} & s_{4}s_{5} & s_{4}s_{5}d_{6} \\ -s_{5}c_{6} & s_{5}s_{6} & c_{5} & c_{5}d_{6} \\ 0 & 0 & 1 \end{bmatrix}$$

for 
$$\theta_5^{\text{neg}}$$
,  $s_5 < 0$   
 $\theta_4 = \text{atan2} \left( -r_{23}, -r_{13} \right)$   
 $\theta_6 = \text{atan2} \left( -r_{32}, r_{31} \right)$ 

6 1/24/2017

• if  $\theta_5 = 0$ 

$$T_{6}^{3} = T_{4}^{3}T_{5}^{4}T_{6}^{5} = \begin{bmatrix} c_{4}c_{5}c_{6} - s_{4}s_{6} & -c_{4}c_{5}s_{6} - s_{4}c_{6} & c_{4}s_{5} & c_{4}s_{5}d_{6} \\ s_{4}c_{5}c_{6} + c_{4}s_{6} & -s_{4}c_{5}s_{6} + c_{4}c_{6} & s_{4}s_{5} & s_{4}s_{5}d_{6} \\ -s_{5}c_{6} & s_{5}s_{6} & c_{5} & c_{5}d_{6} \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$= \begin{bmatrix} c_{4}c_{6} - s_{4}s_{6} & -c_{4}s_{6} - s_{4}c_{6} & 0 & 0 \\ s_{4}c_{6} + c_{4}s_{6} & -s_{4}s_{6} + c_{4}c_{6} & 0 & 0 \\ 0 & 0 & 1 & d_{6} \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

continued from previous slide

$$= \begin{bmatrix} c_4 c_6 - s_4 s_6 & -c_4 s_6 - s_4 c_6 & 0 & 0 \\ s_4 c_6 + c_4 s_6 & -s_4 s_6 + c_4 c_6 & 0 & 0 \\ 0 & 0 & 1 & d_6 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$


$$= \begin{bmatrix} c_{4+6} & -s_{4+6} & 0 & 0 \\ s_{4+6} & c_{4+6} & 0 & 0 \\ 0 & 0 & 1 & d_6 \\ 0 & 0 & 0 & 1 \end{bmatrix} \quad \text{only the sum } \theta_4 + \theta_6 \text{ can be determined}$$

# Using Inverse Kinematics in Path Generation

#### Path Generation


- a path is defined as a sequence of configurations a robot makes to go from one place to another
- a trajectory is a path where the velocity and acceleration along the path also matter

▶ a joint-space path is computed considering the joint variables

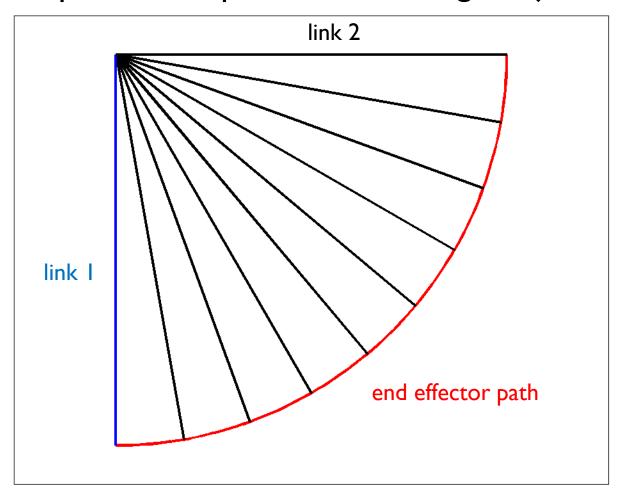

# Joint-Space Path Joint Angles

linear joint-space path

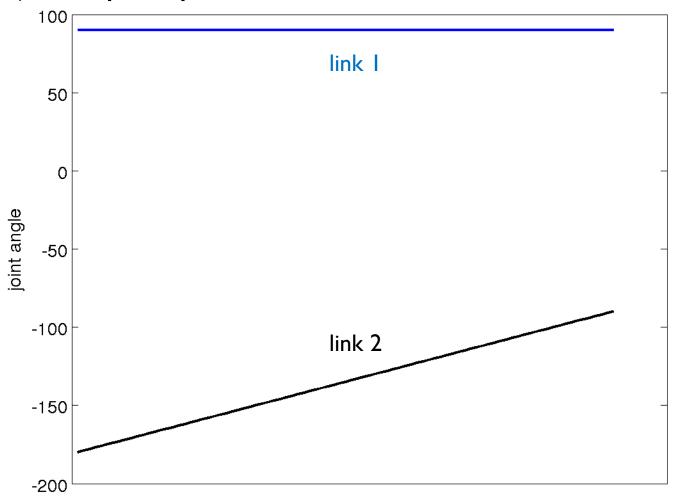

given the current end-effector pose

 $^{0}T$ 

and the desired final end-effector pose

 $^{f}T$ 

find a sequence of joint angles that generates the path between the two poses

- ▶ idea
  - solve for the inverse kinematics for the current and final pose to get the joint angles for the current and final pose
  - interpolate the joint angles

$${}^{0}T$$
  $\Rightarrow$  inverse kinematics  $\Rightarrow$   ${}^{0}Q=\begin{bmatrix}q_{1}\\q_{2}\\\vdots\\q_{n}\end{bmatrix}$ 


$${}^fT$$
  $\Rightarrow$  inverse kinematics  $\Rightarrow$   ${}^fQ=\begin{bmatrix}q_1\\q_2\\\vdots\\q_n\end{bmatrix}$ 

```
find {}^0Q from {}^0T
find fQ from fT
\Delta t = 1 / m
\Delta Q = {}^f Q - {}^0 Q
for j = 1 to m
  t_i = j \Delta t
  {}^{j}Q = {}^{0}Q + t_{j} \Delta Q
   set joints to jQ
end
```

- linearly interpolating the joint variables produces
  - a linear joint-space path
  - a non-linear Cartesian path
- depending on the kinematic structure the Cartesian path can be very complicated
  - some applications might benefit from a simple, or well defined,
     Cartesian path


## Cartesian-Space Path

> a Cartesian-space path considers the position of end-effector

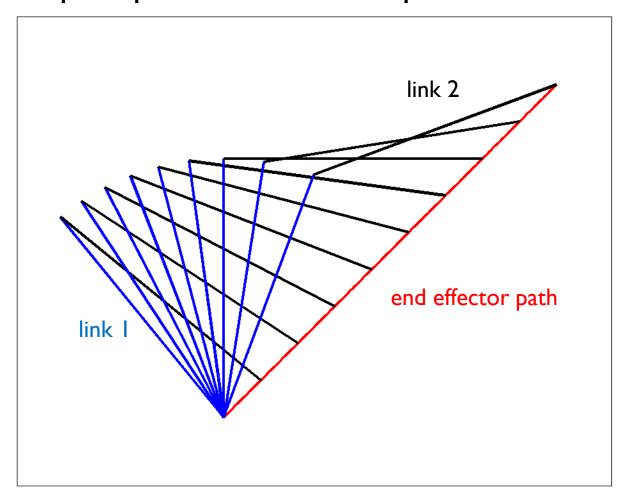

# Cartesian-Space Path Joint Variable 1

non-linear joint-space path

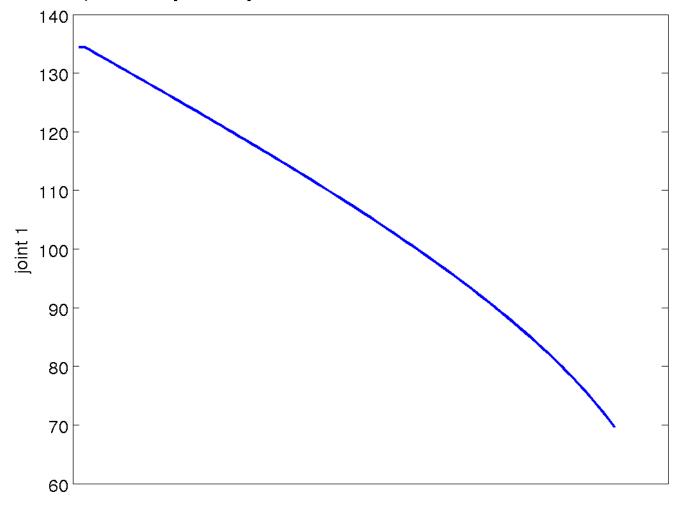

#### Cartesian-Space Path Joint Variable 2

non-linear joint-space path

