

Design Pattern Detection


Design Patterns

- A design pattern systematically names, explains and evaluates an important and recurring design problem and its solution
- Good designers know not to solve every problem from first principles
 - They reuse solutions
- This is very different from code reuse

Design Patterns - Definition

From the Gang of Four textbook

Design patterns are descriptions of communicating objects and classes that are customized to solve a general design problem in a particular context

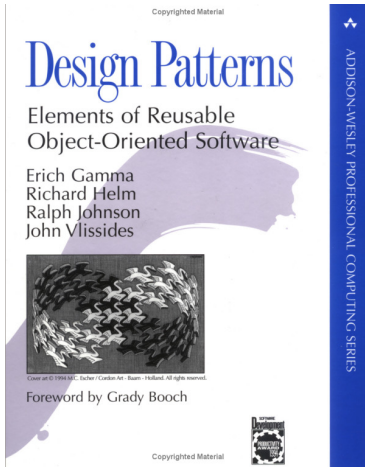

Essential Elements of a Design Pattern

- Name
 - Naming a pattern increases our design vocabulary
- Problem
 - When to apply the pattern
- Solution
 - Elements that make up the design, their relationships, responsibilities, and collaborations
- Consequences
 - Results and trade-offs of applying the pattern

How Design Patterns Solve Design Problems

- Finding appropriate objects
- Determining object granularity
- Specifying object interfaces
- Specifying object implementations
- Putting reuse mechanisms to work
 - Inheritance vs. Composition
 - Delegation
- Designing for change

Pattern Benefits

- Enable large scale reuse of software architectures
- Explicitly capture expert knowledge and design trade-offs
- Help improve developer communication
- Help ease the transition to OO methods

Pattern Drawbacks

- Patterns do not lead to direct code reuse
- Patterns are often deceptively simple
- You may suffer from pattern overload
- Patterns must be validated by experience and debate rather than automated testing
- Integrating patterns into a process is human intensive rather than a technical activity

Pattern Description Template

- Name
- Intent
 - What does the pattern do? What problems does it address?
- Motivation
 - A scenario of pattern applicability
- Applicability
 - In which situations can this pattern be applied
- Participants
 - Describe participating classes/objects

Pattern Description Template (cont.)

- Collaborations
 - How do the participants carry out their responsibilities?
- Diagram
 - Graphical representation of the pattern
- Consequences
 - How does the pattern support its objectives?
- Implementation
 - Pitfalls, language specific issues
- Examples

- **Structural**

- Deal with decoupling interface and implementation of classes and objects

- **Behavioural**

- Deal with dynamic interaction among collections of classes and objects

- **Creational**

- Deal with initializing and configuring collections of classes and objects

Detecting design patterns

- A difficult task
- Patterns are primarily a literary form
- No rigorous mathematical definitions
- Automatic detection beyond the state of the art of Artificial Intelligence
- Instead, detect the artifacts of implementing the solution of the design pattern
- Purely structural patterns are easier to detect
- Purely behavioural patterns are much harder
- Most patterns are somewhere in the middle

- A template solution needs to be both


Distinctive

- The static structure is not likely to be represented in a design that does not use the pattern

Unambiguous

- Can only be done in one way (or in a small number of variants)
- An object adapter is unambiguous but not distinctive

Object Adapter Static Structure

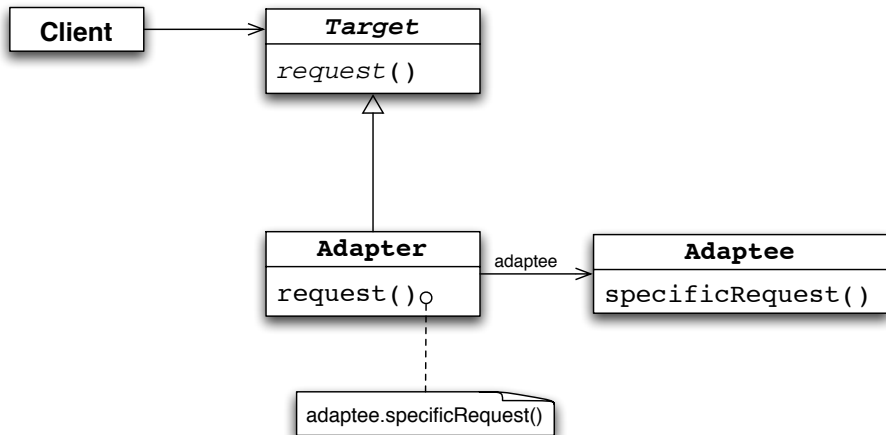

Composite vs. Decorator

- A Decorator is sometimes referred to as a degenerate Composite.
- The static structure of the two patterns is very similar
- The dynamic behaviour is also the same
- Static difference: A Composite contains a collection of Components, while a Decorator contains only one
- Intent difference: The Composite pattern groups components into a whole. The Decorator patterns enhances the responsibility of a component.

State vs. Strategy

- Both patterns allow flexible choice from a set of alternatives
- In their simple variants, the static structure and the dynamic behaviour are exactly the same
- The difference: Choosing a particular behaviour (State) vs. choosing a particular algorithm (Strategy)

- Both static and dynamic analysis are necessary in order to detect patterns
- Static analysis
 - The static structure of the pattern has to match a subgraph of the static structure of the software system
- Dynamic analysis
 - Message passing during run-time has to match the message flow that implements the behaviour of the pattern

Design Pattern Instances

- Each design pattern has a fixed set of roles, e.g. in the Adapter pattern, there is a Client, a Target, an Adapter, and an Adaptee
- Every detection technique attempts to discover instances of the design pattern in the software system being examined
- A design pattern *instance* is a set of classes that match the roles

Design Pattern Detection Research Issues

- False positive elimination
 - The precision of most published approaches is quite poor, often below 50%
- Dealing with Variants
 - Patterns are conceptual. Their implementation may vary considerably depending on the specific context
- Counting instances
 - Different detection approaches do it differently

Detecting Design Patterns in Java software with PDE

- PDE is a tool that collects static and dynamic facts from a system written in Java and detects design patterns in it
- It will be installed on indigo by the end of the month
- A possible course project is to apply PDE to an open source system and evaluate the results

- Every pattern has a static definition, e.g.
uses client target
inherits adapter target
uses adapter adaptee
- Javex and grok are used to extract static facts
such as
uses ClassA ClassB
inherits ClassC ClassB
uses ClassC ClassD
- QL matches the static definition to the static facts

- Every pattern has a dynamic definition in XML

```
<entry className="adapter"  
  calledByClass="client"  
  thisObject="object1"  
  nextCallInSubtree="yes">  
  <entry className="adaptee"  
    calledByClass="adapter"  
    calledByObject="object1"  
    thisObject="object2">  
      </entry>  
    </entry>
```

- Probekit is used to collect dynamic facts such as

```
<entry
```

```
  calledByClass="ContactAdapter"
```

```
  calledByMethod="setTitle"
```

```
  calledByObject="ContactAdapter@145"
```

```
  className="ChovnatlhImpl"
```

```
  methodName="cherPatlh"
```

```
  thisObject="ChovnatlhImpl@110">
```

- If the dynamic facts do not match the dynamic definition the candidate instance is deemed a false positive

Results with sample pattern implementations

- PDE detects 22/23 patterns
 - Except Facade, all patterns are detected
 - Facade is more an architectural design pattern
- PINOT detects 17/23
 - Pattern definitions are hard coded
- FUJABA detects 14/23
 - Behavioral patterns hard to detect

| | PDE | PINOT | FUJABA |
|------------------|-------|-------|--------|
| Creational | | | |
| Abstract Factory | ✓ | ✓ | ✓ |
| Builder | ✓ | - | - |
| Factory Method | ✓ | ✓ | ✓ |
| Prototype | ✓ | - | # |
| Singleton | ✓ | ✓ | ✓ |
| Structural | | | |
| Adapter | ✓ | ✓ | ✓ |
| Bridge | ✓ | ✓ | ✓ |
| Composite | ✓ | # | ✓ |
| Decorator | ✓ | ✓ | ✓ |
| Facade | - | ✓ | - |
| Flyweight | ✓ | ✓ | ✓ |
| Proxy | ✓ | ✓ | ✓ |
| Behavioral | | | |
| Chain of Resp. | ✓ | ✓ | - |
| Command | ✓ | - | - |
| Interpreter | ✓ | - | - |
| Iterator | ✓ | - | ✓ |
| Mediator | ✓ | ✓ | - |
| Memento | ✓ | ✓ | - |
| Observer | ✓ | ✓ | ✓ |
| State | ✓ | ✓ | # |
| Strategy | ✓ | ✓ | ✓ |
| Template Method | ✓ | ✓ | ✓ |
| Visitor | ✓ | ✓ | ✓ |
| Sum | 22/23 | 17/23 | 14/23 |

PDE Full Results

| | | | | | | | | | | | | | | | | | | | |
|-------------------------|---|---|---|---|----|---|----|---|---|---|---|----|---|---|---|---|---|---|---|
| Abstract Factory | 4 | | 8 | | | | | | | | | | | | | | | | |
| Factory Method | 2 | 1 | 1 | | | | | | | | 2 | | | 2 | | | | | |
| Adapter | 1 | | 1 | | | | | | | | | | | | | | | | |
| Bridge | | | 2 | 2 | | | | | | | | | | | | | | 1 | |
| Builder | | | 1 | | 3 | | 3 | | | | | 11 | | | | | | 1 | |
| Chain of Responsibility | | | | | | 2 | | | | | | | | | | | | | |
| Command | 1 | | 2 | | | | 3 | | | | | 9 | | | 1 | 2 | 2 | | |
| Composite | | | | | 2 | | 4 | | | | | | | | | | 4 | 1 | |
| Decorator | 2 | | 2 | | 3 | | | 4 | | | | 3 | | | | 1 | | | |
| Flyweight | 1 | | | | | | | 2 | 1 | | 2 | 2 | | | | | | 2 | |
| Interpreter | 3 | | 3 | | | 6 | | 6 | | 2 | | | | | | | | 8 | |
| Iterator | | | | | | | | | | 1 | | | | | | | | | |
| Mediator | 1 | | | | 4 | | 12 | | | 3 | | 3 | 4 | 8 | | 1 | 2 | 4 | |
| Memento | | | | | | | | | | | | | 1 | | | 1 | | | |
| Observer | | | | | | | | | | | 2 | 13 | 2 | | | 1 | 2 | | |
| Prototype | | | | | | | | | | | | 1 | | 1 | | | | | |
| Proxy | 2 | | 3 | | | | | | | | | 1 | | | 1 | | | | |
| Singleton | | | | | | | | | | | | 2 | | | | 2 | | | |
| State | 1 | | 2 | | | 1 | 4 | | | 1 | 2 | 3 | 6 | | 1 | 2 | 2 | 2 | |
| Strategy | | | 2 | | | | 2 | | | | 2 | | 2 | | | 2 | | 1 | |
| Template Method | | | 2 | | | 1 | | | | | | 2 | | | | | 1 | | 1 |
| Visitor | 3 | | | | 12 | | 12 | | | 1 | 3 | | 3 | | | | 4 | 3 | 1 |