

EECS 2011 Fundamentals of Data Structures

Computer programming is an art, because it applies accumulated knowledge to the world, because it requires skill and ingenuity, and especially because it produces objects of beauty.

- Donald Knuth

Instructor


- James Elder
 - 0003G Lassonde Engineering Building
tel: (416) 736-2100 ext. 66475 fax: (416) 736-5857
email: jelder@yorku.ca website: www.yorku.ca/jelder
 - Office Hour: Thursday 14:30-15:30

Course Website

- www.eecs.yorku.ca/course/2011Z

Textbook

- Goodrich, M.T., Tamassia R. & Goldwasser, M.H. (2014). *Data Structures and Algorithms in Java (6th ed.)* John Wiley & Sons.
 - Amazon.ca: \$156.24 (\$51.20 on Kindle)
 - Chapters.indigo.ca: \$157.82
 - York Bookstore: \$174.95

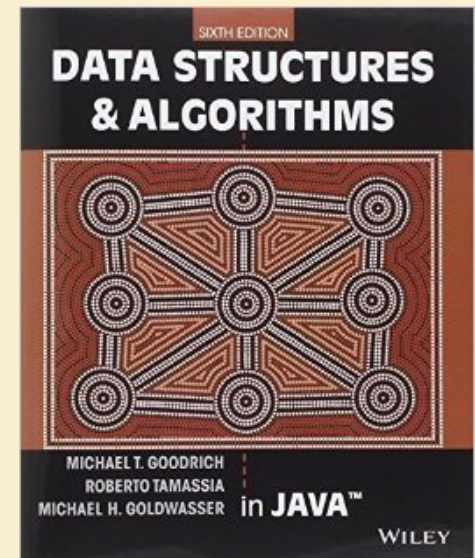

Summary of Requirements

Component	Weight
Programming Assignments	20%
Midterm test (closed book)	30%
Final exam (closed book)	50%

Please see syllabus posted on website for more detailed information.

How to do well in this course

1. Attend all of the lectures!
2. Do the readings **prior** to each lecture.
3. Work hard on each assignment.
 1. Do not leave them to the last moment.
 2. Ask one of the TAs or me if there is something you do not understand.
4. Do the problem sets before the midterm and final exam
 1. These are not graded, but the problems are similar to those you will find on the midterm and final, and so will help you prepare.

Try to pay attention!

Computers & Education 62 (2013) 24–31



Contents lists available at [SciVerse ScienceDirect](#)

Computers & Education

journal homepage: www.elsevier.com/locate/compedu



Laptop multitasking hinders classroom learning for both users and nearby peers

Faria Sana^a, Tina Weston^{b,c}, Nicholas J. Cepeda^{b,c,*}

^aMcMaster University, Department of Psychology, Neuroscience, & Behaviour, 1280 Main Street West, Hamilton, ON L8S 4K1, Canada

^bYork University, Department of Psychology, 4700 Keele Street, Toronto, ON M3J 1P3, Canada

^cYork University, LaMarsh Centre for Child and Youth Research, 4700 Keele Street, Toronto, ON M3J 1P3, Canada

ARTICLE INFO

Article history:

Received 11 September 2012

Received in revised form

5 October 2012

Accepted 12 October 2012

Keywords:

Laptops

Multitasking

ABSTRACT

Laptops are commonplace in university classrooms. In light of cognitive psychology theory on costs associated with multitasking, we examined the effects of in-class laptop use on student learning in a simulated classroom. We found that participants who multitasked on a laptop during a lecture scored lower on a test compared to those who did not multitask, and participants who were in direct view of a multitasking peer scored lower on a test compared to those who were not. The results demonstrate that multitasking on a laptop poses a significant distraction to both users and fellow students and can be detrimental to comprehension of lecture content.

© 2012 Elsevier Ltd. Open access under [CC BY-NC-ND license](#).

Please ask questions!

Help me know what people
are not understanding!



Course Outline

- Introduction
- Analysis Tools
- Linear Data Structures
- The Java Collections Framework
- Recursion
- Trees
- Priority Queues & Heaps
- Maps, Hash Tables, Dictionaries
- Loop Invariants & Binary Search
- Search Trees
- Comparison Sorts
- Linear Sorts
- Graphs – ADTs & Implementations
- Graphs – Depth First Search
- Graphs – Breadth First Search

On the slides

- These slides:
 - are posted on the course website.
 - may change up to the last minute as I polish the lecture.
 - Incorporate slides produced by the textbook authors (Goodrich & Tamassia).
- I will also post recorded lectures (voice + slides)
 - However, I encourage you to attend in person for a better experience.

Lecture 1

Data Structures and Object-Oriented Design

Data Structures & Object-Oriented Design

- Definitions
- Principles of Object-Oriented Design
- Hierarchical Design in Java
- Abstract Data Types & Interfaces
- Casting
- Generics
- Pseudo-Code

Data Structures & Object-Oriented Design

- **Definitions**
- Principles of Object-Oriented Design
- Hierarchical Design in Java
- Interfaces
- Casting
- Generics
- Pseudo-Code

Programs = Data Structures + Algorithms

Principles of Object Oriented Design


- Programs consist of objects.
- Objects consist of
 - Data structures
 - Algorithms to construct, access and modify these structures.

Data Structure

- **Definition:** An organization of information, usually in memory, such as a queue, stack, linked list, heap, dictionary, or tree.

Algorithm

- **Definition:** A finite set of unambiguous instructions performed in a prescribed sequence to achieve a goal, especially a mathematical rule or procedure used to compute a desired result.
 - The word *algorithm* comes from the name of the 9th century Persian mathematician Muhammad ibn Mūsā al-Khwārizmī.
 - He worked in Baghdad at the time when it was the centre of scientific studies and trade.
 - The word algorism originally referred only to the rules of performing arithmetic using Arabic numerals but evolved via European Latin translation of al-Khwarizmi's name into *algorithm* by the 18th century.
 - The word evolved to include all definite procedures for solving problems or performing tasks.

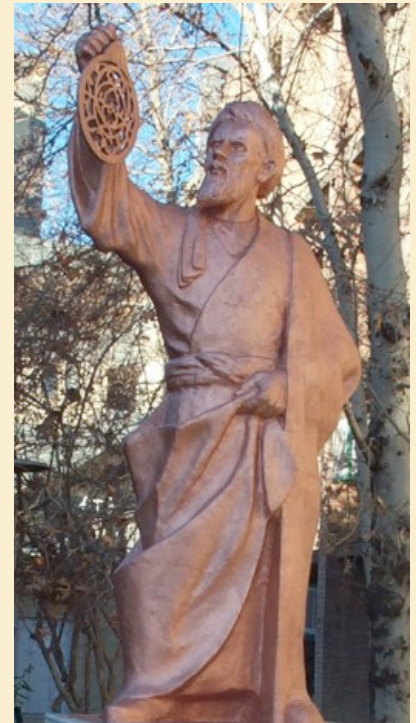

Data Structures We Will Study

- Linear Data Structures
 - Arrays
 - Linked Lists
 - Stacks
 - Queues
 - Priority Queues
- Non-Linear Data Structures
 - Trees
 - Heaps
 - Hash Tables
 - Search Trees
- Graphs
 - Unirected Graphs
 - Directed Graphs
 - Directed Acyclic Graphs

Some Algorithms We Will Study

- Searching
- Sorting
- Graph Search
- Topological Sorts

Please see syllabus posted on website for detailed schedule (tentative).

Design Patterns

- A template for a software solution that can be applied to a variety of situations.
- Main elements of solution are described in the abstract.
- Can be specialized to meet specific circumstances.
- Example algorithm design patterns:
 - Recursion
 - Divide and Conquer

Data Structures & Object-Oriented Design

- Definitions
- **Principles of Object-Oriented Design**
- Hierarchical Design in Java
- Abstract Data Types & Interfaces
- Casting
- Generics
- Pseudo-Code

Software Engineering

- Software must be:
 - Readable and understandable
 - Allows correctness to be verified, and software to be easily updated.
 - Correct and complete
 - Works correctly for all expected inputs
 - Robust
 - Capable of handling unexpected inputs.
 - Adaptable
 - All programs evolve over time. Programs should be designed so that re-use, generalization and modification is easy.
 - Portable
 - Easily ported to new hardware or operating system platforms.
 - Efficient
 - Makes reasonable use of time and memory resources.

Premature Optimization

- *Premature optimization is the root of all evil.*
 - Donald Knuth

Premature Optimization

- In general we want programs to be efficient. But:
 - Obviously it is more important that they be correct.
 - It is often more important that they be
 - Understandable
 - Easily adapted
 - In striving for efficiency, it is easy to:
 - Introduce bugs
 - Make the program incomprehensible
 - Make the program very specific to a particular application, and thus hard to adapt or generalize.

Asymptotic Analysis

- Asymptotic analysis is a general method for categorizing the efficiency of algorithms.
- Asymptotic analysis helps to distinguish efficiencies that are important from those that may be negligible.
- This will help us to balance the goal of efficiency with other goals of good design.
- This will be the topic of **Lecture 2**.

Principles of Object Oriented Design

- Object oriented design makes it easier to achieve our software engineering goals:
 - Comprehensibility
 - Software re-use
 - Adaptation (to new scenarios)
 - Generalization (to handle many scenarios simultaneously)
 - Portability (to new operating systems or hardware)

Principles of Object-Oriented Design

- Modularity
- Encapsulation
- Abstraction
- Hierarchical Organization


Modularity

- Complex software systems are hard to conceptualize and maintain.
- This is greatly facilitated by breaking the system up into distinct modules.
- Each module has a well-specified job.
- Modules communicate through well-specified interfaces.



Encapsulation

- Each object reveals only what other objects need to see.
- Internal details are kept private.
- This allows the programmer to implement the object as she or he wishes, as long as the requirements of the abstract interface are satisfied.

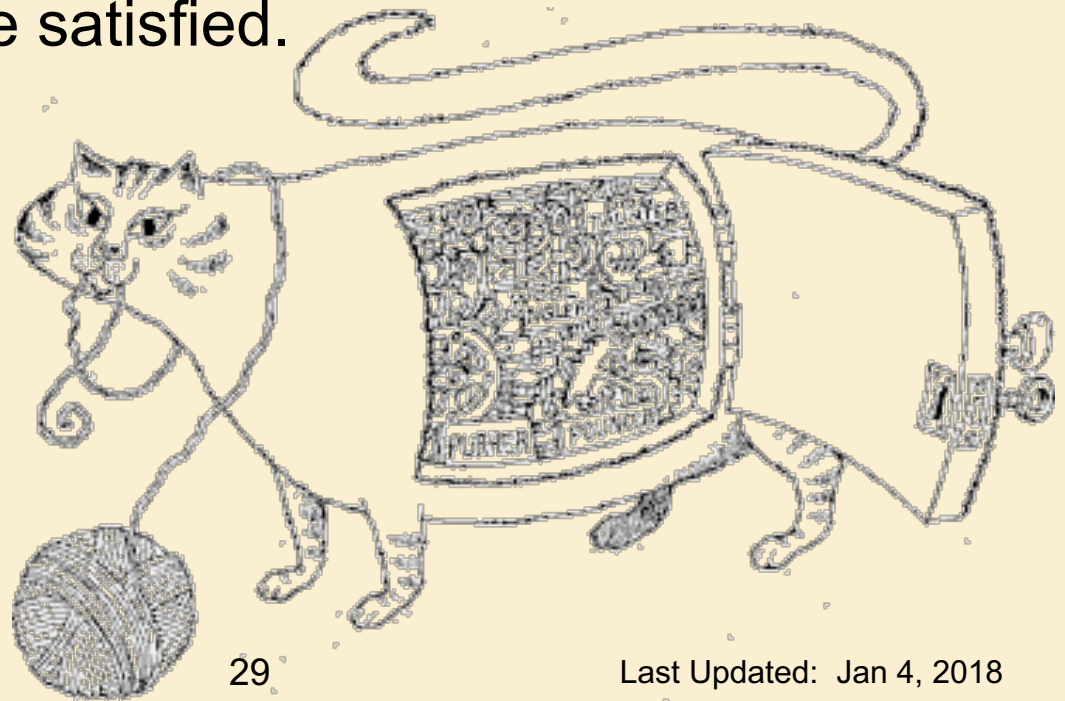

Abstraction

- *The psychological profiling of a programmer is mostly the ability to shift levels of abstraction, from low level to high level. To see something in the small and to see something in the large.*

– Donald Knuth




Wassily Kandinsky (Russian, 1866-1944)
Abstraction, 1922, Lithograph from the fourth Bauhaus portfolio

Abstract Data Types (ADTs)

- An ADT is a model of a data structure that specifies
 - The type of data stored
 - Operations supported on these data
- An ADT does **not** specify how the data are stored or how the operations are implemented.
- The abstraction of an ADT facilitates
 - **Design of complex systems.** Representing complex data structures by concise ADTs, facilitates reasoning about and designing large systems of many interacting data structures.
 - **Encapsulation/Modularity.** If I just want to use an object / data structure, all I need to know is its ADT (not its internal workings).

Hierarchical Design

- Hierarchical class definitions allows efficient re-use of software over different contexts.

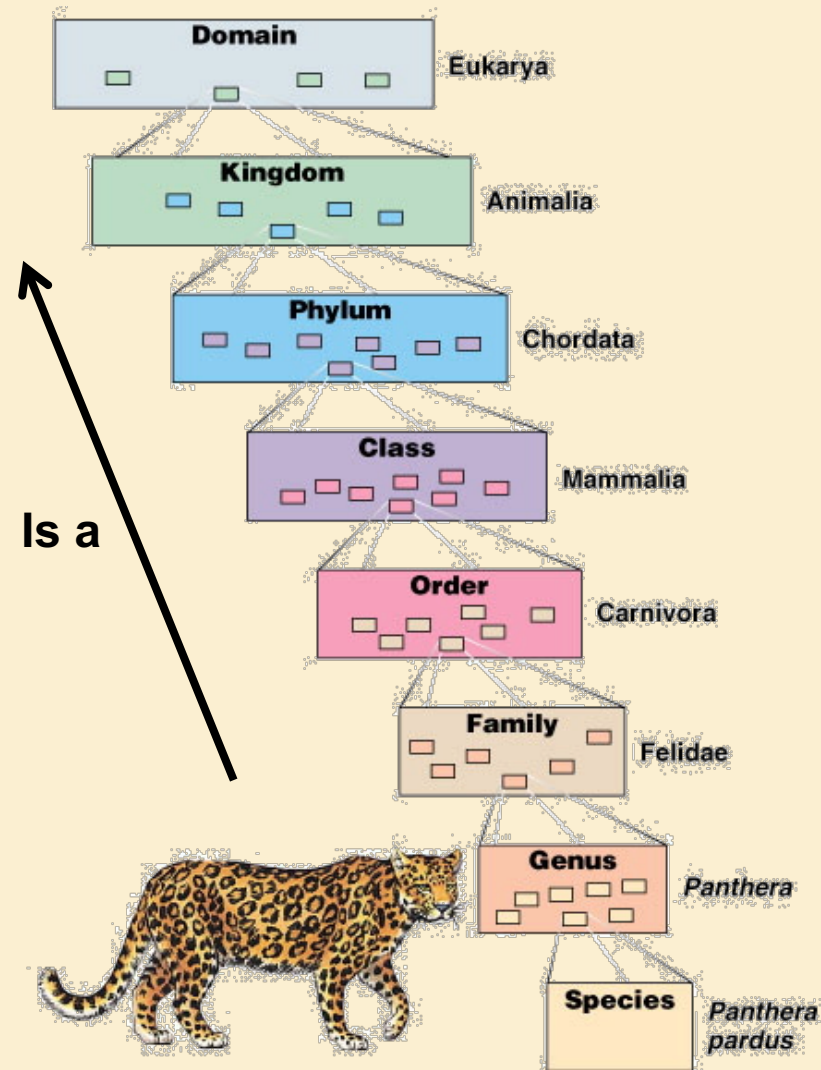

Copyright © Pearson Education, Inc., publishing as Benjamin Cummings.

Data Structures & Object-Oriented Design

- Definitions
- Principles of Object-Oriented Design
- **Hierarchical Design in Java**
- Abstract Data Types & Interfaces
- Casting
- Generics
- Pseudo-Code

Inheritance

- Object-oriented design provides for hierarchical classes through the concept of **inheritance**.
- A **subclass specializes** or **extends** a **superclass**.
- In so doing, the subclass **inherits** the variables and methods of the superclass.
- The subclass may **override** certain superclass methods, **specializing** them for its particular purpose.
- The subclass may also define additional variables and methods that **extend** the definition of the superclass.

Types of Method Overriding

- Generally, methods of a subclass **replace** superclass methods.
- An exception is **constructor** methods, which do not replace, but **refine** superclass constructor methods.
- Thus invocation of a constructor method starts with the highest-level class, and proceeds down the hierarchy to the subclass of the object being instantiated.
- This is either accomplished implicitly, or explicitly with the **super** keyword.

Refinement Overriding


```
public class Camera {  
    private String cameraMake;  
    private String cameraModel;  
  
    Camera(String mk, String mdl) { //constructor  
        cameraMake = mk;  
        cameraModel = mdl;  
    }  
  
    public String make() { return cameraMake; }  
    public String model() { return cameraModel; }  
}
```

```
public class DigitalCamera extends Camera{  
    private int numPix;  
  
    DigitalCamera(String mk, String mdl, int n) { //constructor  
        super(mk, mdl);  
        numPix = n;  
    }  
  
    public int numberOfPixels() { return numPix; }  
}
```

← refines

← extends

```
DigitalCamera myCam = new DigitalCamera("Nikon", "D90", 12000000);
```

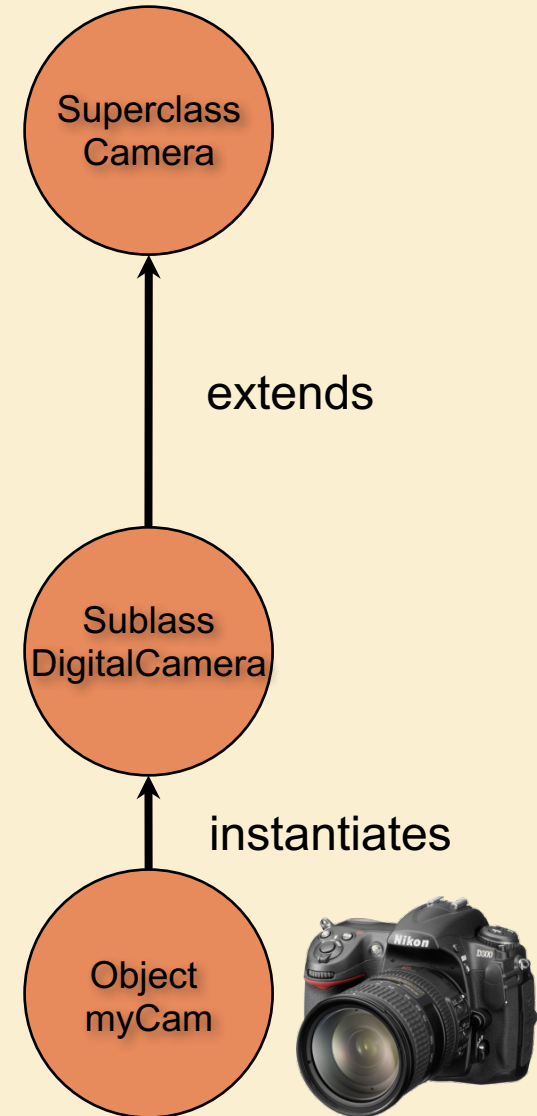

Last Updated: Jan 4, 2018

Refinement Overriding


```
public class Camera {  
    private String cameraMake;  
    private String cameraModel;  
  
    Camera(String mk, String mdl) { //constructor  
        cameraMake = mk;  
        cameraModel = mdl;  
    }  
  
    public String make() { return cameraMake; }  
    public String model() { return cameraModel; }  
}
```

```
public class DigitalCamera extends Camera{  
    private int numPix;  
  
    DigitalCamera(String mk, String mdl) { //constructor  
        super(mk, mdl);  
        numPix = 0;  
    }  
  
    public int numberOfPixels() { return numPix; }  
}
```

← refines

← extends

```
DigitalCamera myCam = new DigitalCamera("Nikon", "D90");
```

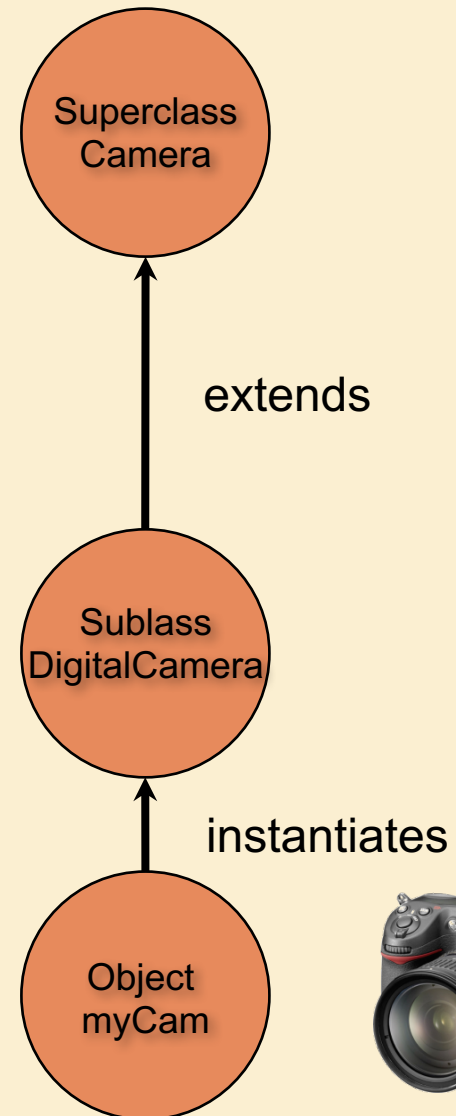

Last Updated: Jan 4, 2018

Refinement Overriding


```
public class Camera {  
    private String cameraMake;  
    private String cameraModel;  
  
    Camera() { //constructor  
        cameraMake = "Unknown make";  
        cameraModel = "Unknown model";  
    }  
  
    public String make() { return cameraMake; }  
    public String model() { return cameraModel; }  
}
```

```
public class DigitalCamera extends Camera{  
    private int numPix;  
  
    DigitalCamera() { //constructor  
        numPix = 0;  
    }  
  
    public int numberOfPixels() { return numPix; }  
}
```

← refines (implicit `super()` call)

← extends

```
DigitalCamera myCam = new DigitalCamera();
```

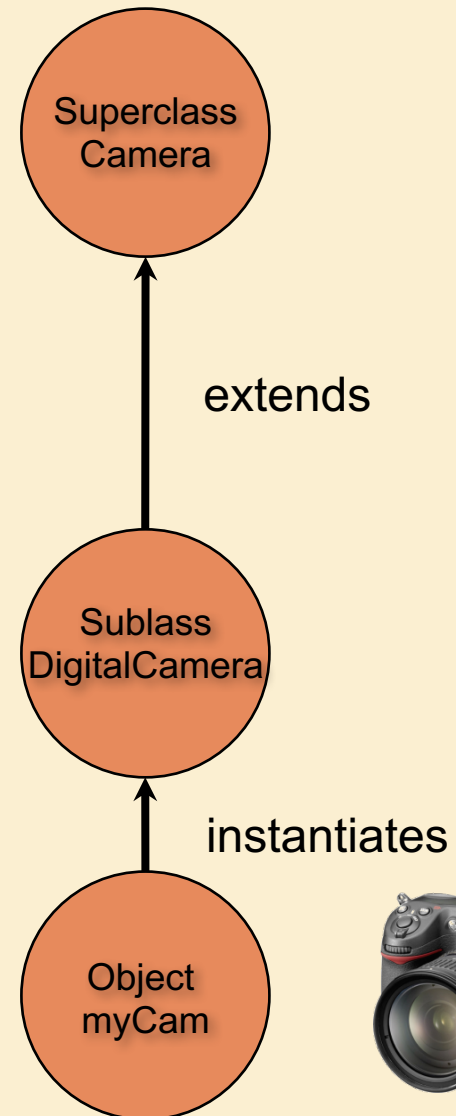


Last Updated: Jan 4, 2018

Replacement Overriding

```
public class DigitalCamera extends Camera{  
    private int numPix;  
  
    DigitalCamera(String mk, String mdl, int n) { //constructor  
        super(mk, mdl);  
        numPix = n;  
    }  
  
    public int numberOfPixels() { return numPix; }  
    public byte[][] getDigitalImage() { return takeDigitalPhoto(); }  
}
```

```
public class AutoDigitalCamera extends DigitalCamera{  
  
    AutoDigitalCamera(String mk, String mdl, int n) { //constructor  
        super(mk, mdl, n);  
    }  
  
    public byte[][] getDigitalImage() {  
        autoFocus();  
        return takeDigitalPhoto();  
    }  
}
```

```
DigitalCamera myCam = new AutoDigitalCamera("Nikon", "D90", 12000000);  
byte[][] myImage = myCam.getDigitalImage();
```

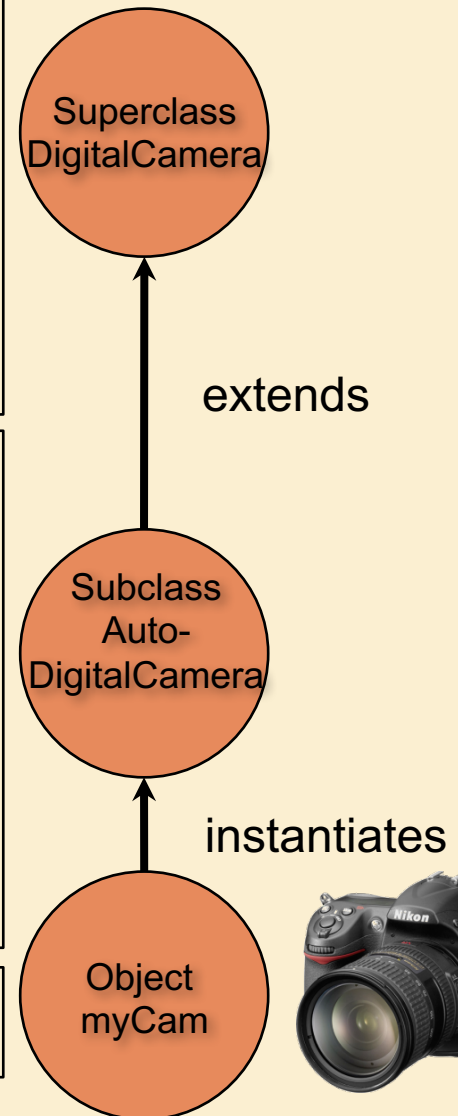

polymorphism

Polymorphism

- Polymorphism = “many forms”
- Polymorphism allows an object variable to take different forms, depending upon the specific class of the object it refers to.
- Suppose an object **o** is defined to be of class **S**.
- It is now valid to instantiate **o** as an object of any type **T** that extends **S**.
- Thus **o** can potentially refer to a broad variety of objects.

Data Structures & Object-Oriented Design

- Definitions
- Principles of Object-Oriented Design
- Hierarchical Design in Java
- **Abstract Data Types & Interfaces**
- Casting
- Generics
- Pseudo-Code

Abstract Data Type (ADT)

- A set of data values and associated operations that are precisely specified independent of any particular implementation.
- ADTs specify what each operation does, but not how it does it.
- ADTs simplify the design of algorithms.

Abstract Data Type (ADT)

- In Java, an ADT
 - can be expressed by an **interface**.
 - is implemented as a complete data structure by a **class**.
 - is instantiated as an **object**.

Application Programming Interfaces (APIs)


- The **interface** for an ADT specifies:
 - A type definition
 - A collection of methods for this type
 - Each method is specified by its **signature**, comprising
 - The name of the method
 - The number and type of the arguments for each method.

ADT Example

```
public interface Device {  
    public String make();  
    public String model();  
}
```

```
public class Camera implements Device {  
  
    private String cameraMake;  
    private String cameraModel;  
  
    Camera(String mk, String mdl) { //constructor  
        cameraMake = mk;  
        cameraModel = mdl;  
    }  
  
    public String make() { return cameraMake; }  
    public String model() { return cameraModel; }  
}
```

```
Camera myCam = new Camera("Nikon", "D90");
```

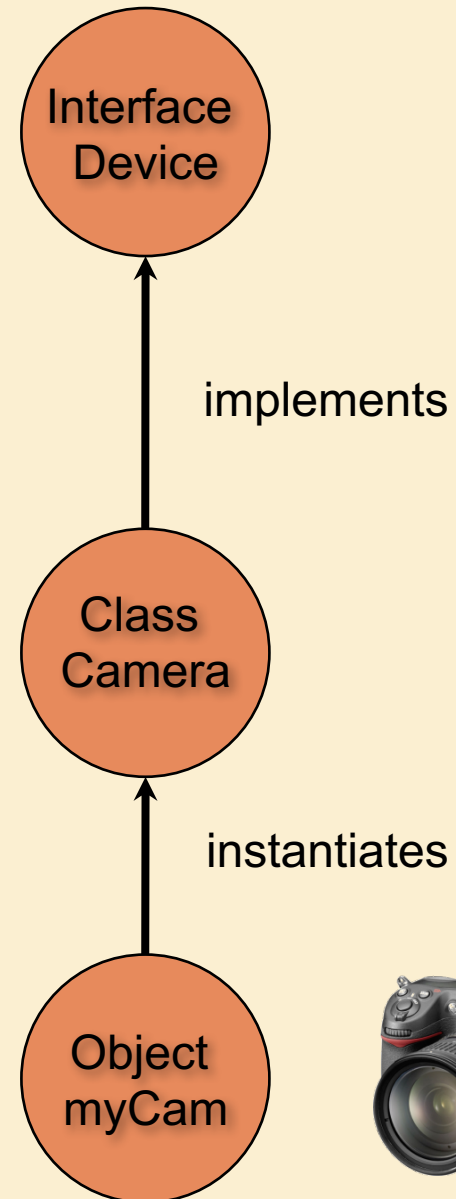

Last Updated: Jan 4, 2018

ADT Example


```
public interface Device {  
    public String make();  
    public String model();  
}
```

```
public class Camera implements Device {  
  
    private String cameraMake;  
    private String cameraModel;  
    private boolean singleLensReflex;  
  
    Camera(String mk, String mdl, boolean SLR) { //constructor  
        cameraMake = mk;  
        cameraModel = mdl;  
        singleLensReflex = SLR;  
    }  
  
    public String make() { return cameraMake; }  
    public String model() { return cameraModel; }  
    public boolean isSLR() { return singleLensReflex; }  
}
```

specializes




```
Camera myCam = new Camera("Nikon", "D90", true);
```

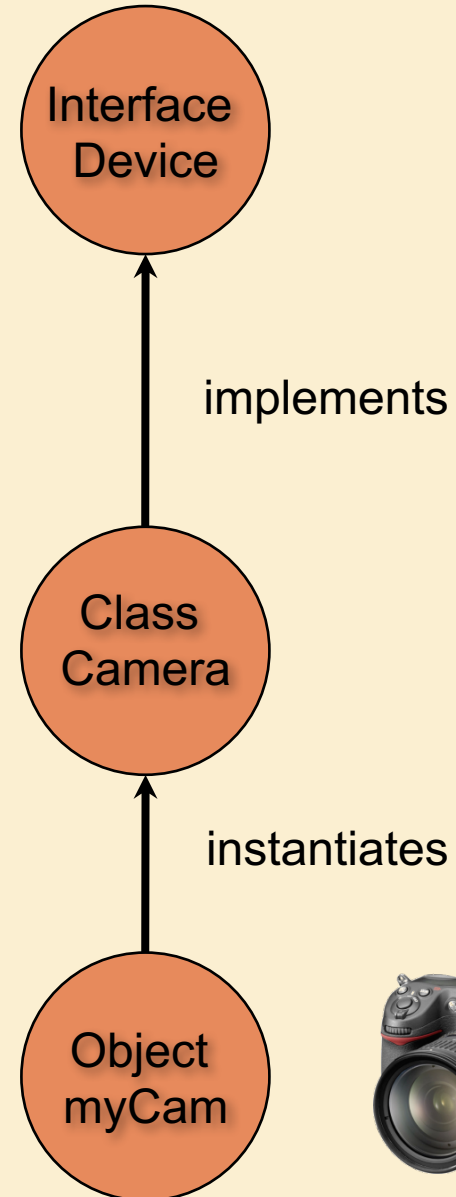

Last Updated: Jan 4, 2018


Multiple Inheritance

- In Java, a class can have at most one direct parent class.
- Thus classes must form trees.
- This avoids the ambiguity that would arise if two parents defined methods with the same signature.

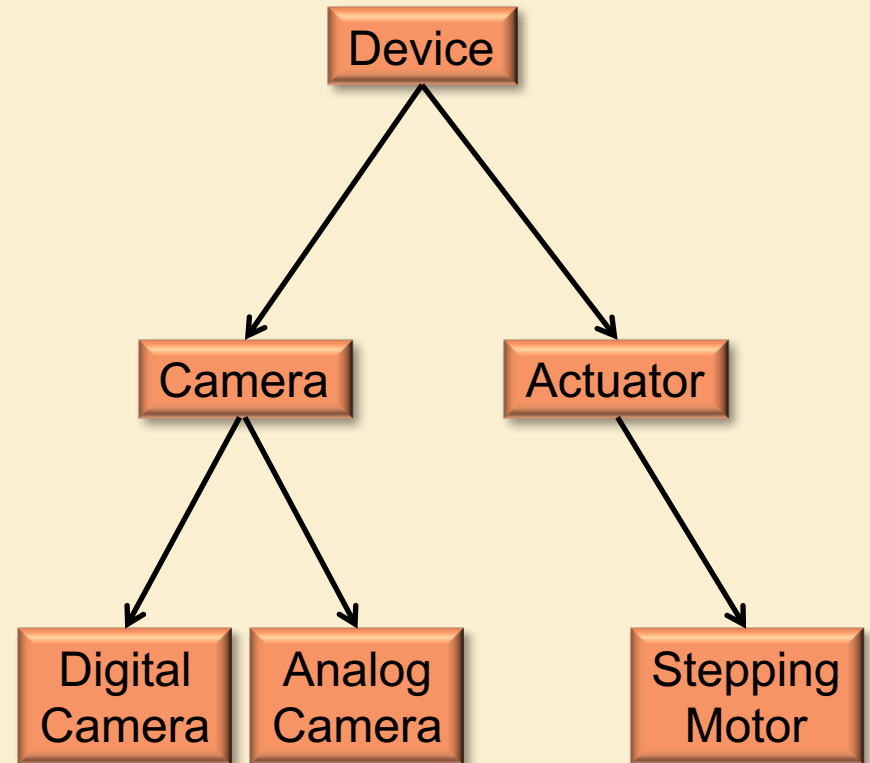

Multiple Inheritance

- However, classes and interfaces can have more than one direct parent **interface**.
- Thus interfaces do not necessarily form trees, but **directed acyclic graphs (DAGs)**.
- No ambiguity can arise, since methods with the same signature can be considered as one.
- This allows **mixin** of unrelated interfaces to form more complex ADTs.

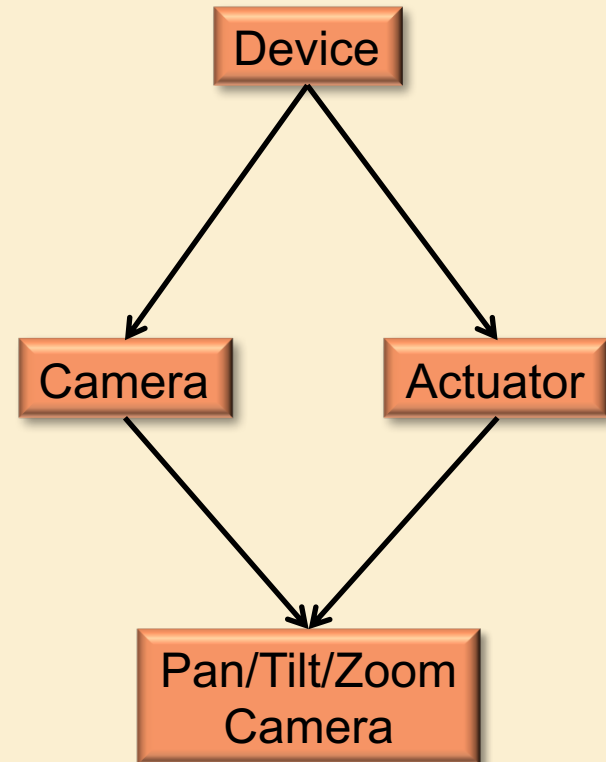

```
public interface PTZCamera extends Camera, Actuator {  
    ...  
}
```


Data Structures & Object-Oriented Design

- Definitions
- Principles of Object-Oriented Design
- Hierarchical Design in Java
- Abstract Data Types & Interfaces
- **Casting**
- Generics
- Pseudo-Code

Primitive Conversions

Primitive conversions:

Widening (implicit cast):

```
double x;  
int y = 1;  
x = y;
```

Narrowing (explicit cast):

```
double x = 1;  
int y;  
y = (int) x;
```

Object Conversions

- Casting an object may involve either a **widening** or a **narrowing** type conversion.
- A **widening conversion** occurs when a type T is converted into a 'wider' type U.
 - Example: U is a superclass of T.
 - Widening conversions are performed automatically.
- A **narrowing conversion** occurs when a type T is converted into a 'narrower' type U.
 - Example: U is a subclass of T.
 - Narrowing conversions require an explicit cast.

Casting Examples

```
DigitalCamera myCam1 = new DigitalCamera("Nikon","D90");  
DigitalCamera myCam2 = new AutoDigitalCamera("Olympus","E30",12000000);  
AutoDigitalCamera myCam3 = new AutoDigitalCamera("Sony","A550",14000000);
```

```
myCam1 = myCam3; // ?  
myCam3 = myCam1; // ?  
myCam3 = myCam2; // ?  
myCam3 = (AutoDigitalCamera) myCam1; // ?  
myCam3 = (AutoDigitalCamera) myCam2; // ?
```

Casting Examples

```
DigitalCamera myCam1 = new DigitalCamera("Nikon","D90");  
DigitalCamera myCam2 = new AutoDigitalCamera("Olympus","E30",12000000);  
AutoDigitalCamera myCam3 = new AutoDigitalCamera("Sony","A550",14000000);  
  
myCam1 = myCam3; //widening  
myCam3 = myCam1; //narrowing - compiler error  
myCam3 = myCam2; //narrowing - compiler error  
myCam3 = (AutoDigitalCamera) myCam1; //narrowing— generates ClassCastException  
myCam3 = (AutoDigitalCamera) myCam2; // narrowing - valid
```

Data Structures & Object-Oriented Design

- Definitions
- Principles of Object-Oriented Design
- Hierarchical Design in Java
- Abstract Data Types & Interfaces
- Casting
- **Generics**
- Pseudo-Code

Generics

- A **generic type** is a type that is not defined at compilation time.
- A generic type becomes fully defined only **when instantiated as a variable**.
- This allows us to define a class in terms of a set of **formal type parameters**, that can be used to abstract certain variables.
- Only when instantiating the object, do we specify the **actual type parameters** to be used.

Generics Example

```
/** Creates a coupling between two objects */  
public class Couple<A, B> {  
    A obj1;  
    B obj2;  
  
    public void set(A o1, B o2) {  
        obj1 = o1;  
        obj2 = o2;  
    }  
}
```

```
Camera myCam1 = new DigitalCamera("Nikon","D90",12000000);  
Camera myCam2 = new AutoDigitalCamera("Olympus","E30",12000000);  
  
Couple<Camera, Camera> stereoCamera = new Couple<>();  
  
stereoCamera.set(myCam1, myCam2);
```



[Copyright](#)

Generics Example

```
Couple<Camera, Camera> stereoCamera = new Couple<>();
```

- Note that two things are happening here:
 1. The variable stereoCamera is being defined of type Couple<Camera, Camera>
 2. An object of type Couple<Camera, Camera> is created and stereoCamera is updated to refer to that object.



Inheritance with Generics

```
Couple<Camera, Camera> stereoCamera = new Couple<>();
```

- Generic classes can serve as superclasses or subclasses of other generic and non-generic classes.
- Thus, for example, if a class **CloselyCouple<T, T>** is defined to extend Couple<T, T>, then it would be valid to instantiate stereoCamera as:

```
Couple<Camera, Camera> stereoCamera = new CloselyCouple<>();
```



But be careful...

- DigitalCamera is a subclass of Camera.
- This does **NOT** mean that Couple<DigitalCamera, DigitalCamera> is a subclass of Couple<Camera, Camera>.



Data Structures & Object-Oriented Design

- Definitions
- Principles of Object-Oriented Design
- Hierarchical Design in Java
- Abstract Data Types & Interfaces
- Casting
- Generics
- **Pseudo-Code**

Pseudocode

- High-level description of an algorithm
- More structured than English prose
- Less detailed than a program
- Preferred notation for describing algorithms
- Hides program design issues

Example: find max element of an array

```
Algorithm arrayMax(A, n)  
Input array A of n integers  
Output maximum element of A  
  
currentMax  $\leftarrow$  A[0]  
for i  $\leftarrow$  1 to n - 1 do  
    if A[i] > currentMax then  
        currentMax  $\leftarrow$  A[i]  
return currentMax
```

Pseudocode Details

- Control flow
 - **if ... then ... [else ...]**
 - **while ... do ...**
 - **repeat ... until ...**
 - **for ... do ...**
 - Indentation replaces braces
- Method declaration

Algorithm *method* (*arg* [, *arg*...])

Input ...

Output ...
- Method call

var.method (*arg* [, *arg*...])
- Return value

return *expression*
- Expressions
 - ← Assignment
(like = in Java)
 - = Equality testing
(like == in Java)
 - n*² Superscripts and other mathematical formatting allowed

Data Structures & Object-Oriented Design

- Definitions
- Principles of Object-Oriented Design
- Hierarchical Design in Java
- Abstract Data Types & Interfaces
- Casting
- Generics
- Pseudo-Code