

Observer Design Pattern

Event-Driven Design



EECS3311: Software Design
Fall 2017


CHEN-WEI WANG

Motivating Problem



- A *weather station* maintains *weather data* such as *temperature*, *humidity*, and *pressure*.
- Various kinds of applications on these *weather data* should regularly update their *displays*:
 - *Condition*: *temperature* in celsius and *humidity* in percentages.
 - *Forecast*: if expecting for rainy weather due to reduced *pressure*.
 - *Statistics*: minimum/maximum/average measures of *temperature*.

First Design: Weather Station

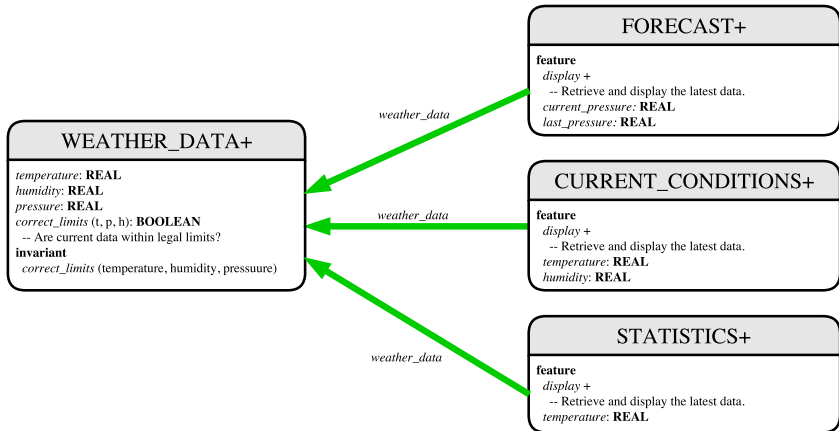

Whenever the `display` feature is called, **retrieve** the current values of temperature, humidity, and/or pressure via the `weather_data` reference.

Implementing the First Design (1)

```
class WEATHER_DATA create make
feature -- Data
  temperature: REAL
  humidity: REAL
  pressure: REAL
feature -- Queries
  correct_limits(t,p,h: REAL): BOOLEAN
  ensure
    Result implies -36 <= t and t <= 60
    Result implies 50 <= p and p <= 110
    Result implies 0.8 <= h and h <= 100
feature -- Commands
  make (t, p, h: REAL)
  require
    correct_limits(temperature, pressure, humidity)
  ensure
    temperature = t and pressure = p and humidity = h
invariant
  correct_limits(temperature, pressure, humidity)
end
```

Implementing the First Design (2.1)

```
class CURRENT_CONDITIONS create make
feature -- Attributes
  temperature: REAL
  humidity: REAL
  weather_data: WEATHER_DATA
feature -- Commands
  make(wd: WEATHER_DATA)
    ensure weather_data = wd
  update
    do temperature := weather_data.temperature
       humidity := weather_data.humidity
    end
  display
    do update
       io.put_string("Current Conditions: ")
       io.put_real (temperature) ; io.put_string (" degrees C and ")
       io.put_real (humidity) ; io.put_string (" percent humidity%N")
    end
end
```

Implementing the First Design (2.2)

```
class FORECAST create make
feature -- Attributes
  current_pressure: REAL
  last_pressure: REAL
  weather_data: WEATHER_DATA
feature -- Commands
  make(wd: WEATHER_DATA) ensure weather_data = a-weather_data
  update
  do last_pressure := current_pressure
     current_pressure := weather_data.pressure
  end
  display
  do update
     if current_pressure > last_pressure then
       print("Improving weather on the way!%N")
     elseif current_pressure = last_pressure then
       print("More of the same%N")
     else print("Watch out for cooler, rainy weather%N") end
  end
end
```

Implementing the First Design (2.3)

```
class STATISTICS create make
feature -- Attributes
  weather_data: WEATHER_DATA
  current_temp: REAL
  max, min, sum_so_far: REAL
  num_readings: INTEGER
feature -- Commands
  make(wd: WEATHER_DATA)
    ensure weather_data = a_weather_data
  update
    do current_temp := weather_data.temperature
      -- Update min, max if necessary.
    end
  display
    do update
      print("Avg/Max/Min temperature = ")
      print(sum_so_far / num_readings + "/" + max + "/" min + "%N")
    end
end
```

Implementing the First Design (3)


```
1 class WEATHER_STATION create make
2 feature -- Attributes
3   cc: CURRENT_CONDITIONS ; fd: FORECAST ; sd: STATISTICS
4   wd: WEATHER_DATA
5 feature -- Commands
6   make
7     do create wd.make (9, 75, 25)
8     create cc.make (wd) ; create fd.make (wd) ; create sd.make(wd)
9
10    wd.set_measurements (15, 60, 30.4)
11    cc.display ; fd.display ; sd.display
12
13    cc.display ; fd.display ; sd.display
14
15    wd.set_measurements (11, 90, 20)
16    cc.display ; fd.display ; sd.display
17 end
18 end
```

L14: Updates occur on cc, fd, sd even with the same data.

First Design: Good Design?


- Each application (CURRENT_CONDITION, FORECAST, STATISTICS) *cannot know* when the weather data change.
 - ⇒ All applications have to periodically initiate updates in order to keep the `display` results up to date.
 - ∴ Each inquiry of current weather data values is *a remote call*.
 - ∴ Waste of computing resources (e.g., network bandwidth) when there are actually no changes on the weather data.
- To avoid such overhead, it is better to let:
 - Each application *subscribe* the weather data.
 - The weather station *publish/notify* new changes.
 - ⇒ Updates on the application side occur only *when necessary*.

Observer Pattern: Architecture

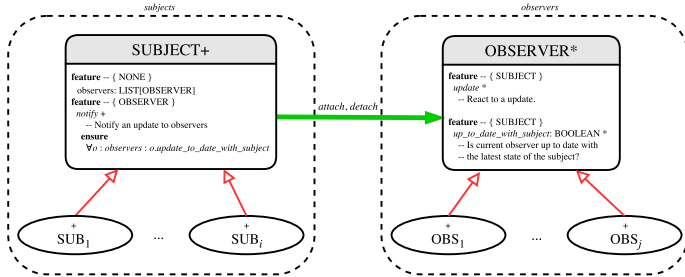

- Observer (publish-subscribe) pattern: **one-to-many** relation.
 - Observers (*subscribers*) are attached to a subject (*publisher*).
 - The subject notify its attached observers about changes.
- Some interchangeable vocabulary:
 - subscribe \approx attach \approx register
 - unsubscribe \approx detach \approx unregister
 - publish \approx notify
 - handle \approx update

Observer Pattern: Weather Station

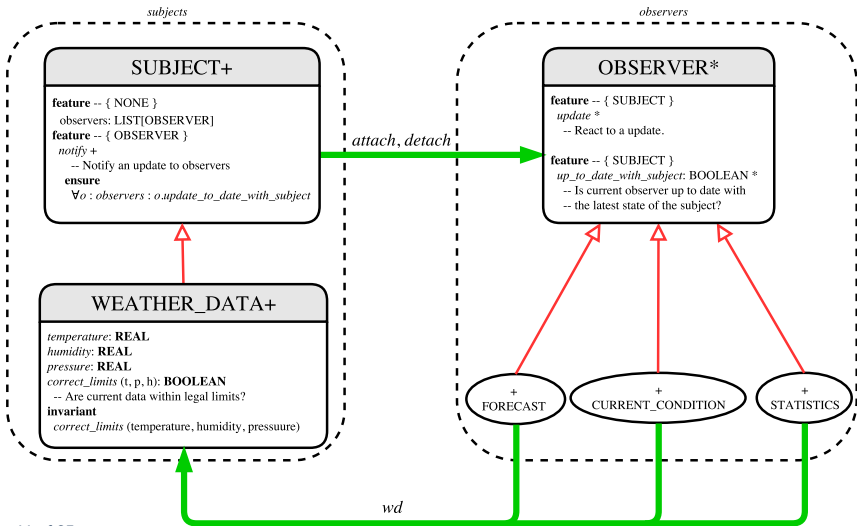

Implementing the Observer Pattern (1.1)

```
deferred class
  OBSERVER
  feature -- To be effected by a descendant
    up_to_date_with_subject: BOOLEAN
      -- Is this observer up to date with its subject?
      deferred
      end

  update
    -- Update the observer's view of 's'
    deferred
    ensure
      up_to_date_with_subject: up_to_date_with_subject
    end
  end
end
```

Each effective descendant class of `OBSERVER` should:

- Define what weather data are required to be up-to-date.
- Define how to update the required weather data.

Implementing the Observer Pattern (1.2)

```
class CURRENT_CONDITIONS
inherit OBSERVER
feature -- Commands
  make(a_weather_data: WEATHER_DATA)
  do weather_data := a_weather_data
    weather_data.attach (Current)
  ensure weather_data = a_weather_data
    weather_data.observers.has (Current)
  end
feature -- Queries
up_to_date_with_subject: BOOLEAN
  ensure then Result = temperature = weather_data.temperature and
    humidity = weather_data.humidity

update
  do -- Same as 1st design; Called only on demand
  end
display
  do -- No need to update; Display contents same as in 1st design
  end
end
```

Implementing the Observer Pattern (1.3)

```
class FORECAST
inherit OBSERVER
feature -- Commands
  make(a_weather_data: WEATHER_DATA)
  do weather_data := a_weather_data
    weather_data.attach (Current)
  ensure weather_data = a_weather_data
    weather_data.observers.has (Current)
  end
feature -- Queries
up_to_date_with_subject: BOOLEAN
  ensure then
    Result = current_pressure = weather_data.pressure
  update
  do -- Same as 1st design; Called only on demand
  end
display
  do -- No need to update; Display contents same as in 1st design
  end
end
```

Implementing the Observer Pattern (1.4)

```
class STATISTICS
inherit OBSERVER
feature -- Commands
  make(a_weather_data: WEATHER_DATA)
  do weather_data := a_weather_data
    weather_data.attach (Current)
  ensure weather_data = a_weather_data
    weather_data.observers.has (Current)
  end
feature -- Queries
up_to_date_with_subject: BOOLEAN
  ensure then
    Result = current_temperature = weather_data.temperature
  update
  do -- Same as 1st design; Called only on demand
  end
display
  do -- No need to update; Display contents same as in 1st design
  end
end
```

Implementing the Observer Pattern (2.1)

```
class SUBJECT create make
feature -- Attributes
  observers : LIST[OBSERVER]
feature -- Commands
  make
    do create {LINKED_LIST[OBSERVER]} observers.make
    ensure no_observers: observers.count = 0 end
feature -- Invoked by an OBSERVER
  attach (o: OBSERVER) -- Add 'o' to the observers
    require not_yet_attached: not observers.has (o)
    ensure is_attached: observers.has (o) end
  detach (o: OBSERVER) -- Add 'o' to the observers
    require currently_attached: observers.has (o)
    ensure is_attached: not observers.has (o) end
feature -- invoked by a SUBJECT
  notify -- Notify each attached observer about the update.
    do across observers as cursor loop cursor.item.update end
    ensure all_views_updated:
      across observers as o all o.item.up_to_date_with_subject end
    end
end
```


Implementing the Observer Pattern (2.2)

```
class WEATHER_DATA
inherit SUBJECT rename make as make_subject end
create make
feature -- data available to observers
  temperature: REAL
  humidity: REAL
  pressure: REAL
  correct_limits(t,p,h: REAL): BOOLEAN
feature -- Initialization
  make (t, p, h: REAL)
  do
    make_subject -- initialize empty observers
    set_measurements (t, p, h)
  end
feature -- Called by weather station
  set_measurements(t, p, h: REAL)
  require correct_limits(t,p,h)
invariant
  correct_limits(temperature, pressure, humidity)
end
```

Implementing the Observer Pattern (3)

```
1 class WEATHER_STATION create make
2 feature -- Attributes
3   cc: CURRENT_CONDITIONS ; fd: FORECAST ; sd: STATISTICS
4   wd: WEATHER_DATA
5 feature -- Commands
6   make
7     do create wd.make (9, 75, 25)
8       create cc.make (wd) ; create fd.make (wd) ; create sd.make(wd)
9
10    wd.set_measurements (15, 60, 30.4)
11    wd.notify
12
13    cc.display ; fd.display ; sd.display
14
15    wd.set_measurements (11, 90, 20)
16    wd.notify
17 end
18 end
```


L13: cc, fd, sd make use of “cached” data values.

Observer Pattern: Limitation? (1)

- The *observer design pattern* is a reasonable solution to building a *one-to-many* relationship: one subject (publisher) and multiple observers (subscribers).
- But what if a *many-to-many* relationship is required for the application under development?
 - *Multiple weather data* are maintained by weather stations.
 - Each application observes *all* these *weather data*.
 - But, each application still stores the *latest* measure only. e.g., the statistics app stores one copy of `temperature`
 - Whenever some weather station updates the `temperature` of its associated *weather data*, all relevant subscribed applications (i.e., current conditions, statistics) should update their temperatures.
- How can the observer pattern solve this general problem?
 - Each *weather data* maintains a list of subscribed *applications*.
 - Each *application* is subscribed to *multiple weather data*.

Observer Pattern: Limitation? (2)


What happens at runtime when building a *many-to-many* relationship using the *observer pattern*?

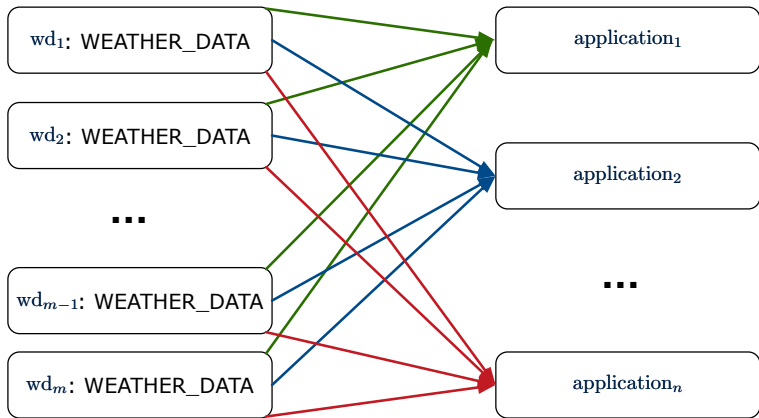

Graph complexity, with m subjects and n observers? [$O(m \cdot n)$]

Event-Driven Design (1)

Here is what happens at runtime when building a **many-to-many** relationship using the *event-driven design*.

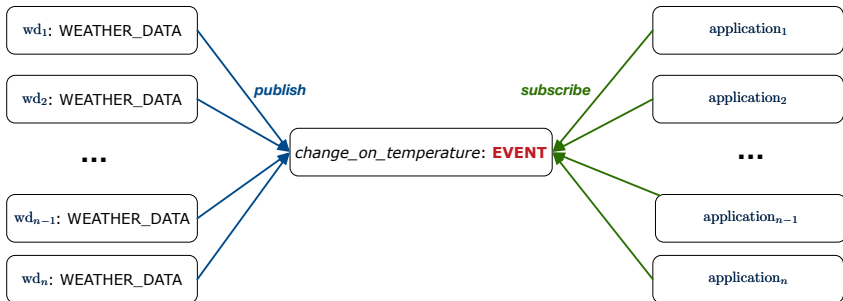

Graph complexity, with m subjects and n observers? $[O(m + n)]$

Additional cost by adding a new subject? $[O(1)]$

Additional cost by adding a new observer? $[O(1)]$

Additional cost by adding a new event type? $[O(m + n)]$

Event-Driven Design (2)

In an *event-driven design*:

- Each variable being observed (e.g., temperature, humidity, pressure) is called a *monitored variable*.
e.g., A nuclear power plant (i.e., the *subject*) has its temperature and pressure being *monitored* by a shutdown system (i.e., an *observer*): as soon as values of these *monitored variables* exceed the normal threshold, the SDS will be notified and react by shutting down the plant.
- Each *monitored variable* is declared as an *event*:
 - An *observer* is *attached/subscribed* to the relevant events.
 - CURRENT_CONDITION attached to events for temperature, humidity.
 - FORECAST only subscribed to the event for pressure.
 - STATISTICS only subscribed to the event for temperature.
 - A *subject notifies/publishes* changes to the relevant events.

Event-Driven Design: Implementation

- Requirements for implementing an *event-driven design* are:
 1. When an *observer* object is *subscribed to* an *event*, it attaches:
 - 1.1 The **reference/pointer** to an update operation
Such reference/pointer is used for delayed executions.
 - 1.2 Itself (i.e., the **context object** for invoking the update operation)
 2. For the *subject* object to *publish* an update to the *event*, it:
 - 2.1 Iterates through all its observers (or listeners)
 - 2.2 Uses the operation reference/pointer (attached earlier) to update the corresponding observer.
- Both requirements can be satisfied by Eiffel and Java.
- We will compare how an *event-driven design* for the weather station problems is implemented in Eiffel and Java.
 - ⇒ It's much more convenient to do such design in Eiffel.

Event-Driven Design in Java (1)

```
1 public class Event {
2     Hashtable<Object, MethodHandle> listenersActions;
3     Event() { listenersActions = new Hashtable<>(); }
4     void subscribe(Object listener, MethodHandle action) {
5         listenersActions.put(listener, action);
6     }
7     void publish(Object arg) {
8         for (Object listener : listenersActions.keySet()) {
9             MethodHandle action = listenersActions.get(listener);
10            try {
11                action.invokeWithArguments(listener, arg);
12            } catch (Throwable e) { }
13        }
14    }
15 }
```

- **L5:** Both the delayed `action` reference and its context object (or call target) `listener` are stored into the table.
- **L11:** An invocation is made from retrieved `listener` and `action`.

Event-Driven Design in Java (2)

```
1 public class WeatherData {
2     private double temperature;
3     private double pressure;
4     private double humidity;
5     public WeatherData(double t, double p, double h) {
6         setMeasurements(t, h, p);
7     }
8     public static Event changeOnTemperature = new Event();
9     public static Event changeOnHumidity = new Event();
10    public static Event changeOnPressure = new Event();
11    public void setMeasurements(double t, double h, double p) {
12        temperature = t;
13        humidity = h;
14        pressure = p;
15        changeOnTemperature.publish(temperature);
16        changeOnHumidity.publish(humidity);
17        changeOnPressure.publish(pressure);
18    }
19 }
```

Event-Driven Design in Java (3)

```
1 public class CurrentConditions {
2     private double temperature; private double humidity;
3     public void updateTemperature(double t) { temperature = t; }
4     public void updateHumidity(double h) { humidity = h; }
5     public CurrentConditions() {
6         MethodHandles.Lookup lookup = MethodHandles.lookup();
7         try {
8             MethodHandle ut = lookup.findVirtual(
9                 this.getClass(), "updateTemperature",
10                MethodType.methodType(void.class, double.class));
11                WeatherData.changeOnTemperature.subscribe(this, ut);
12                MethodHandle uh = lookup.findVirtual(
13                    this.getClass(), "updateHumidity",
14                    MethodType.methodType(void.class, double.class));
15                WeatherData.changeOnHumidity.subscribe(this, uh);
16            } catch (Exception e) { e.printStackTrace(); }
17        }
18        public void display() {
19            System.out.println("Temperature: " + temperature);
20            System.out.println("Humidity: " + humidity); } }
```

Event-Driven Design in Java (4)

```
1 public class WeatherStation {
2     public static void main(String[] args) {
3         WeatherData wd = new WeatherData(9, 75, 25);
4         CurrentConditions cc = new CurrentConditions();
5         System.out.println("=====");
6         wd.setMeasurements(15, 60, 30.4);
7         cc.display();
8         System.out.println("=====");
9         wd.setMeasurements(11, 90, 20);
10        cc.display();
11    } }
```

L4 invokes

```
WeatherData.changeOnTemperature.subscribe(
    cc, ``updateTemperature handle``)
```

L6 invokes

```
WeatherData.changeOnTemperature.publish(15)
```

which in turn invokes

```
``updateTemperature handle``.invokeWithArguments(cc, 15)
```

Event-Driven Design in Eiffel (1)

```
1 class EVENT [ARGUMENTS -> TUPLE ]
2 create make
3 feature -- Initialization
4   actions: LINKED_LIST[PROCEDURE[ARGUMENTS]]
5   make do create actions.make end
6 feature
7   subscribe (an_action: PROCEDURE[ARGUMENTS])
8     require action_not_already_subscribed: not actions.has(an_action)
9     do actions.extend (an_action)
10    ensure action_subscribed: action.has(an_action) end
11  publish (args: G)
12    do from actions.start until actions.after
13      loop actions.item.call (args) ; actions.forth end
14    end
15 end
```

- **L1** constrains the generic parameter ARGUMENTS: any class that instantiates ARGUMENTS must be a *descendant* of TUPLE.
- **L4**: The type *PROCEDURE* encapsulates both the context object and the reference/pointer to some update operation.

Event-Driven Design in Eiffel (2)

```
1 class WEATHER_DATA
2 create make
3 feature -- Measurements
4   temperature: REAL ; humidity: REAL ; pressure: REAL
5   correct_limits(t,p,h: REAL): BOOLEAN do ... end
6   make (t, p, h: REAL) do ... end
7 feature -- Event for data changes
8   change_on_temperature : EVENT[TUPLE[REAL]] once create Result end
9   change_on_humidity : EVENT[TUPLE[REAL]] once create Result end
10  change_on_pressure : EVENT[TUPLE[REAL]] once create Result end
11 feature -- Command
12   set_measurements(t, p, h: REAL)
13   require correct_limits(t,p,h)
14   do temperature := t ; pressure := p ; humidity := h
15     change_on_temperature .publish ([t])
16     change_on_humidity .publish ([p])
17     change_on_pressure .publish ([h])
18   end
19 invariant correct_limits(temperature, pressure, humidity) end
```

Event-Driven Design in Eiffel (3)

```

1  class CURRENT_CONDITIONS
2  create make
3  feature -- Initialization
4    make(wd: WEATHER_DATA)
5      do
6        wd.change_on_temperature.subscribe (agent update_temperature)
7        wd.change_on_temperature.subscribe (agent update_humidity)
8      end
9  feature
10   temperature: REAL
11   humidity: REAL
12   update_temperature (t: REAL) do temperature := t end
13   update_humidity (h: REAL) do humidity := h end
14   display do ... end
15 end

```

- `agent cmd` retrieves the pointer to `cmd` and its context object.
- **L6** \approx `... (agent Current.update_temperature)`
- Contrast **L6** with **L8–11** in Java class `CurrentConditions`.

Event-Driven Design in Eiffel (4)

```
1 class WEATHER_STATION create make
2 feature
3   cc: CURRENT_CONDITIONS
4   make
5     do create wd.make (9, 75, 25)
6       create cc.make (wd)
7       wd.set_measurements (15, 60, 30.4)
8       cc.display
9       wd.set_measurements (11, 90, 20)
10      cc.display
11   end
12 end
```

L6 invokes

```
wd.change_on_temperature.subscribe(  
    agent cc.update_temperature)
```

L7 invokes

```
wd.change_on_temperature.publish([15])
```

which in turn invokes `cc.update_temperature(15)`

Event-Driven Design: Eiffel vs. Java

- **Storing observers/listeners of an event**

- Java, in the Event class:

```
Hashtable<Object, MethodHandle> listenersActions;
```

- Eiffel, in the EVENT class:

```
actions: LINKED_LIST[PROCEDURE[ARGUMENTS]]
```

- **Creating and passing function pointers**

- Java, in the CurrentConditions class constructor:

```
MethodHandle ut = lookup.findVirtual(  
    this.getClass(), "updateTemperature",  
    MethodType.methodType(void.class, double.class));  
WeatherData.changeOnTemperature.subscribe(this, ut);
```

- Eiffel, in the CURRENT_CONDITIONS class construction:

```
wd.change_on_temperature.subscribe (agent update_temperature)
```

⇒ Eiffel's type system has been better thought-out for **design**.

Index (1)

Motivating Problem

First Design: Weather Station

Implementing the First Design (1)

Implementing the First Design (2.1)

Implementing the First Design (2.2)

Implementing the First Design (2.3)

Implementing the First Design (3)

First Design: Good Design?

Observer Pattern: Architecture

Observer Pattern: Weather Station

Implementing the Observer Pattern (1.1)

Implementing the Observer Pattern (1.2)

Implementing the Observer Pattern (1.3)

Implementing the Observer Pattern (1.4)

Index (2)

Implementing the Observer Pattern (2.1)

Implementing the Observer Pattern (2.2)

Implementing the Observer Pattern (3)

Observer Pattern: Limitation? (1)

Observer Pattern: Limitation? (2)

Event-Driven Design (1)

Event-Driven Design (2)

Event-Driven Design: Implementation

Event-Driven Design in Java (1)

Event-Driven Design in Java (2)

Event-Driven Design in Java (3)

Event-Driven Design in Java (4)

Event-Driven Design in Eiffel (1)

Event-Driven Design in Eiffel (2)

Index (3)

Event-Driven Design in Eiffel (3)

Event-Driven Design in Eiffel (4)

Event-Driven Design: Eiffel vs. Java