


Wednesday Sep. 5

Lecture I

# The Observe-Model-Execute Process

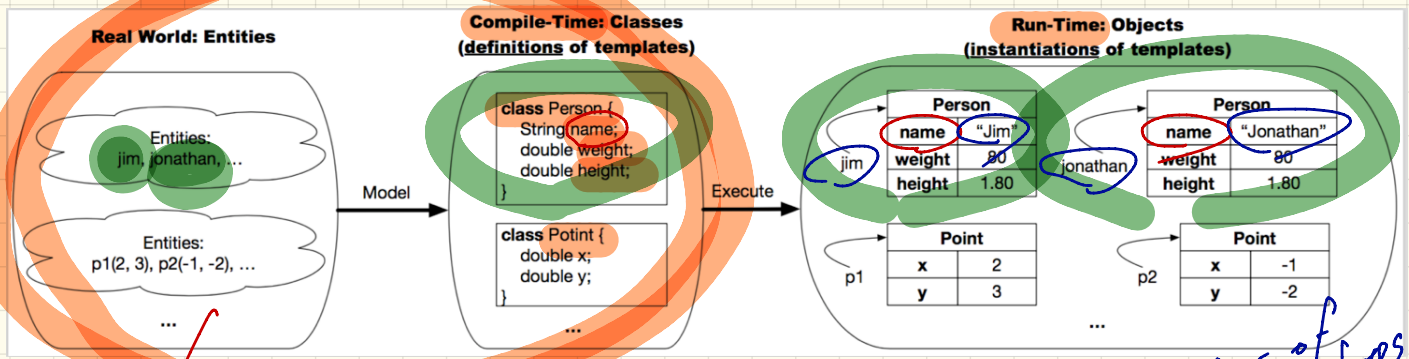

critical names → class attributes  
 vars. → method →

accessor → return some info.  
 mutator → change the values of attributes of some object  
 constructor → construct a new object

Context object

Person jim = new Person();

—

—

~~0000~~  
jim

0000

Person	
age	0
weight	0.0
height	0.0

— jim

Person	
age	0
w.	0.0
h.	0.0