

Inheritance



EECS2030 B: Advanced
Object Oriented Programming
Fall 2018

CHEN-WEI WANG

Why Inheritance: A Motivating Example

Problem: A *student management system* stores data about students. There are two kinds of university students: *resident* students and *non-resident* students. Both kinds of students have a *name* and a list of *registered courses*. Both kinds of students are restricted to *register* for no more than 10 courses. When *calculating the tuition* for a student, a base amount is first determined from the list of courses they are currently registered (each course has an associated fee). For a non-resident student, there is a *discount rate* applied to the base amount to waive the fee for on-campus accommodation. For a resident student, there is a *premium rate* applied to the base amount to account for the fee for on-campus accommodation and meals.

Tasks: Write Java classes that satisfy the above problem statement. At runtime, each type of student must be able to register a course and calculate their tuition fee.

No Inheritance: ResidentStudent Class

```
class ResidentStudent {
    String name;
    Course[] registeredCourses;
    int numberOfCourses;
    double premiumRate; /* there's a mutator method for this */
    ResidentStudent (String name) {
        this.name = name;
        registeredCourses = new Course[10];
    }
    void register(Course c) {
        registeredCourses[numberOfCourses] = c;
        numberOfCourses ++;
    }
    double getTuition() {
        double tuition = 0;
        for(int i = 0; i < numberOfCourses; i ++ ) {
            tuition += registeredCourses[i].fee;
        }
        return tuition * premiumRate ;
    }
}
```

No Inheritance: NonResidentStudent Class

```
class NonResidentStudent {
    String name;
    Course[] registeredCourses;
    int numberOfCourses;
    double discountRate; /* there's a mutator method for this */
    NonResidentStudent (String name) {
        this.name = name;
        registeredCourses = new Course[10];
    }
    void register(Course c) {
        registeredCourses[numberOfCourses] = c;
        numberOfCourses ++;
    }
    double getTuition() {
        double tuition = 0;
        for(int i = 0; i < numberOfCourses; i ++ ) {
            tuition += registeredCourses[i].fee;
        }
        return tuition * discountRate ;
    }
}
```

No Inheritance: Testing Student Classes

```
class Course {  
    String title;  
    double fee;  
    Course(String title, double fee) {  
        this.title = title; this.fee = fee; } }  
}
```

```
class StudentTester {  
    static void main(String[] args) {  
        Course c1 = new Course("EECS2030", 500.00); /* title and fee */  
        Course c2 = new Course("EECS3311", 500.00); /* title and fee */  
        ResidentStudent jim = new ResidentStudent("J. Davis");  
        jim.setPremiumRate(1.25);  
        jim.register(c1); jim.register(c2);  
        NonResidentStudent jeremy = new NonResidentStudent("J. Gibbons");  
        jeremy.setDiscountRate(0.75);  
        jeremy.register(c1); jeremy.register(c2);  
        System.out.println("Jim pays " + jim.getTuition());  
        System.out.println("Jeremy pays " + jeremy.getTuition());  
    }  
}
```

No Inheritance: Issues with the Student Classes

- Implementations for the two student classes seem to work. But can you see any potential problems with it?
- The code of the two student classes share a lot in common.
- *Duplicates of code make it hard to maintain your software!*
- This means that when there is a change of policy on the common part, we need modify *more than one places*.

No Inheritance: Maintainability of Code (1)

What if the way for registering a course changes?

e.g.,

```
void register(Course c) {  
    if (numberOfCourses >= MAX_ALLOWANCE) {  
        throw new IllegalArgumentException("Maximum allowance reached.");  
    }  
    else {  
        registeredCourses[numberOfCourses] = c;  
        numberOfCourses++;  
    }  
}
```

We need to change the `register` method in *both* student classes!

No Inheritance: Maintainability of Code (2)

What if the way for calculating the base tuition changes?

e.g.,

```
double getTuition() {
    double tuition = 0;
    for(int i = 0; i < numberOfCourses; i++) {
        tuition += registeredCourses[i].fee;
    }
    /* ... can be premiumRate or discountRate */
    return tuition * inflationRate * ...;
}
```

We need to change the `getTuition` method in *both* student classes.

No Inheritance: A Collection of Various Kinds of Students

How do you define a class `StudentManagementSystem` that contains a list of *resident* and *non-resident* students?


```
class StudentManagementSystem {
    ResidentStudent[] rss;
    NonResidentStudent[] nrss;
    int nors; /* number of resident students */
    int nonrs; /* number of non-resident students */
    void addRS (ResidentStudent rs){ rss[nors]=rs; nors++; }
    void addNRS (NonResidentStudent nrs){ nrss[nonrs]=nrs; nonrs++; }
    void registerAll (Course c) {
        for(int i = 0; i < nors; i ++){ rss[i].register(c); }
        for(int i = 0; i < nonrs; i ++){ nrss[i].register(c); }
    }
}
```

But what if we later on introduce *more kinds of students*?

Very *inconvenient* to handle each list of students *separately*!

a polymorphic collection of students

Inheritance Architecture

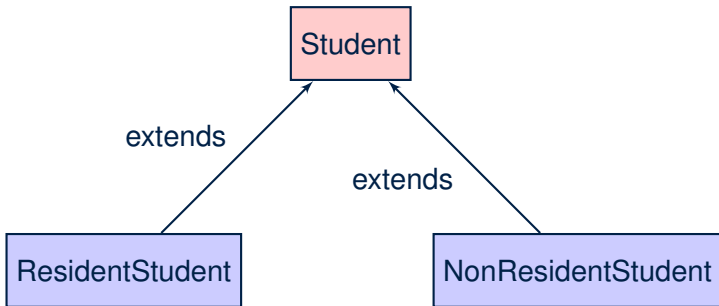

Inheritance: The Student Parent/Super Class

```
class Student {
    String name;
    Course[] registeredCourses;
    int numberOfCourses;

    Student (String name) {
        this.name = name;
        registeredCourses = new Course[10];
    }

    void register(Course c) {
        registeredCourses[numberOfCourses] = c;
        numberOfCourses ++;
    }

    double getTuition() {
        double tuition = 0;
        for(int i = 0; i < numberOfCourses; i ++) {
            tuition += registeredCourses[i].fee;
        }
        return tuition; /* base amount only */
    }
}
```

Inheritance:

The ResidentStudent Child/Sub Class

```
1 class ResidentStudent extends Student {
2     double premiumRate; /* there's a mutator method for this */
3     ResidentStudent (String name) { super(name); }
4     /* register method is inherited */
5     double getTuition() {
6         double base = super.getTuition();
7         return base * premiumRate;
8     }
9 }
```

- L1 declares that ResidentStudent inherits all attributes and methods (except constructors) from Student.
- There is no need to repeat the register method
- Use of *super* in L4 is as if calling Student (name)
- Use of *super* in L8 returns what getTuition() in Student returns.
- Use *super* to refer to attributes/methods defined in the super class:

`super.name`, `super.register(c)`.

Inheritance:


The NonResidentStudent Child/Sub Class

```
1 class NonResidentStudent extends Student {
2     double discountRate; /* there's a mutator method for this */
3     NonResidentStudent (String name) { super(name); }
4     /* register method is inherited */
5     double getTuition() {
6         double base = super.getTuition();
7         return base * discountRate;
8     }
9 }
```

- **L1** declares that NonResidentStudent inherits all attributes and methods (except constructors) from Student.
- There is no need to repeat the register method
- Use of *super* in **L4** is as if calling Student (name)
- Use of *super* in **L8** returns what getTuition() in Student returns.
- Use *super* to refer to attributes/methods defined in the super class:

`super.name`, `super.register(c)`.

Inheritance Architecture Revisited

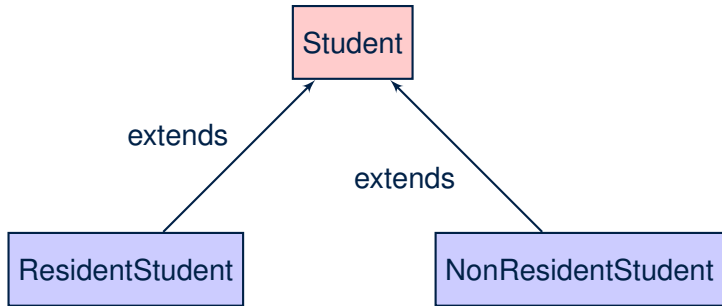

- The class that defines the common attributes and methods is called the *parent* or *super* class.
- Each “extended” class is called a *child* or *sub* class.

Using Inheritance for Code Reuse

Inheritance in Java allows you to:

- Define *common attributes and methods* in a separate class.
e.g., the `Student` class
- Define an “extended” version of the class which:
 - *inherits* definitions of all attributes and methods
e.g., `name`, `registeredCourses`, `numberOfCourses`
e.g., `register`
e.g., base amount calculation in `getTuition`
This means code reuse and elimination of code duplicates!
 - *defines new* attributes and methods if necessary
e.g., `setPremiumRate` for `ResidentStudent`
e.g., `setDiscountRate` for `NonResidentStudent`
 - *redefines/overrides* methods if necessary
e.g., compounded tuition for `ResidentStudent`
e.g., discounted tuition for `NonResidentStudent`

Visualizing Parent/Child Objects (1)




- A child class inherits **all** attributes from its parent class.
⇒ A child instance has **at least as many** attributes as an instance of its parent class.

Consider the following instantiations:

```
Student s = new Student("Stella");  
ResidentStudent rs = new ResidentStudent("Rachael");  
NonResidentStudent nrs = new NonResidentStudent("Nancy");
```

- How will these initial objects look like?

Visualizing Parent/Child Objects (2)

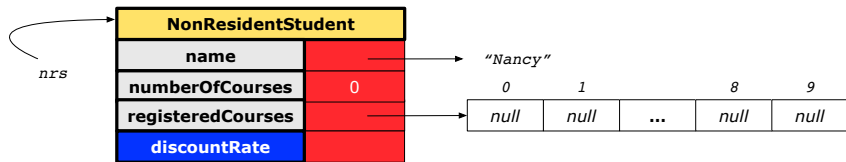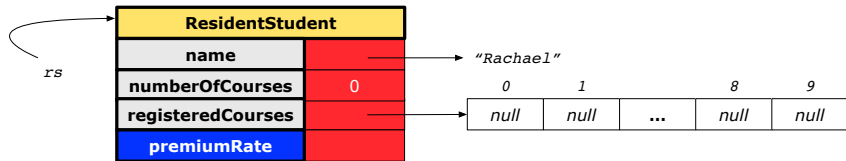


Testing the Two Student Sub-Classes

```
class StudentTester {
    static void main(String[] args) {
        Course c1 = new Course("EECS2030", 500.00); /* title and fee */
        Course c2 = new Course("EECS3311", 500.00); /* title and fee */
        ResidentStudent jim = new ResidentStudent("J. Davis");
        jim.setPremiumRate(1.25);
        jim.register(c1); jim.register(c2);
        NonResidentStudent jeremy = new NonResidentStudent("J. Gibbons");
        jeremy.setDiscountRate(0.75);
        jeremy.register(c1); jeremy.register(c2);
        System.out.println("Jim pays " + jim.getTuition());
        System.out.println("Jeremy pays " + jeremy.getTuition());
    }
}
```

- The software can be used in exactly the same way as before (because we did not modify *method signatures*).
- But now the internal structure of code has been made *maintainable* using *inheritance*.

Inheritance Architecture: Static Types & Expectations



```

/* new attributes, new methods */
ResidentStudent(String name)
double premiumRate
void setPremiumRate(double r)
/* redefined/overridden methods */
double getTuition()
    
```

```

/* new attributes, new methods */
NonResidentStudent(String name)
double discountRate
void setDiscountRate(double r)
/* redefined/overridden methods */
double getTuition()
    
```

```

Student s = new Student("Stella");
ResidentStudent rs = new ResidentStudent("Rachael");
NonResidentStudent nrs = new NonResidentStudent("Nancy");
    
```

	name	rCS	noC	reg	getT	pr	setPR	dr	setDR
s.			✓					×	
rs.			✓			✓			×
nrs.			✓			×			✓

Polymorphism: Intuition (1)

```

1 Student s = new Student("Stella");
2 ResidentStudent rs = new ResidentStudent("Rachael");
3 rs.setPremiumRate(1.25);
4 s = rs; /* Is this valid? */
5 rs = s; /* Is this valid? */

```

- Which one of **L4** and **L5** is *valid*? Which one is *invalid*?

- **Hints:**

- **L1:** What *kind* of address can *s* store? [Student]
 ∴ The context object *s* is *expected* to be used as:
 - *s*.register(eecs2030) and *s*.getTuition()
- **L2:** What *kind* of address can *rs* store? [ResidentStudent]
 ∴ The context object *rs* is *expected* to be used as:
 - *rs*.register(eecs2030) and *rs*.getTuition()
 - *rs.setPremiumRate(1.50)* [increase premium rate]


Polymorphism: Intuition (2)

```

1 Student s = new Student("Stella");
2 ResidentStudent rs = new ResidentStudent("Rachael");
3 rs.setPremiumRate(1.25);
4 s = rs; /* Is this valid? */
5 rs = s; /* Is this valid? */

```

- rs = s (L5)** should be *invalid*:

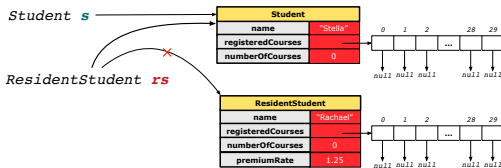

- Since **rs** is declared of type **ResidentStudent**, a subsequent call **rs.setPremiumRate(1.50)** can be expected.
- rs** is now pointing to a **Student** object.
- Then, what would happen to **rs.setPremiumRate(1.50)**?

CRASH

\therefore **rs.premiumRate** is *undefined*!!


Polymorphism: Intuition (3)

```

1 Student s = new Student("Stella");
2 ResidentStudent rs = new ResidentStudent("Rachael");
3 rs.setPremiumRate(1.25);
4 s = rs; /* Is this valid? */
5 rs = s; /* Is this valid? */

```

- $s = rs$ (L4) should be *valid*:

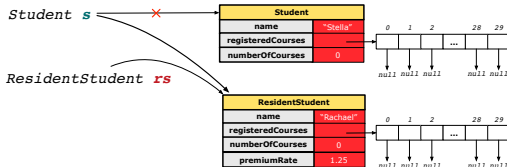

- Since `s` is declared of type `Student`, a subsequent call `s.setPremiumRate(1.50)` is *never* expected.
- `s` is now pointing to a `ResidentStudent` object.
- Then, what would happen to `s.getTuition()`?

OK

$\therefore s.premiumRate$ is *never directly used*!!


Dynamic Binding: Intuition (1)

```

1 Course eecs2030 = new Course("EECS2030", 100.0);
2 Student s;
3 ResidentStudent rs = new ResidentStudent("Rachael");
4 NonResidentStudent nrs = new NonResidentStudent("Nancy");
5 rs.setPremiumRate(1.25); rs.register(eecs2030);
6 nrs.setDiscountRate(0.75); nrs.register(eecs2030);
7 s = rs; System.out.println(s.getTuition()); /* output: 125.0 */
8 s = nrs; System.out.println(s.getTuition()); /* output: 75.0 */

```

After `s = rs` (L7), `s` points to a ResidentStudent object.
 ⇒ Calling `s.getTuition()` applies the premiumRate.

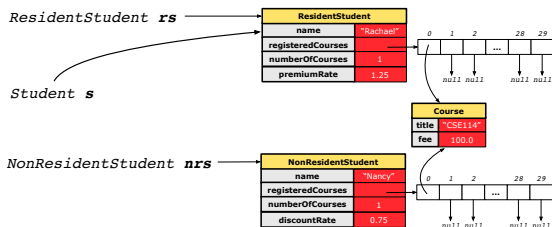


Dynamic Binding: Intuition (2)

```


1 Course eecs2030 = new Course("EECS2030", 100.0);
2 Student s;
3 ResidentStudent rs = new ResidentStudent("Rachael");
4 NonResidentStudent nrs = new NonResidentStudent("Nancy");
5 rs.setPremiumRate(1.25); rs.register(eecs2030);
6 nrs.setDiscountRate(0.75); nrs.register(eecs2030);
7 s = rs; System.out.println(s.getTuition()); /* output: 125.0 */
8 s = nrs; System.out.println(s.getTuition()); /* output: 75.0 */

```


After `s = nrs` (L8), `s` points to a `NonResidentStudent` object.
 ⇒ Calling `s.getTuition()` applies the `discountRate`.

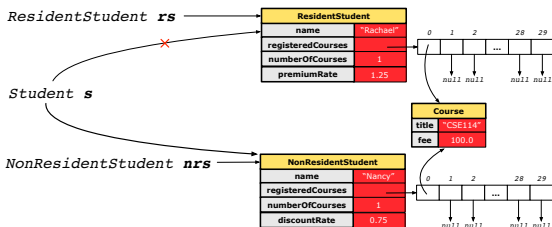

Multi-Level Inheritance Architecture

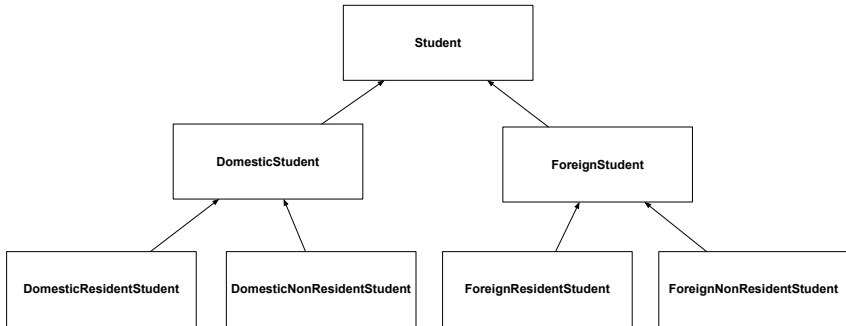

Multi-Level Inheritance Hierarchy: Smart Phones

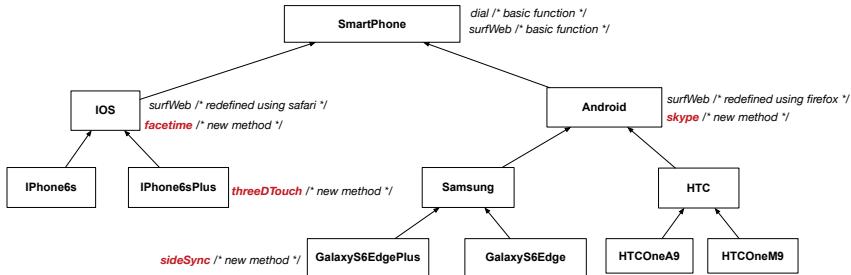

Inheritance Forms a Type Hierarchy

- A (data) **type** denotes a set of related *runtime values*.
 - Every *class* can be used as a type: the set of runtime *objects*.
- Use of *inheritance* creates a **hierarchy** of classes:
 - (Implicit) Root of the hierarchy is `Object`.
 - Each `extends` declaration corresponds to an upward arrow.
 - The `extends` relationship is *transitive*: when A extends B and B extends C, we say A *indirectly* extends C.
e.g., Every class implicitly `extends` the `Object` class.
- **Ancestor** vs. **Descendant** classes:
 - The **ancestor classes** of a class A are: A itself and all classes that A directly, or indirectly, extends.
 - A inherits all code (attributes and methods) from its *ancestor classes*.
∴ A's instances have a **wider range of expected usages** (i.e., attributes and methods) than instances of its *ancestor* classes.
 - The **descendant classes** of a class A are: A itself and all classes that directly, or indirectly, extends A.
 - Code defined in A is inherited to all its *descendant classes*.

Inheritance Accumulates Code for Reuse


- The *lower* a class is in the type hierarchy, the *more code* it accumulates from its *ancestor classes*:
 - A *descendant class* inherits all code from its *ancestor classes*.
 - A *descendant class* may also:
 - Declare new attributes
 - Define new methods
 - **Redefine / Override** inherited methods
- Consequently:
 - When being used as **context objects**, instances of a class' *descendant classes* have a *wider range of expected usages* (i.e., attributes and methods).
 - When expecting an object of a particular class, we may **substitute** it with (**re-assign** it to) an object of any of its *descendant classes*.
 - e.g., When expecting a Student object, we may substitute it with either a ResidentStudent or a NonResidentStudent object.
 - **Justification:** A *descendant class* contains **at least as many** methods as defined in its *ancestor classes* (but not vice versa!).

Reference Variable: Static Type

- A reference variable's **static type** is what we declare it to be.
 - `Student jim` declares jim's ST as Student.
 - `SmartPhone myPhone` declares myPhone's ST as SmartPhone.
 - The **static type** of a reference variable **never changes**.
- For a reference variable v , its **static type** C defines the **expected usages of v as a context object**.
- A method call $v.m(\dots)$ is **compilable** if m is defined in C .
 - e.g., After declaring `Student jim`, we
 - **may** call `register` and `getTuition` on `jim`
 - **may not** call `setPremiumRate` (specific to a resident student) or `setDiscountRate` (specific to a non-resident student) on `jim`
 - e.g., After declaring `SmartPhone myPhone`, we
 - **may** call `dial` and `surfWeb` on `myPhone`
 - **may not** call `facetime` (specific to an IOS phone) or `skype` (specific to an Android phone) on `myPhone`

Substitutions via Assignments

- By declaring $c1$ $v1$, *reference variable* $v1$ will store the *address* of an object “of class $C1$ ” at runtime.
- By declaring $c2$ $v2$, *reference variable* $v2$ will store the *address* of an object “of class $C2$ ” at runtime.
- Assignment $v1 = v2$ *copies address* stored in $v2$ into $v1$.
 - $v1$ will instead point to wherever $v2$ is pointing to. [*object alias*]

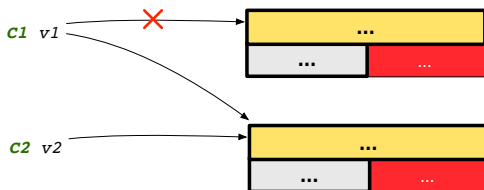

- In such assignment $v1 = v2$, we say that we *substitute* an object of (*static*) type $C1$ by an object of (*static*) type $C2$.
- *Substitutions* are subject to *rules*!

Rules of Substitution

When expecting an object of **static type** A :


- It is **safe** to **substitute** it with an object whose **static type** is any of the **descendant class** of A (including A).
 - \therefore Each **descendant class** of A , being the new substitute, is guaranteed to contain all (non-private) attributes/methods defined in A .
 - e.g., When expecting an IOS phone, you **can** substitute it with either an iPhone6s or iPhone6sPlus.
- It is **unsafe** to **substitute** it with an object whose **static type** is any of the **ancestor classes of A 's parent** (excluding A).
 - \therefore Class A may have defined new methods that do not exist in any of its **parent's ancestor classes**.
 - e.g., When expecting IOS phone, **unsafe** to substitute it with a SmartPhone `: facetime not supported in Android phone`.
- It is also **unsafe** to **substitute** it with an object whose **static type** is neither an ancestor nor a descendant of A .
 - e.g., When expecting IOS phone, **unsafe** to substitute it with an HTC `: facetime not supported in Android phone`.

Reference Variable: Dynamic Type

A *reference variable's* **dynamic type** is the type of object that it is currently pointing to at runtime.

- The *dynamic type* of a reference variable *may change* whenever we **re-assign** that variable to a different object.
- There are two ways to re-assigning a reference variable.

Visualizing Static Type vs. Dynamic Type

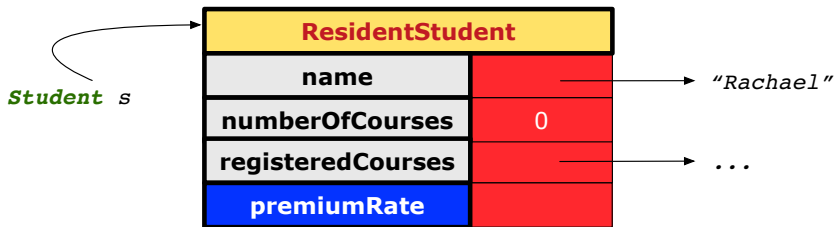

- Each segmented box denotes a *runtime* object.
- Arrow denotes a variable (e.g., `s`) storing the object's address. Usually, when the context is clear, we leave the variable's *static type* implicit (`Student`).
- Title of box indicates type of runtime object, which denotes the *dynamic type* of the variable (`ResidentStudent`).

Reference Variable: Changing Dynamic Type (1)

Re-assigning a reference variable to a newly-created object:

- `Substitution Principle`: the new object's class must be a **descendant class** of the reference variable's *static type*.
- e.g., `Student jim = new ResidentStudent (...)` changes the *dynamic type* of jim to ResidentStudent.
- e.g., `Student jim = new NonResidentStudent (...)` changes the *dynamic type* of jim to NonResidentStudent.
- e.g., `ResidentStudent jim = new Student (...)` is illegal because Student is **not a descendant class** of the *static type* of jim (i.e., ResidentStudent).

Reference Variable: Changing Dynamic Type (2)

Re-assigning a reference variable `v` to an existing object that is referenced by another variable `other` (i.e., `v = other`):

- **Substitution Principle**: the static type of `other` must be a **descendant class** of `v`'s *static type*.
- e.g., Say we declare

```
Student jim = new Student(...);
ResidentStudent rs = new ResidentStudent(...);
NonResidentStudent nrs = new NonResidentStudent(...);
```

- `rs = jim` ✗
- `nrs = jim` ✗
- `jim = rs` ✓
changes the *dynamic type* of `jim` to the dynamic type of `rs`
- `jim = nrs` ✓
changes the *dynamic type* of `jim` to the dynamic type of `nrs`

Polymorphism and Dynamic Binding (1)

- **Polymorphism**: An object variable may have “*multiple possible shapes*” (i.e., allowable *dynamic types*).
 - Consequently, there are *multiple possible versions* of each method that may be called.
 - e.g., A **Student** variable may have the *dynamic type* of **Student**, **ResidentStudent**, or **NonResidentStudent**,
 - This means that there are three possible versions of the `getTuition()` that may be called.
- **Dynamic binding**: When a method `m` is called on an object variable, the version of `m` corresponding to its “*current shape*” (i.e., one defined in the *dynamic type* of `m`) will be called.

```
Student jim = new ResidentStudent(...);
jim.getTuition(); /* version in ResidentStudent */
jim = new NonResidentStudent(...);
jim.getTuition(); /* version in NonResidentStudent */
```

Polymorphism and Dynamic Binding (2.1)

```
class Student {...}
class ResidentStudent extends Student {...}
class NonResidentStudent extends Student {...}
```

```
class StudentTester1 {
    public static void main(String[] args) {
        Student jim = new Student("J. Davis");
        ResidentStudent rs = new ResidentStudent("J. Davis");
        jim = rs; /* legal */
        rs = jim; /* illegal */


        NonResidentStudent nrs = new NonResidentStudent("J. Davis");
        jim = nrs; /* legal */
        nrs = jim; /* illegal */
    }
}
```

Polymorphism and Dynamic Binding (2.2)

```
class Student {...}
class ResidentStudent extends Student {...}
class NonResidentStudent extends Student {...}
```

```
class StudentTester2 {
    public static void main(String[] args) {
        Course eecs2030 = new Course("EECS2030", 500.0);
        Student jim = new Student("J. Davis");
        ResidentStudent rs = new ResidentStudent("J. Davis");
        rs.setPremiumRate(1.5);
        jim = rs;
        System.out.println(jim.getTuition()); /* 750.0 */
        NonResidentStudent nrs = new NonResidentStudent("J. Davis");
        nrs.setDiscountRate(0.5);
        jim = nrs;
        System.out.println(jim.getTuition()); /* 250.0 */
    }
}
```

Polymorphism and Dynamic Binding (3.1)

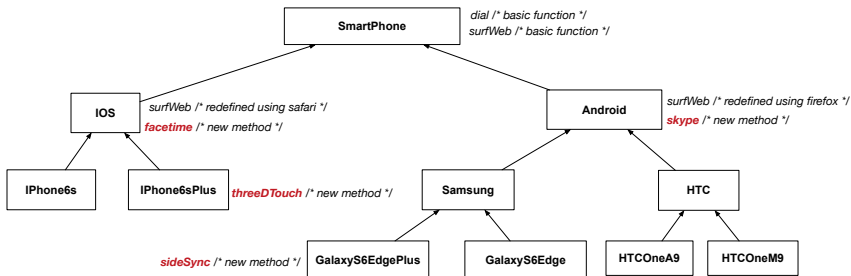

Polymorphism and Dynamic Binding (3.2)

```
class SmartPhoneTest1 {
    public static void main(String[] args) {
        SmartPhone myPhone;
        IOS ip = new iPhone6sPlus();
        Samsung ss = new GalaxyS6Edge();
        myPhone = ip; /* legal */
        myPhone = ss; /* legal */

        IOS presentForHeeyeon;
        presentForHeeyeon = ip; /* legal */
        presentForHeeyeon = ss; /* illegal */
    }
}
```


Polymorphism and Dynamic Binding (3.3)

```
class SmartPhoneTest2 {
    public static void main(String[] args) {
        SmartPhone myPhone;
        IOS ip = new iPhone6sPlus();
        myPhone = ip;
        myPhone.surfWeb (); /* version of surfWeb in iPhone6sPlus */

        Samsung ss = new GalaxyS6Edge ();
        myPhone = ss;
        myPhone.surfWeb (); /* version of surfWeb in GalaxyS6Edge */
    }
}
```

Reference Type Casting: Motivation (1.1)

```
1 Student jim = new ResidentStudent("J. Davis");  
2 ResidentStudent rs = jim;  
3 rs.setPremiumRate(1.5);
```


- **L1** is *legal*: ResidentStudent is a **descendant class** of the **static type** of jim (i.e., Student).
- **L2** is *illegal*: jim's **ST** (i.e., Student) is **not** a **descendant class** of rs's **ST** (i.e., ResidentStudent).
Java compiler is *unable to infer* that jim's **dynamic type** in **L2** is ResidentStudent!

- Force the Java compiler to believe so via a cast in **L2**:

```
ResidentStudent rs = (ResidentStudent) jim;
```

- The cast `(ResidentStudent) jim` on the **RHS of =** temporarily modifies jim's **ST** to ResidentStudent.
- Alias rs of **ST** ResidentStudent is then created via an assignment.
- **dynamic binding**: After the **cast**, **L3** will execute the correct version of setPremiumRate.

Reference Type Casting: Motivation (1.2)

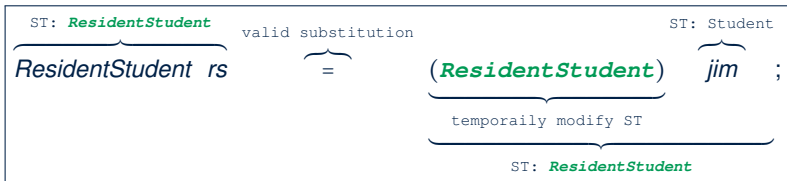

- Variable *rs* is declared of **static type (ST)** *ResidentStudent*.
- Variable *jim* is declared of **ST** *Student*.
- The cast expression *(ResidentStudent)* jim **temporarily** modifies *jim*'s **ST** to *ResidentStudent*.
 - ⇒ Such a cast makes the assignment valid.
 - ∴ RHS's **ST** (*ResidentStudent*) is a descendant of LHS's **ST** (*ResidentStudent*).
 - ⇒ The assignment creates an alias *rs* with **ST** *ResidentStudent*.
- **No** new object is created.
 - Only an **alias** *rs* with a different **ST** (*ResidentStudent*) is created.
- After the assignment, *jim*'s **ST** **remains** *Student*.

Reference Type Casting: Motivation (2.1)

```
1 SmartPhone aPhone = new iPhone6sPlus();
2 IOS forHeeyeon = aPhone;
3 forHeeyeon.facetime();
```


- **L1** is *legal*: iPhone6sPlus is a **descendant class** of the **static type** of aPhone (i.e., SmartPhone).
- **L2** is *illegal*: aPhone's **ST** (i.e., SmartPhone) is **not** a **descendant class** of forHeeyeon's **ST** (i.e., IOS).
Java compiler is *unable to infer* that aPhone's **dynamic type** in **L2** is iPhone6sPlus!

- Force Java compiler to believe so via a **cast** in **L2**:

```
IOS forHeeyeon = (iPhone6sPlus) aPhone;
```

- The cast `(iPhone6sPlus) aPhone` on the **RHS of =** temporarily modifies aPhone's **ST** to iPhone6sPlus.
- Alias forHeeyeon of **ST** IOS is then created via an assignment.
- **dynamic binding**: After the **cast**, **L3** will execute the correct version of facetime.

Reference Type Casting: Motivation (2.2)

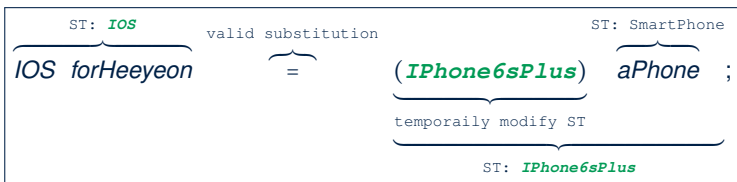

- Variable `forHeeyeon` is declared of **static type (ST)** `IOS`.
- Variable `aPhone` is declared of **ST** `SmartPhone`.
- The cast expression `(iPhone6sPlus) aPhone` **temporarily** modifies `aPhone`'s **ST** to `iPhone6sPlus`.
 - ⇒ Such a cast makes the assignment valid.
 - ∴ RHS's **ST** (`iPhone6sPlus`) is a descendant of LHS's **ST** (`IOS`).
 - ⇒ The assignment creates an alias `forHeeyeon` with **ST** `IOS`.
- **No** new object is created.
 - Only an **alias** `forHeeyeon` with a different **ST** (`IOS`) is created.
- After the assignment, `aPhone`'s **ST** **remains** `SmartPhone`.

Type Cast: Named or Anonymous

Named Cast: Use intermediate variable to store the cast result.

```
SmartPhone aPhone = new iPhone6sPlus();  
IOS forHeeyeon = (iPhone6sPlus) aPhone;  
forHeeyeon.facetime();
```

Anonymous Cast: Use the cast result directly.

```
SmartPhone aPhone = new iPhone6sPlus();  
((iPhone6sPlus) aPhone).facetime();
```

Common Mistake:

```
1 SmartPhone aPhone = new iPhone6sPlus();  
2 ((iPhone6sPlus) aPhone).facetime();
```

L2 \equiv `(iPhone6sPlus) (aPhone.facetime())`: Call, then cast.
 \Rightarrow This does **not** compile \because `facetime()` is **not** declared in the *static type* of `aPhone` (`SmartPhone`).

Notes on Type Cast (1)

- Given variable v of **static type** ST_v , it is **compilable** to cast v to C , as long as C is an **ancestor** or **descendant** of ST_v .
- Without cast, we can **only** call methods defined in ST_v on v .
- Casting v to C **temporarily** changes the **ST** of v from ST_v to C .
 ⇒ All methods that are defined in C can be called.

```

Android myPhone = new GalaxyS6EdgePlus();
/* can call methods declared in Android on myPhone
 * dial, surfweb, skype ✓ sideSync × */
SmartPhone sp = (SmartPhone) myPhone;
/* Compiles OK ∴ SmartPhone is an ancestor class of Android
 * expectations on sp narrowed to methods in SmartPhone
 * sp.dial, sp.surfweb ✓ sp.skype, sp.sideSync × */
GalaxyS6EdgePlus ga = (GalaxyS6EdgePlus) myPhone;
/* Compiles OK ∴ GalaxyS6EdgePlus is a descendant class of Android
 * expectations on ga widened to methods in GalaxyS6EdgePlus
 * ga.dial, ga.surfweb, ga.skype, ga.sideSync ✓ */

```

Reference Type Casting: Danger (1)

```
1 Student jim = new NonResidentStudent("J. Davis");  
2 ResidentStudent rs = (ResidentStudent) jim;  
3 rs.setPremiumRate(1.5);
```

- **L1** is *legal*: *NonResidentStudent* is a **descendant** of the static type of *jim* (*Student*).
- **L2** is *legal* (where the cast type is *ResidentStudent*):
 - cast type is **descendant** of *jim*'s ST (*Student*).
 - cast type is **descendant** of *rs*'s ST (*ResidentStudent*).
- **L3** is *legal* ∴ *setPremiumRate* is in *rs*' **ST** *ResidentStudent*.
- Java compiler is *unable to infer* that *jim*'s **dynamic type** in **L2** is actually *NonResidentStudent*.
- Executing **L2** will result in a ***ClassCastException***.
∴ Attribute *premiumRate* (expected from a *ResidentStudent*) is *undefined* on the *NonResidentStudent* object being cast.

Reference Type Casting: Danger (2)

```

1 SmartPhone aPhone = new GalaxyS6EdgePlus ();
2 iPhone6sPlus forHeeyeon = (iPhone6sPlus) aPhone;
3 forHeeyeon.threeDTouch ();
  
```

- **L1** is *legal*: GalaxyS6EdgePlus is a **descendant** of the static type of aPhone (SmartPhone).
- **L2** is *legal* (where the cast type is iPhone6sPlus):
 - cast type is **descendant** of aPhone's ST (SmartPhone).
 - cast type is **descendant** of forHeeyeon's ST (iPhone6sPlus).
- **L3** is *legal* ∵ threeDTouch is in forHeeyeon' **ST** iPhone6sPlus.
- Java compiler is *unable to infer* that aPhone's **dynamic type** in **L2** is actually NonResidentStudent.
- Executing **L2** will result in a **ClassCastException**.
 - ∵ Methods facetime, threeDTouch (expected from an **iPhone6sPlus**) is *undefined* on the **GalaxyS6EdgePlus** object being cast.

Notes on Type Cast (2.1)

Given a variable v of static type ST_v and dynamic type DT_v :

- `(C) v` is **compilable** if C is ST_v 's **ancestor** or **descendant**.
- Casting v to C 's **ancestor/descendant** **narrows/widens** expectations.
- However, being **compilable** does not guarantee **runtime-error-free!**

```

1 SmartPhone myPhone = new Samsung();
2 /* ST of myPhone is SmartPhone; DT of myPhone is Samsung */
3 GalaxyS6EdgePlus ga = (GalaxyS6EdgePlus) myPhone;
4 /* Compiles OK ∴ GalaxyS6EdgePlus is a descendant class of SmartPhone
5  * can now call methods declared in GalaxyS6EdgePlus on ga
6  * ga.dial, ga.surfweb, ga.skype, ga.sideSync ✓ */

```

- Type cast in **L3** is **compilable**.
- Executing **L3** will cause **ClassCastException**.

L3: myPhone's **DT** Samsung cannot meet expectations of the temporary **ST** GalaxyS6EdgePlus (e.g., sideSync).

Notes on Type Cast (2.2)

Given a variable v of static type ST_v and dynamic type DT_v :

- `(C) v` is **compilable** if C is ST_v 's **ancestor** or **descendant**.
- Casting v to C 's **ancestor/descendant** **narrows/widens** expectations.
- However, being **compilable** does not guarantee **runtime-error-free!**

```

1 SmartPhone myPhone = new Samsung();
2 /* ST of myPhone is SmartPhone; DT of myPhone is Samsung */
3 iPhone6sPlus ip = (iPhone6sPlus) myPhone;
4 /* Compiles OK ∴ iPhone6sPlus is a descendant class of SmartPhone
5  * can now call methods declared in iPhone6sPlus on ip
6  * ip.dial, ip.surfweb, ip.facetime, ip.threeDTouch ✓ */

```

- Type cast in **L3** is **compilable**.
- Executing **L3** will cause **ClassCastException**.

L3: myPhone's **DT** Samsung cannot meet expectations of the temporary **ST** iPhone6sPlus (e.g., threeDTouch).

Notes on Type Cast (2.3)

A cast $(C) \ v$ is *compilable* and *runtime-error-free* if C is located along the **ancestor path** of DT_v .

e.g., Given `Android myPhone = new Samsung();`

- Cast `myPhone` to a class along the **ancestor path** of its *DT Samsung*.
- Casting `myPhone` to a class with more expectations than its *DT Samsung* (e.g., `GalaxyS6EdgePlus`) will cause `ClassCastException`.
- Casting `myPhone` to a class irrelevant to its *DT Samsung* (e.g., `HTCOneA9`) will cause `ClassCastException`.

Required Reading: Static Types, Dynamic Types, Casts

https://www.eecs.yorku.ca/~jackie/teaching/lectures/2018/F/EECS2030/notes/EECS2030_F18_Notes_Static_Types_Cast.pdf

Compilable Cast vs. Exception-Free Cast

```
class A { }  
class B extends A { }  
class C extends B { }  
class D extends A { }
```

```
1 B b = new C();  
2 D d = (D) b;
```

- After **L1**:
 - **ST** of b is B
 - **DT** of b is C
- Does **L2** compile? [No]
∴ cast type D is neither an ancestor nor a descendant of b's **ST** B
- Would `D d = (D) ((A) b)` fix **L2**? [YES]
∴ cast type D is an ancestor of b's cast, temporary **ST** A
- `ClassCastException` when executing this fixed **L2**? [YES]
∴ cast type D is not an ancestor of b's **DT** C

Reference Type Casting: Runtime Check (1)

```
1 Student jim = new NonResidentStudent("J. Davis");
2 if (jim instanceof ResidentStudent) {
3     ResidentStudent rs = (ResidentStudent) jim;
4     rs.setPremiumRate(1.5);
5 }
```

- **L1** is *legal*: *NonResidentStudent* is a **descendant class** of the *static type* of jim (i.e., *Student*).
- **L2** checks if jim's *dynamic type* is *ResidentStudent*.
FALSE ∴ jim's *dynamic type* is *NonResidentStudent*!
- **L3** is *legal*: jim's cast type (i.e., *ResidentStudent*) is a **descendant class** of rs's *static type* (i.e., *ResidentStudent*).
- **L3** will not be executed at runtime, hence no *ClassCastException*, thanks to the check in **L2**!

Reference Type Casting: Runtime Check (2)

```
1 SmartPhone aPhone = new GalaxyS6EdgePlus ();
2 if (aPhone instanceof iPhone6sPlus) {
3     IOS forHeeyeon = (iPhone6sPlus) aPhone;
4     forHeeyeon.facetime();
5 }
```

- **L1** is *legal*: GalaxyS6EdgePlus is a **descendant class** of the static type of aPhone (i.e., SmartPhone).
- **L2** checks if aPhone's **dynamic type** is iPhone6sPlus.
FALSE ∴ aPhone's **dynamic type** is GalaxyS6EdgePlus!
- **L3** is *legal*: aPhone's cast type (i.e., iPhone6sPlus) is a **descendant class** of forHeeyeon's **static type** (i.e., IOS).
- **L3** will not be executed at runtime, hence no `ClassCastException`, thanks to the check in **L2**!

Notes on the instanceof Operator (1)

Given a reference variable v and a class C , you write

```
v instanceof C
```

to check if the **dynamic type** of v , at the moment of being checked, is a **descendant class** of C (so that `(C) v` is safe).

```
SmartPhone myPhone = new Samsung();
println(myPhone instanceof Android);
/* true :: Samsung is a descendant of Android */
println(myPhone instanceof Samsung);
/* true :: Samsung is a descendant of Samsung */
println(myPhone instanceof GalaxyS6Edge);
/* false :: Samsung is not a descendant of GalaxyS6Edge */
println(myPhone instanceof IOS);
/* false :: Samsung is not a descendant of IOS */
println(myPhone instanceof iPhone6sPlus);
/* false :: Samsung is not a descendant of iPhone6sPlus */
```

⇒ **Samsung** is the most specific type which myPhone can be safely cast to.

Notes on the instanceof Operator (2)

Given a reference variable v and a class C ,

`v instanceof C` checks if the **dynamic type** of v , at the moment of being checked, is a descendant class of C .

```

1 SmartPhone myPhone = new Samsung();
2 /* ST of myPhone is SmartPhone; DT of myPhone is Samsung */
3 if(myPhone instanceof Samsung) {
4     Samsung samsung = (Samsung) myPhone;
5 }
6 if(myPhone instanceof GalaxyS6EdgePlus) {
7     GalaxyS6EdgePlus galaxy = (GalaxyS6EdgePlus) myPhone;
8 }
9 if(myPhone instanceof HTC) {
10    HTC htc = (HTC) myPhone;
11 }
    
```

- **L3** evaluates to *true*. [safe to cast]
- **L6** and **L9** evaluate to *false*. [unsafe to cast]

This prevents **L7** and **L10**, causing `ClassCastException` if executed, from being executed.

Static Type and Polymorphism (1.1)

```
class SmartPhone {  
    void dial() { ... }  
}  
class IOS extends SmartPhone {  
    void facetime() { ... }  
}  
class iPhone6sPlus extends IOS {  
    void threeDTouch() { ... }  
}
```

```
1 SmartPhone sp = new iPhone6sPlus();    ✓  
2 sp.dial();                               ✓  
3 sp.facetime();                            ×  
4 sp.threeDTouch();                         ×
```

Static type of *sp* is SmartPhone

⇒ can only call methods defined in SmartPhone on *sp*

Static Type and Polymorphism (1.2)

```
class SmartPhone {  
    void dial() { ... }  
}  
class IOS extends SmartPhone {  
    void facetime() { ... }  
}  
class iPhone6sPlus extends IOS {  
    void threeDTouch() { ... }  
}
```

```
1 IOS ip = new iPhone6sPlus();    ✓  
2 ip.dial();                       ✓  
3 ip.facetime();                   ✓  
4 ip.threeDTouch();                ✗
```

Static type of *ip* is IOS

⇒ can only call methods defined in IOS on *ip*

Static Type and Polymorphism (1.3)

```
class SmartPhone {  
    void dial() { ... }  
}  
class IOS extends SmartPhone {  
    void facetime() { ... }  
}  
class iPhone6sPlus extends IOS {  
    void threeDTouch() { ... }  
}
```

```
1 iPhone6sPlus ip6sp = new iPhone6sPlus();    ✓  
2 ip6sp.dial();                               ✓  
3 ip6sp.facetime();                           ✓  
4 ip6sp.threeDTouch();                        ✓
```

Static type of *ip6sp* is iPhone6sPlus

⇒ can call all methods defined in iPhone6sPlus on *ip6sp*

Static Type and Polymorphism (1.4)

```
class SmartPhone {  
    void dial() { ... }  
}  
class IOS extends SmartPhone {  
    void facetime() { ... }  
}  
class iPhone6sPlus extends IOS {  
    void threeDTouch() { ... }  
}
```

```
1 SmartPhone sp = new iPhone6sPlus(); ✓  
2 ( iPhone6sPlus ) sp.dial(); ✓  
3 ( iPhone6sPlus ) sp.facetime(); ✓  
4 ( iPhone6sPlus ) sp.threeDTouch(); ✓
```

L4 is equivalent to the following two lines:

```
iPhone6sPlus ip6sp = ( iPhone6sPlus ) sp;  
ip6sp.threeDTouch();
```

Static Type and Polymorphism (2)

Given a reference variable declaration

```
C v;
```

- **Static type** of reference variable v is class C
- A method call `v.m` is valid if m is a method **defined** in class **C** .
- Despite the **dynamic type** of v , you are only allowed to call methods that are defined in the **static type** C on v .
- If you are certain that v 's **dynamic type** can be expected **more** than its **static type**, then you may use an `instanceof` check and a cast.

```
Course eecs2030 = new Course("EECS2030", 500.0);
Student s = new ResidentStudent("Jim");
s.register(eecs2030);
if(s instanceof ResidentStudent) {
    ((ResidentStudent) s).setPremiumRate(1.75);
    System.out.println(((ResidentStudent) s).getTuition());
}
```

Polymorphism: Method Call Arguments (1)

```
1 class StudentManagementSystem {
2     Student [] ss; /* ss[i] has static type Student */ int c;
3     void addRS(ResidentStudent rs) { ss[c] = rs; c++; }
4     void addNRS(NonResidentStudent nrs) { ss[c] = nrs; c++; }
5     void addStudent(Student s) { ss[c] = s; c++; } }
```

- **L3:** `ss[c] = rs` is valid. ∴ RHS's ST `ResidentStudent` is a *descendant class* of LHS's ST `Student`.
- Say we have a `StudentManagementSystem` object `sms`:
 - `sms.addRS(o)` attempts the following assignment (recall call by value), which replaces parameter `rs` by a copy of argument `o`:

```
rs = o;
```

 - Whether this argument passing is valid depends on `o`'s *static type*.
- In the signature of a method `m`, if the type of a parameter is class `C`, then we may call method `m` by passing objects whose *static types* are `C`'s *descendants*.

Polymorphism: Method Call Arguments (2.1)

In the StudentManagementSystemTester:

```
Student s1 = new Student();  
Student s2 = new ResidentStudent();  
Student s3 = new NonResidentStudent();  
ResidentStudent rs = new ResidentStudent();  
NonResidentStudent nrs = new NonResidentStudent();  
StudentManagementSystem sms = new StudentManagementSystem();  
sms.addRS(s1);    ×  
sms.addRS(s2);    ×  
sms.addRS(s3);    ×  
sms.addRS(rs);    ✓  
sms.addRS(nrs);   ×  
sms.addStudent(s1); ✓  
sms.addStudent(s2); ✓  
sms.addStudent(s3); ✓  
sms.addStudent(rs); ✓  
sms.addStudent(nrs); ✓
```

Polymorphism: Method Call Arguments (2.2)

In the StudentManagementSystemTester:

```
1 Student s = new Student("Stella");
2 /* s' ST: Student; s' DT: Student */
3 StudentManagementSystem sms = new StudentManagementSystem();
4 sms.addRS(s); ✗
```

- o **L4 compiles** with a cast: `sms.addRS((ResidentStudent) s)`
 - **Valid** cast \therefore (ResidentStudent) is a descendant of s' **ST**.
 - **Valid** call \therefore s' temporary **ST** (ResidentStudent) is now a descendant class of addRS's parameter rs' **ST** (ResidentStudent).
- o But, there will be a **ClassCastException** at runtime!
 \therefore s' **DT** (Student) is **not** a descendant of ResidentStudent.
- o We should have written:

```
if(s instanceof ResidentStudent) {
    sms.addRS((ResidentStudent) s);
}
```

The **instanceof** expression will evaluate to **false**, meaning it is **unsafe** to cast, thus preventing ClassCastException.

Polymorphism: Method Call Arguments (2.3)

In the StudentManagementSystemTester:

```
1 Student s = new NonResidentStudent("Nancy");
2 /* s' ST: Student; s' DT: NonResidentStudent */
3 StudentManagementSystem sms = new StudentManagementSystem();
4 sms.addRS(s); ✗
```

- o **L4 compiles** with a cast: `sms.addRS((ResidentStudent) s)`
 - **Valid** cast \therefore (ResidentStudent) is a descendant of s' **ST**.
 - **Valid** call \therefore s' temporary **ST** (ResidentStudent) is now a descendant class of addRS's parameter rs' **ST** (ResidentStudent).
- o But, there will be a **ClassCastException** at runtime!
 \therefore s' **DT** (NonResidentStudent) **not descendant** of ResidentStudent.
- o We should have written:

```
if(s instanceof ResidentStudent) {
    sms.addRS((ResidentStudent) s);
}
```

The **instanceof** expression will evaluate to **false**, meaning it is **unsafe** to cast, thus preventing ClassCastException.

Polymorphism: Method Call Arguments (2.4)

In the StudentManagementSystemTester:

```
1 Student s = new ResidentStudent("Rachael");
2 /* s' ST: Student; s' DT: ResidentStudent */
3 StudentManagementSystem sms = new StudentManagementSystem();
4 sms.addRS(s); ×
```

- o **L4 compiles** with a cast: `sms.addRS((ResidentStudent) s)`
 - **Valid** cast \therefore (ResidentStudent) is a descendant of s' **ST**.
 - **Valid** call \therefore s' temporary **ST** (ResidentStudent) is now a descendant class of addRS's parameter rs' **ST** (ResidentStudent).
- o And, there will be **no ClassCastException** at runtime!
 \therefore s' **DT** (ResidentStudent) is descendant of ResidentStudent.
- o We should have written:

```
if(s instanceof ResidentStudent) {
    sms.addRS((ResidentStudent) s);
}
```

The **instanceof** expression will evaluate to **true**, meaning it is **safe** to cast.

Polymorphism: Method Call Arguments (2.5)

In the StudentManagementSystemTester:

```
1 NonResidentStudent nrs = new NonResidentStudent();
2 /* ST: NonResidentStudent; DT: NonResidentStudent */
3 StudentManagementSystem sms = new StudentManagementSystem();
4 sms.addRS(nrs); ×
```

Will L4 with a cast compile?

```
sms.addRS ( (ResidentStudent) nrs )
```

NO ∴ (ResidentStudent) is **not** a descendant of nrs's **ST** (NonResidentStudent).

Why Inheritance: A Polymorphic Collection of Students

How do you define a class `StudentManagementSystem` that contains a list of *resident* and *non-resident* students?

```
class StudentManagementSystem {
    Student[] students;
    int numOfStudents;

    void addStudent(Student s) {
        students[numOfStudents] = s;
        numOfStudents ++;
    }

    void registerAll (Course c) {
        for(int i = 0; i < numofStudents; i ++ ) {
            students[i].register(c)
        }
    }
}
```


Polymorphism and Dynamic Binding: A Polymorphic Collection of Students (1)

```
1 ResidentStudent rs = new ResidentStudent("Rachael");
2 rs.setPremiumRate(1.5);
3 NonResidentStudent nrs = new NonResidentStudent("Nancy");
4 nrs.setDiscountRate(0.5);
5 StudentManagementSystem sms = new StudentManagementSystem();
6 sms.addStudent(rs); /* polymorphism */
7 sms.addStudent(nrs); /* polymorphism */
8 Course eeecs2030 = new Course("EECS2030", 500.0);
9 sms.registerAll(eeecs2030);
10 for(int i = 0; i < sms.numberOfStudents; i++) {
11     /* Dynamic Binding:
12     * Right version of getTuition will be called */
13     System.out.println(sms.students[i].getTuition());
14 }
```

Polymorphism and Dynamic Binding: A Polymorphic Collection of Students (2)

At runtime, attribute `sms.ss` is a **polymorphic** array:

- **Static type** of each item is as declared: **Student**
- **Dynamic type** of each item is a descendant of **Student**:
ResidentStudent, NonResidentStudent

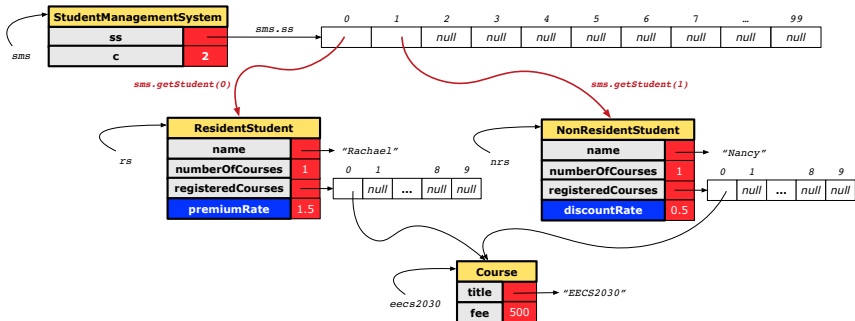

Polymorphism: Return Values (1)

```
1  class StudentManagementSystem {
2      Student[] ss; int c;
3      void addStudent(Student s) { ss[c] = s; c++; }
4      Student getStudent(int i) {
5          Student s = null;
6          if(i < 0 || i >= c) {
7              throw new IllegalArgumentException("Invalid index.");
8          }
9          else {
10             s = ss[i];
11         }
12         return s;
13     } }
```

L4: Student is **static type** of getStudent's return value.

L10: ss[i]'s ST (Student) is **descendant** of s' ST (Student).

Question: What can be the **dynamic type** of s after L10?

Answer: All descendant classes of Student.

Polymorphism: Return Values (2)

```


1 Course eecs2030 = new Course("EECS2030", 500);
2 ResidentStudent rs = new ResidentStudent("Rachael");
3 rs.setPremiumRate(1.5); rs.register(eecs2030);
4 NonResidentStudent nrs = new NonResidentStudent("Nancy");
5 nrs.setDiscountRate(0.5); nrs.register(eecs2030);
6 StudentManagementSystem sms = new StudentManagementSystem();
7 sms.addStudent(rs); sms.addStudent(nrs);
8 Student s = sms.getStudent(0); /* dynamic type of s? */
           static return type: Student
9 print(s instanceof Student && s instanceof ResidentStudent); /*true*/
10 print(s instanceof NonResidentStudent); /* false */
11 print(s.getTuition()); /*Version in ResidentStudent called:750*/
12 ResidentStudent rs2 = sms.getStudent(0); x
13 s = sms.getStudent(1); /* dynamic type of s? */
           static return type: Student
14 print(s instanceof Student && s instanceof NonResidentStudent); /*true*/
15 print(s instanceof ResidentStudent); /* false */
16 print(s.getTuition()); /*Version in NonResidentStudent called:250*/
17 NonResidentStudent nrs2 = sms.getStudent(1); x

```

Polymorphism: Return Values (3)

At runtime, attribute `sms.ss` is a **polymorphic** array:

- **Static type** of each item is as declared: **Student**
- **Dynamic type** of each item is a descendant of **Student**: **ResidentStudent**, **NonResidentStudent**

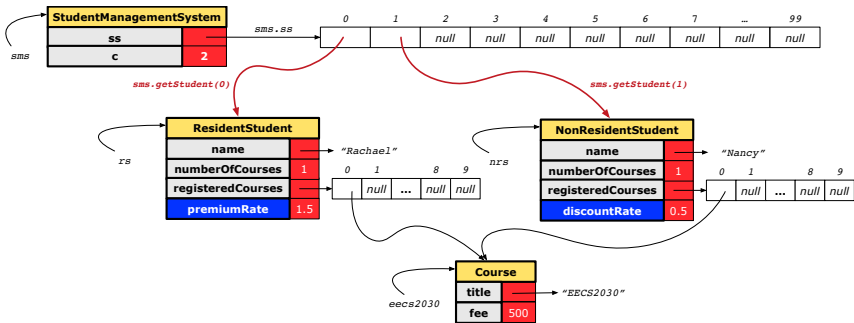

Static Type vs. Dynamic Type: When to consider which?

- *Whether or not Java code compiles* depends only on the **static types** of relevant variables.
 - ∴ Inferring the **dynamic type** statically is an **undecidable** problem that is inherently impossible to solve.
- *The behaviour of Java code being executed at runtime* (e.g., which version of method is called due to dynamic binding, whether or not a `ClassCastException` will occur, etc.) depends on the **dynamic types** of relevant variables.
 - ⇒ Best practice is to visualize how objects are created (by drawing boxes) and variables are re-assigned (by drawing arrows).

Summary: Type Checking Rules

CODE	CONDITION TO BE TYPE CORRECT
$x = y$	Is y 's ST a descendant of x 's ST ?
$x.m(y)$	Is method m defined in x 's ST ? Is y 's ST a descendant of m 's parameter's ST ?
$z = x.m(y)$	Is method m defined in x 's ST ? Is y 's ST a descendant of m 's parameter's ST ? Is ST of m 's return value a descendant of z 's ST ?
$(C) y$	Is C an ancestor or a descendant of y 's ST ?
$x = (C) y$	Is C an ancestor or a descendant of y 's ST ? Is C a descendant of x 's ST ?
$x.m((C) y)$	Is C an ancestor or a descendant of y 's ST ? Is method m defined in x 's ST ? Is C a descendant of m 's parameter's ST ?

Even if $(C) y$ compiles OK, there will be a runtime `ClassCastException` if C is not an **ancestor** of y 's **DT**!

Root of the Java Class Hierarchy

- Implicitly:
 - Every class is a *child/sub* class of the `Object` class.
 - The `Object` class is the *parent/super* class of every class.
- There are two useful *accessor methods* that every class *inherits* from the `Object` class:
 - `boolean equals(Object other)`
Indicates whether some other object is “equal to” this one.
 - The default definition inherited from `Object`:


```
boolean equals(Object other) {  
    return (this == other); }
```
 - `String toString()`
Returns a string representation of the object.
- Very often when you define new classes, you want to *redefine / override* the inherited definitions of `equals` and `toString`.

Overriding and Dynamic Binding (1)

Object is the common parent/super class of every class.

- Every class inherits the **default version** of `equals`
- Say a reference variable `v` has **dynamic type** `D`:
 - **Case 1** `D overrides` `equals`
⇒ `v.equals(...)` invokes the **overridden version** in `D`
 - **Case 2** `D` does **not override** `equals`
 - Case 2.1** At least one ancestor classes of `D` **override** `equals`
⇒ `v.equals(...)` invokes the **overridden version** in the **closest ancestor class**
 - Case 2.2** No ancestor classes of `D` **override** `equals`
⇒ `v.equals(...)` invokes **default version** inherited from `Object`.
- Same principle applies to the `toString` method, and all overridden methods in general.

Overriding and Dynamic Binding (2.1)

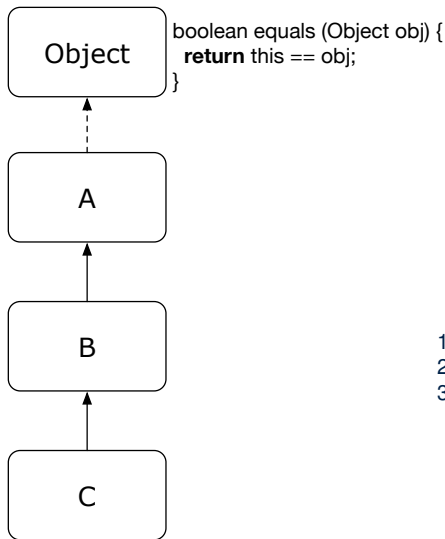


```
class A {  
    /*equals not overridden*/  
}  
class B extends A {  
    /*equals not overridden*/  
}  
class C extends B {  
    /*equals not overridden*/  
}
```

```
1 Object c1 = new C();  
2 Object c2 = new C();  
3 println(c1.equals(c2));
```

L3 calls which version of
equals? [Object]

Overriding and Dynamic Binding (2.2)

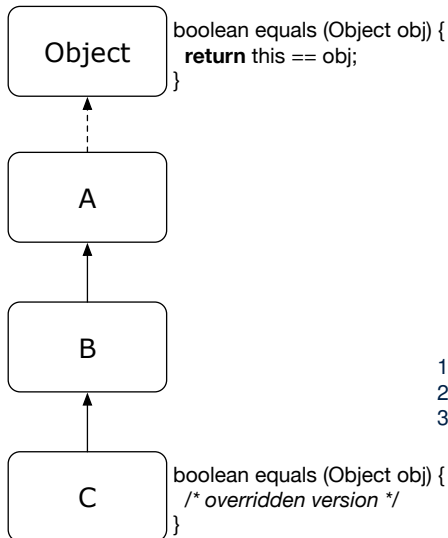


```
class A {  
    /*equals not overridden*/  
}  
class B extends A {  
    /*equals not overridden*/  
}  
class C extends B {  
    boolean equals(Object obj) {  
        /* overridden version */  
    }  
}
```

```
1 Object c1 = new C();  
2 Object c2 = new C();  
3 println(c1.equals(c2));
```

L3 calls which version of equals? [C]

Overriding and Dynamic Binding (2.3)

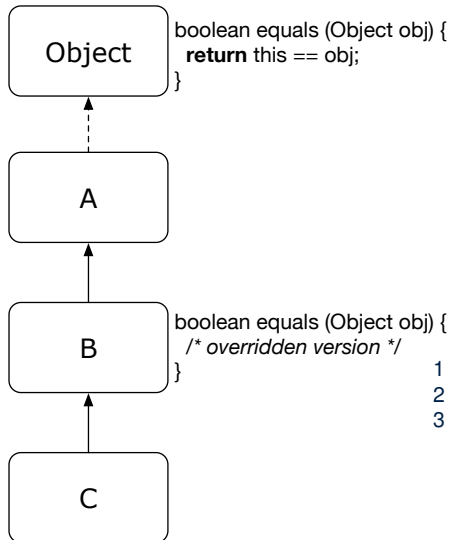

```
class A {  
    /*equals not overridden*/  
}  
class B extends A {  
    boolean equals(Object obj) {  
        /* overridden version */  
    }  
}  
class C extends B {  
    /*equals not overridden*/  
}
```

```
1 Object c1 = new C();  
2 Object c2 = new C();  
3 println(c1.equals(c2));
```

L3 calls which version of equals? [B]

Behaviour of Inherited toString Method (1)

```
Point p1 = new Point(2, 4);  
System.out.println(p1);
```

```
Point@677327b6
```

- Implicitly, the toString method is called inside the println method.
- By default, the address stored in p1 gets printed.
- We need to **redefine** / **override** the toString method, inherited from the Object class, in the Point class.

Behaviour of Inherited toString Method (2)

```
class Point {  
    double x;  
    double y;  
    public String toString() {  
        return "(" + this.x + ", " + this.y + ")";  
    }  
}
```

After redefining/overriding the toString method:

```
Point p1 = new Point(2, 4);  
System.out.println(p1);
```

(2, 4)

Behaviour of Inherited `toString` Method (3)



Exercise: Override the `equals` and `toString` methods for the `ResidentStudent` and `NonResidentStudent` classes.

Index (1)

Why Inheritance: A Motivating Example

No Inheritance: ResidentStudent Class

No Inheritance: NonResidentClass

No Inheritance: Testing Student Classes

No Inheritance:

Issues with the Student Classes

No Inheritance: Maintainability of Code (1)

No Inheritance: Maintainability of Code (2)

No Inheritance:

A Collection of Various Kinds of Students

Inheritance Architecture

Inheritance: The Student Parent/Super Class

Inheritance:

The ResidentStudent Child/Sub Class

Index (2)

Inheritance:

The NonResidentStudent Child/Sub Class

Inheritance Architecture Revisited

Using Inheritance for Code Reuse

Visualizing Parent/Child Objects (1)

Visualizing Parent/Child Objects (2)

Testing the Two Student Sub-Classes

Inheritance Architecture: Static Types & Expectations

Polymorphism: Intuition (1)

Polymorphism: Intuition (2)

Polymorphism: Intuition (3)

Dynamic Binding: Intuition (1)

Dynamic Binding: Intuition (2)

Multi-Level Inheritance Architecture

Index (3)

Multi-Level Inheritance Hierarchy:

Smart Phones

Inheritance Forms a Type Hierarchy

Inheritance Accumulates Code for Reuse

Reference Variable: Static Type

Substitutions via Assignments

Rules of Substitution

Reference Variable: Dynamic Type

Visualizing Static Type vs. Dynamic Type

Reference Variable:

Changing Dynamic Type (1)

Reference Variable:

Changing Dynamic Type (2)

Polymorphism and Dynamic Binding (1)

Polymorphism and Dynamic Binding (2.1)

Index (4)

Polymorphism and Dynamic Binding (2.2)

Polymorphism and Dynamic Binding (3.1)

Polymorphism and Dynamic Binding (3.2)

Polymorphism and Dynamic Binding (3.3)

Reference Type Casting: Motivation (1.1)

Reference Type Casting: Motivation (1.2)

Reference Type Casting: Motivation (2.1)

Reference Type Casting: Motivation (2.2)

Type Cast: Named or Anonymous

Notes on Type Cast (1)

Reference Type Casting: Danger (1)

Reference Type Casting: Danger (2)

Notes on Type Cast (2.1)

Notes on Type Cast (2.2)

Index (5)

Notes on Type Cast (2.3)

Required Reading:

Static Types, Dynamic Types, Casts

Compilable Cast vs. Exception-Free Cast

Reference Type Casting: Runtime Check (1)

Reference Type Casting: Runtime Check (2)

Notes on the `instanceof` Operator (1)

Notes on the `instanceof` Operator (2)

Static Type and Polymorphism (1.1)

Static Type and Polymorphism (1.2)

Static Type and Polymorphism (1.3)

Static Type and Polymorphism (1.4)

Static Type and Polymorphism (2)

Polymorphism: Method Call Arguments (1)

Index (6)

Polymorphism: Method Call Arguments (2.1)

Polymorphism: Method Call Arguments (2.2)

Polymorphism: Method Call Arguments (2.3)

Polymorphism: Method Call Arguments (2.4)

Polymorphism: Method Call Arguments (2.5)

Why Inheritance:

A Polymorphic Collection of Students

Polymorphism and Dynamic Binding:

A Polymorphic Collection of Students (1)

Polymorphism and Dynamic Binding:

A Polymorphic Collection of Students (2)

Polymorphism: Return Values (1)

Polymorphism: Return Values (2)

Polymorphism: Return Values (3)

Index (7)

**Static Type vs. Dynamic Type:
When to consider which?**

Summary: Type Checking Rules

Root of the Java Class Hierarchy

Overriding and Dynamic Binding (1)

Overriding and Dynamic Binding (2.1)

Overriding and Dynamic Binding (2.2)

Overriding and Dynamic Binding (2.3)

Behaviour of Inherited `toString` Method (1)

Behaviour of Inherited `toString` Method (2)

Behaviour of Inherited `toString` Method (3)