

Recursion



EECS2030 B & E: Advanced
Object Oriented Programming
Fall 2021

CHEN-WEI WANG

Learning Outcomes



This module is designed to help you learn about:

1. How to solve problems **recursively**
2. Example **recursions** on string and arrays
3. Some more advanced example (if time permitted)

Beyond this lecture ...



- Fantastic resources for sharpening your recursive skills for the exam:

<http://codingbat.com/java/Recursion-1>

<http://codingbat.com/java/Recursion-2>

- The **best** approach to learning about recursion is via a functional programming language:

Haskell Tutorial: <https://www.haskell.org/tutorial/>

Recursion: Principle



- **Recursion** is useful in expressing solutions to problems that can be **recursively** defined:
 - **Base Cases:** Small problem instances immediately solvable.
 - **Recursive Cases:**
 - Large problem instances *not immediately solvable*.
 - Solve by reusing *solution(s) to strictly smaller problem instances*.
- Similar idea learnt in high school: [**mathematical induction**]
- Recursion can be easily expressed programmatically in Java:

```
m(i) {  
    if(i == ...) { /* base case: do something directly */ }  
    else {  
        m(j); /* recursive call with strictly smaller value */  
    }  
}
```

- In the body of a method m , there might be *a call or calls to m itself*.
- Each such self-call is said to be a **recursive call**.
- Inside the execution of $m(i)$, a recursive call $m(j)$ must be that $j < i$.

Tracing Method Calls via a Stack



- When a method is called, it is **activated** (and becomes **active**) and **pushed** onto the stack.
- When the body of a method makes a (helper) method call, that (helper) method is **activated** (and becomes **active**) and **pushed** onto the stack.
 - ⇒ The stack contains activation records of all **active** methods.
 - **Top** of stack denotes the **current point of execution**.
 - Remaining parts of stack are (temporarily) **suspended**.
- When entire body of a method is executed, stack is **popped**.
 - ⇒ The **current point of execution** is returned to the new **top** of stack (which was **suspended** and just became **active**).
- Execution terminates when the stack becomes **empty**.

5 of 28

Common Errors of Recursive Methods



- Missing Base Case(s).

```
int factorial(int n) {  
    return n * factorial(n - 1);  
}
```

Base case(s) are meant as points of stopping growing the runtime stack.

- Recursive Calls on Non-Smaller Problem Instances.

```
int factorial(int n) {  
    if(n == 0) { /* base case */ return 1; }  
    else { /* recursive case */ return n * factorial(n); }  
}
```

Recursive calls on **strictly smaller** problem instances are meant for moving gradually towards the base case(s).

- In both cases, a `StackOverflowException` will be thrown.

7 of 28

Recursion: Factorial (1)



- Recall the formal definition of calculating the n factorial:

$$n! = \begin{cases} 1 & \text{if } n = 0 \\ n \cdot (n-1) \cdot (n-2) \cdot \dots \cdot 3 \cdot 2 \cdot 1 & \text{if } n \geq 1 \end{cases}$$

- How do you define the same problem **recursively**?


$$n! = \begin{cases} 1 & \text{if } n = 0 \\ n \cdot (n-1)! & \text{if } n \geq 1 \end{cases}$$

- To solve $n!$, we combine n and the solution to $(n-1)!$.

```
int factorial(int n) {  
    int result;  
    if(n == 0) { /* base case */ result = 1; }  
    else { /* recursive case */  
        result = n * factorial(n - 1);  
    }  
    return result;  
}
```

6 of 28

Recursion: Factorial (2)

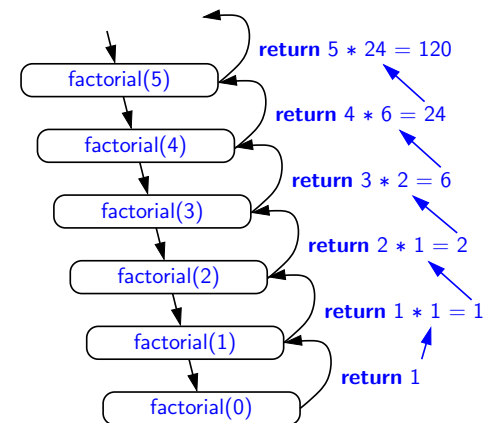

8 of 28

Recursion: Factorial (3)

- When running *factorial(5)*, a *recursive call factorial(4)* is made. Call to *factorial(5)* suspended until *factorial(4)* returns a value.
- When running *factorial(4)*, a *recursive call factorial(3)* is made. Call to *factorial(4)* suspended until *factorial(3)* returns a value.
- ...
- factorial(0)* returns 1 back to *suspended call factorial(1)*.
- factorial(1)* receives 1 from *factorial(0)*, multiplies 1 to it, and returns 1 back to the *suspended call factorial(2)*.
- factorial(2)* receives 1 from *factorial(1)*, multiplies 2 to it, and returns 2 back to the *suspended call factorial(3)*.
- factorial(3)* receives 2 from *factorial(1)*, multiplies 3 to it, and returns 6 back to the *suspended call factorial(4)*.
- factorial(4)* receives 6 from *factorial(3)*, multiplies 4 to it, and returns 24 back to the *suspended call factorial(5)*.
- factorial(5)* receives 24 from *factorial(4)*, multiplies 5 to it, and returns 120 as the result.

9 of 28

Recursion: Factorial (4)

- When the execution of a method (e.g., *factorial(5)*) leads to a nested method call (e.g., *factorial(4)*):
 - The execution of the current method (i.e., *factorial(5)*) is *suspended*, and a structure known as an *activation record* or *activation frame* is created to store information about the progress of that method (e.g., values of parameters and local variables).
 - The nested methods (e.g., *factorial(4)*) may call other nested methods (*factorial(3)*).
 - When all nested methods complete, the activation frame of the *latest suspended* method is re-activated, then continue its execution.
- What kind of data structure does this activation-suspension process correspond to? [LIFO Stack]

10 of 28

Recursion: Fibonacci Sequence (1)

- Can you identify the pattern of a Fibonacci sequence?

$$F = 1, 1, 2, 3, 5, 8, 13, 21, 34, 55, 89, \dots$$

- Here is the formal, *recursive* definition of calculating the n_{th} number in a Fibonacci sequence (denoted as F_n):

$$F_n = \begin{cases} 1 & \text{if } n = 1 \\ 1 & \text{if } n = 2 \\ F_{n-1} + F_{n-2} & \text{if } n > 2 \end{cases}$$

```
int fib(int n) {
    int result;
    if(n == 1) { /* base case */ result = 1; }
    else if(n == 2) { /* base case */ result = 1; }
    else { /* recursive case */
        result = fib(n - 1) + fib(n - 2);
    }
    return result;
}
```

11 of 28

Recursion: Fibonacci Sequence (2)

```
fib(5)
= {fib(5) = fib(4) + fib(3); push(fib(5)); suspended: {fib(5)}; active: fib(4)}
fib(4) + fib(3)
= {fib(4) = fib(3) + fib(2); suspended: {fib(4), fib(5)}; active: fib(3)}
(fib(3) + fib(2)) + fib(3)
= {fib(3) = fib(2) + fib(1); suspended: {fib(3), fib(4), fib(5)}; active: fib(2)}
((fib(2) + fib(1)) + fib(2)) + fib(3)
= {fib(2) returns 1; suspended: {fib(3), fib(4), fib(5)}; active: fib(1)}
((1 + fib(1)) + fib(2)) + fib(3)
= {fib(1) returns 1; suspended: {fib(3), fib(4), fib(5)}; active: fib(3)}
((1 + 1) + fib(2)) + fib(3)
= {fib(3) returns 1 + 1; pop(); suspended: {fib(4), fib(5)}; active: fib(2)}
(2 + fib(2)) + fib(3)
= {fib(2) returns 1; suspended: {fib(4), fib(5)}; active: fib(4)}
(2 + 1) + fib(3)
= {fib(4) returns 2 + 1; pop(); suspended: {fib(5)}; active: fib(3)}
3 + fib(3)
= {fib(3) = fib(2) + fib(1); suspended: {fib(3), fib(5)}; active: fib(2)}
3 + (fib(2) + fib(1))
= {fib(2) returns 1; suspended: {fib(3), fib(5)}; active: fib(1)}
3 + (1 + fib(1))
= {fib(1) returns 1; suspended: {fib(3), fib(5)}; active: fib(3)}
3 + (1 + 1)
= {fib(3) returns 1 + 1; pop(); suspended: {fib(5)}; active: fib(5)}
3 + 2
fib(5) returns 3 + 2; suspended: {}
```

12 of 28

Java Library: String



```
public class StringTester {
    public static void main(String[] args) {
        String s = "abcd";
        System.out.println(s.isEmpty()); /* false */
        /* Characters in index range [0, 0) */
        String t0 = s.substring(0, 0);
        System.out.println(t0); /* "" */
        /* Characters in index range [0, 4) */
        String t1 = s.substring(0, 4);
        System.out.println(t1); /* "abcd" */
        /* Characters in index range [1, 3) */
        String t2 = s.substring(1, 3);
        System.out.println(t2); /* "bc" */
        String t3 = s.substring(0, 2) + s.substring(2, 4);
        System.out.println(s.equals(t3)); /* true */
        for(int i = 0; i < s.length(); i++) {
            System.out.print(s.charAt(i));
        }
        System.out.println();
    }
}
```

13 of 28

Recursion: Palindrome (1)



Problem: A palindrome is a word that reads the same forwards and backwards. Write a method that takes a string and determines whether or not it is a palindrome.

```
System.out.println(isPalindrome("")); true
System.out.println(isPalindrome("a")); true
System.out.println(isPalindrome("madam")); true
System.out.println(isPalindrome("racecar")); true
System.out.println(isPalindrome("man")); false
```

Base Case 1: Empty string → Return *true* immediately.

Base Case 2: String of length 1 → Return *true* immediately.

Recursive Case: String of length ≥ 2 →

- 1st and last characters match, **and**
- *the rest (i.e., middle) of the string is a palindrome*.

14 of 28

Recursion: Palindrome (2)



```
boolean isPalindrome(String word) {
    if(word.length() == 0 || word.length() == 1) {
        /* base case */
        return true;
    }
    else {
        /* recursive case */
        char firstChar = word.charAt(0);
        char lastChar = word.charAt(word.length() - 1);
        String middle = word.substring(1, word.length() - 1);
        return
            firstChar == lastChar
            /* See the API of java.lang.String.substring. */
            && isPalindrome(middle);
    }
}
```

15 of 28

Recursion: Reverse of String (1)



Problem: The reverse of a string is written backwards. Write a method that takes a string and returns its reverse.

```
System.out.println(reverseOf("")); /* "" */
System.out.println(reverseOf("a")); "a"
System.out.println(reverseOf("ab")); "ba"
System.out.println(reverseOf("abc")); "cba"
System.out.println(reverseOf("abcd")); "dcba"
```

Base Case 1: Empty string → Return *empty string*.

Base Case 2: String of length 1 → Return *that string*.

Recursive Case: String of length ≥ 2 →

- 1) Head of string (i.e., first character)
- 2) Reverse of the tail of string (i.e., all but the first character)

Return the concatenation of 2) and 1).

16 of 28

Recursion: Reverse of a String (2)



```
String reverseOf (String s) {
    if(s.isEmpty()) { /* base case 1 */
        return "";
    }
    else if(s.length() == 1) { /* base case 2 */
        return s;
    }
    else { /* recursive case */
        String tail = s.substring(1, s.length());
        String reverseOfTail = reverseOf (tail);
        char head = s.charAt(0);
        return reverseOfTail + head;
    }
}
```

17 of 28

Recursion: Number of Occurrences (2)



```
int occurrencesOf (String s, char c) {
    if(s.isEmpty()) {
        /* Base Case */
        return 0;
    }
    else {
        /* Recursive Case */
        char head = s.charAt(0);
        String tail = s.substring(1, s.length());
        if(head == c) {
            return 1 + occurrencesOf (tail, c);
        }
        else {
            return 0 + occurrencesOf (tail, c);
        }
    }
}
```

19 of 28

Recursion: Number of Occurrences (1)



Problem: Write a method that takes a string s and a character c , then count the number of occurrences of c in s .

```
System.out.println(occurrencesOf("", 'a')); /* 0 */
System.out.println(occurrencesOf("a", 'a')); /* 1 */
System.out.println(occurrencesOf("b", 'a')); /* 0 */
System.out.println(occurrencesOf("baaba", 'a')); /* 3 */
System.out.println(occurrencesOf("baaba", 'b')); /* 2 */
System.out.println(occurrencesOf("baaba", 'c')); /* 0 */
```

Base Case: Empty string \rightarrow Return 0.

Recursive Case: String of length $\geq 1 \rightarrow$

- 1) Head of s (i.e., first character)
- 2) Number of occurrences of c in the tail of s (i.e., all but the first character)

If head is equal to c , return $1 + 2$.

If head is not equal to c , return $0 + 2$.

18 of 28

Making Recursive Calls on an Array



- Recursive calls denote solutions to *smaller* sub-problems.
- *Naively*, explicitly create a new, smaller array:

```
void m(int[] a) {
    if(a.length == 0) { /* base case */ }
    else if(a.length == 1) { /* base case */ }
    else {
        int[] sub = new int[a.length - 1];
        for(int i = 1; i < a.length; i++) { sub[i - 1] = a[i]; }
        m(sub) } }
}
```

- For *efficiency*, we pass the *reference* of the same array and specify the *range of indices* to be considered:

```
void m(int[] a, int from, int to) {
    if(from > to) { /* base case */ }
    else if(from == to) { /* base case */ }
    else { m(a, from + 1, to) } }
}
```

- $m(a, 0, a.length - 1)$ [Initial call; entire array]
- $m(a, 1, a.length - 1)$ [1st r.c. on array of size $a.length - 1$]
- $m(a, a.length - 1, a.length - 1)$ [Last r.c. on array of size 1]

20 of 28

Recursion: All Positive (1)



Problem: Determine if an array of integers are all positive.

```
System.out.println(allPositive({})); /* true */
System.out.println(allPositive({1, 2, 3, 4, 5})); /* true */
System.out.println(allPositive({1, 2, -3, 4, 5})); /* false */
```

Base Case: Empty array → Return *true* immediately.

The base case is *true* ∴ we can *not* find a counter-example (i.e., a number *not* positive) from an empty array.

Recursive Case: Non-Empty array →

- 1st element positive, **and**
- **the rest of the array is all positive.**

Exercise: Write a method `boolean somePositive(int[] a)`

a) which *recursively* returns *true* if there is some positive number in *a*, and *false* if there are no positive numbers in *a*.

Hint: What to return in the base case of an empty array? [*false*]

∴ No witness (i.e., a positive number) from an empty array

21 of 28

Recursion: Is an Array Sorted? (1)



Problem: Determine if an array of integers are sorted in a non-descending order.

```
System.out.println(isSorted({})); true
System.out.println(isSorted({1, 2, 2, 3, 4})); true
System.out.println(isSorted({1, 2, 2, 1, 3})); false
```

Base Case: Empty array → Return *true* immediately.

The base case is *true* ∴ we can *not* find a counter-example (i.e., a pair of adjacent numbers that are *not* sorted in a non-descending order) from an empty array.

Recursive Case: Non-Empty array →

- 1st and 2nd elements are sorted in a non-descending order, **and**
- **the rest of the array, starting from the 2nd element, are sorted in a non-descending order.**

23 of 28

Recursion: All Positive (2)



```
boolean allPositive(int[] a) {
    return allPositiveHelper(a, 0, a.length - 1);
}

boolean allPositiveHelper(int[] a, int from, int to) {
    if (from > to) { /* base case 1: empty range */
        return true;
    }
    else if (from == to) { /* base case 2: range of one element */
        return a[from] > 0;
    }
    else { /* recursive case */
        return a[from] > 0 && allPositiveHelper(a, from + 1, to);
    }
}
```

22 of 28

Recursion: Is an Array Sorted? (2)



```
boolean isSorted(int[] a) {
    return isSortedHelper(a, 0, a.length - 1);
}

boolean isSortedHelper(int[] a, int from, int to) {
    if (from > to) { /* base case 1: empty range */
        return true;
    }
    else if (from == to) { /* base case 2: range of one element */
        return true;
    }
    else {
        return a[from] <= a[from + 1]
            && isSortedHelper(a, from + 1, to);
    }
}
```

24 of 28



Beyond this lecture ...

- Recursions on Arrays: Lab Exercise from EECS2030-F19
- Notes on Recursion:
http://www.eecs.yorku.ca/~jackie/teaching/lectures/2021/F/EECS2030/slides/EECS2030_F21_Notes_Recursion.pdf
- API for String:
<https://docs.oracle.com/javase/8/docs/api/java/lang/String.html>
- Fantastic resources for sharpening your recursive skills for the exam:
<http://codingbat.com/java/Recursion-1>
<http://codingbat.com/java/Recursion-2>
- The **best** approach to learning about recursion is via a functional programming language:
Haskell Tutorial: <https://www.haskell.org/tutorial/>

25 of 28



Index (2)

Java Library: String

Recursion: Palindrome (1)

Recursion: Palindrome (2)

Recursion: Reverse of a String (1)

Recursion: Reverse of a String (2)

Recursion: Number of Occurrences (1)

Recursion: Number of Occurrences (2)

Making Recursive Calls on an Array

Recursion: All Positive (1)

Recursion: All Positive (2)

Recursion: Is an Array Sorted? (1)

27 of 28



Index (1)

Learning Outcomes

Beyond this lecture ...

Recursion: Principle

Tracing Method Calls via a Stack

Recursion: Factorial (1)

Common Errors of Recursive Methods

Recursion: Factorial (2)

Recursion: Factorial (3)

Recursion: Factorial (4)

Recursion: Fibonacci Sequence (1)

Recursion: Fibonacci Sequence (2)

26 of 28



Index (3)

Recursion: Is an Array Sorted? (2)

Beyond this lecture ...

28 of 28