

Subcontracting

Readings: OOSCS2 Chapters 14 – 16



EECS3311 A & E: Software Design
Fall 2020

CHEN-WEI WANG



Learning Objectives

1. **Preconditions**: require less vs. require more
2. **Postconditions**: ensure less vs. ensure more
3. Inheritance and Contracts: **Static Analysis**
4. Inheritance and Contracts: **Runtime Checks**

3 of 18

Aspects of Inheritance



- **Code Reuse**
- Substitutability
 - **Polymorphism** and **Dynamic Binding**
[compile-time type checks]
 - **Sub-contracting**
[runtime behaviour checks]

2 of 18

Background of Logic (1)



Given **preconditions** P_1 and P_2 , we say that

P_2 **requires less** than P_1 if

P_2 is **less strict** on (thus **allowing more**) inputs than P_1 does.

$$\{ x \mid P_1(x) \} \supseteq \{ x \mid P_2(x) \}$$

More concisely:

$$P_1 \Rightarrow P_2$$

e.g., For command `withdraw(amount: amount)`,

$P_2 : amount \geq 0$ **requires less** than $P_1 : amount > 0$

What is the **precondition** that **requires the least**? [**true**]

4 of 18

Background of Logic (2)

Given **postconditions** or **invariants** Q_1 and Q_2 , we say that

Q_2 **ensures more** than Q_1 if

Q_2 is **stricter** on (thus **allowing less**) outputs than Q_1 does.

$$\{x \mid Q_2(x)\} \subseteq \{x \mid Q_1(x)\}$$

More concisely:

$$Q_2 \Rightarrow Q_1$$

e.g., For query $q(i: \text{INTEGER}) : \text{BOOLEAN}$,


$Q_2 : \text{Result} = (i > 0) \wedge (i \bmod 2 = 0)$ **ensures more** than

$Q_1 : \text{Result} = (i > 0) \vee (i \bmod 2 = 0)$

What is the **postcondition** that **ensures the most?** [**false**]

5 of 18

Inheritance and Contracts (2.1)

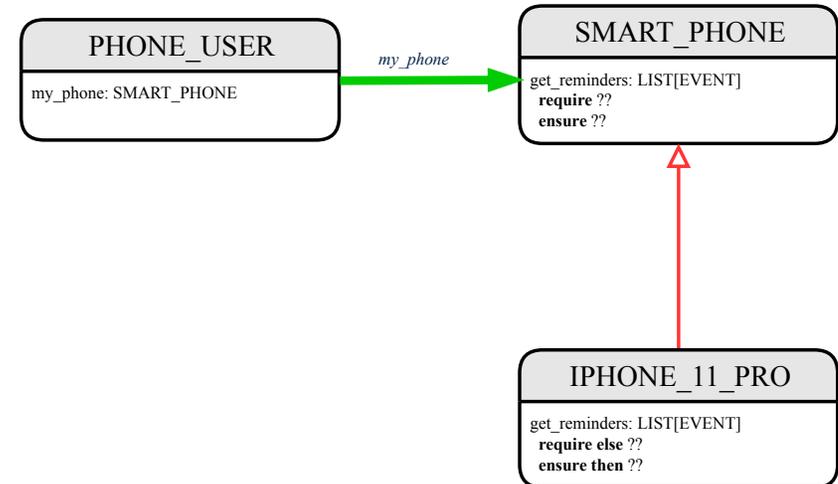

7 of 18

Inheritance and Contracts (1)

- The fact that we allow **polymorphism**:

```

local my_phone: SMART_PHONE
      i_phone: IPHONE_11_PRO
      samsung_phone: GALAXY_S10_PLUS
      huawei_phone: HUAWAI_P30_PRO
do my_phone := i_phone
  my_phone := samsung_phone
  my_phone := huawei_phone

```

suggests that these instances may **substitute** for each other.

- Intuitively, when expecting `SMART_PHONE`, we can substitute it by instances of any of its **descendant** classes.
 - \therefore Descendants **accumulate code** from its ancestors and can thus **meet expectations** on their ancestors.
- Such **substitutability** can be reflected on contracts, where a **substitutable instance** will:
 - Not** require more from clients for using the services.
 - Not** ensure less to clients for using the services.

6 of 18

Inheritance and Contracts (2.2)

```

class SMART_PHONE
  get_reminders: LIST[EVENT]
  require
    α: battery_level ≥ 0.1 -- 10%
  ensure
    β: ∀e:Result | e happens today
end

class IPHONE_11_PRO
  inherit SMART_PHONE redefine get_reminders end
  get_reminders: LIST[EVENT]
  require else
    γ: battery_level ≥ 0.15 -- 15%
  ensure then
    δ: ∀e:Result | e happens today or tomorrow
end

```

Contracts in descendant class `IPHONE_11_PRO` are **not suitable**.
 ($\text{battery_level} \geq 0.1 \Rightarrow \text{battery_level} \geq 0.15$) is not a tautology.
 e.g., A client able to get reminders on a `SMART_PHONE`, when battery level is 12%, will fail to do so on an `IPHONE_11_PRO`.

8 of 18

Inheritance and Contracts (2.3)



```
class SMART_PHONE
  get_reminders: LIST[EVENT]
  require
     $\alpha$ : battery_level  $\geq$  0.1 -- 10%
  ensure
     $\beta$ :  $\forall e$ :Result | e happens today
end
```

```
class IPHONE_11_PRO
inherit SMART_PHONE redefine get_reminders end
get_reminders: LIST[EVENT]
require else
   $\gamma$ : battery_level  $\geq$  0.15 -- 15%
ensure then
   $\delta$ :  $\forall e$ :Result | e happens today or tomorrow
end
```

Contracts in descendant class `IPHONE_11_PRO` are *not suitable*.
(e happens ty. or tw.) \Rightarrow (e happens ty.) not tautology.
e.g., A client receiving today's reminders from `SMART_PHONE` are shocked by tomorrow-only reminders from `IPHONE_11_PRO`.

9 of 18

Inheritance and Contracts (2.5)



```
class SMART_PHONE
  get_reminders: LIST[EVENT]
  require
     $\alpha$ : battery_level  $\geq$  0.1 -- 10%
  ensure
     $\beta$ :  $\forall e$ :Result | e happens today
end
```

```
class IPHONE_11_PRO
inherit SMART_PHONE redefine get_reminders end
get_reminders: LIST[EVENT]
require else
   $\gamma$ : battery_level  $\geq$  0.05 -- 5%
ensure then
   $\delta$ :  $\forall e$ :Result | e happens today between 9am and 5pm
end
```

Contracts in descendant class `IPHONE_11_PRO` are *suitable*.
• *Ensure the same or more* $\delta \Rightarrow \beta$
Clients benefiting from `SMART_PHONE` are *not* shocked by failing to gain at least those benefits from same feature in `IPHONE_11_PRO`.

11 of 18

Inheritance and Contracts (2.4)



```
class SMART_PHONE
  get_reminders: LIST[EVENT]
  require
     $\alpha$ : battery_level  $\geq$  0.1 -- 10%
  ensure
     $\beta$ :  $\forall e$ :Result | e happens today
end
```

```
class IPHONE_11_PRO
inherit SMART_PHONE redefine get_reminders end
get_reminders: LIST[EVENT]
require else
   $\gamma$ : battery_level  $\geq$  0.05 -- 5%
ensure then
   $\delta$ :  $\forall e$ :Result | e happens today between 9am and 5pm
end
```

Contracts in descendant class `IPHONE_11_PRO` are *suitable*.
• *Require the same or less* $\alpha \Rightarrow \gamma$
Clients satisfying the precondition for `SMART_PHONE` are *not* shocked by not being to use the same feature for `IPHONE_11_PRO`.

10 of 18

Contract Redeclaration Rule (1)



- In the context of some feature in a descendant class:
 - Use `require else` to redeclare its precondition.
 - Use `ensure then` to redeclare its postcondition.
- The resulting *runtime assertions checks* are:
 - `original_pre or else new_pre`
 \Rightarrow Clients *able to satisfy original_pre* will not be shocked.
 $\therefore \text{true} \vee \text{new_pre} \equiv \text{true}$
A *precondition violation* will *not* occur as long as clients are able to satisfy what is required from the ancestor classes.
 - `original_post and then new_post`
 \Rightarrow *Failing to gain original_post* will be reported as an issue.
 $\therefore \text{false} \wedge \text{new_post} \equiv \text{false}$
A *postcondition violation* occurs (as expected) if clients do not receive at least those benefits promised from the ancestor classes.

12 of 18

Contract Redeclaration Rule (2.1)



```
class FOO
  f
  do ...
  end
end
```

```
class BAR
  inherit FOO redefine f end
  f require else new_pre
  do ...
  end
end
```

- Unspecified *original_pre* is as if declaring `require true`
 $\therefore \text{true} \vee \text{new_pre} \equiv \text{true}$

```
class FOO
  f
  do ...
  end
end
```

```
class BAR
  inherit FOO redefine f end
  f
  do ...
  ensure then new_post
  end
end
```

- Unspecified *original_post* is as if declaring `ensure true`
 $\therefore \text{true} \wedge \text{new_post} \equiv \text{new_post}$

13 of 18

Invariant Accumulation



- Every class inherits **invariants** from all its ancestor classes.
- Since invariants are like postconditions of all features, they are “**conjoined**” to be checked at runtime.

```
class POLYGON
  vertices: ARRAY[POINT]
  invariant
  vertices.count ≥ 3
end
```

```
class RECTANGLE
  inherit POLYGON
  invariant
  vertices.count = 4
end
```

- What is checked on a RECTANGLE instance at runtime:
 $(\text{vertices.count} \geq 3) \wedge (\text{vertices.count} = 4) \equiv (\text{vertices.count} = 4)$
- Can PENTAGON be a descendant class of RECTANGLE?
 $(\text{vertices.count} = 5) \wedge (\text{vertices.count} = 4) \equiv \text{false}$

15 of 18

Contract Redeclaration Rule (2.2)



```
class FOO
  f require
  original_pre
  do ...
  end
end
```

```
class BAR
  inherit FOO redefine f end
  f
  do ...
  end
end
```

- Unspecified *new_pre* is as if declaring `require else false`
 $\therefore \text{original_pre} \vee \text{false} \equiv \text{original_pre}$

```
class FOO
  f
  do ...
  ensure
  original_post
  end
end
```

```
class BAR
  inherit FOO redefine f end
  f
  do ...
  end
end
```

- Unspecified *new_post* is as if declaring `ensure then true`
 $\therefore \text{original_post} \wedge \text{true} \equiv \text{original_post}$

14 of 18

Inheritance and Contracts (3)



```
class FOO
  f
  require
  original_pre
  ensure
  original_post
  end
end
```

```
class BAR
  inherit FOO redefine f end
  f
  require else
  new_pre
  ensure then
  new_post
  end
end
```

(Static) **Design Time** :

- $\text{original_pre} \Rightarrow \text{new_pre}$ should be proved as a tautology
- $\text{new_post} \Rightarrow \text{original_post}$ should be proved as a tautology

(Dynamic) **Runtime** :

- $\text{original_pre} \vee \text{new_pre}$ is checked
- $\text{original_post} \wedge \text{new_post}$ is checked

16 of 18

Index (1)



Aspects of Inheritance

Learning Objectives

Background of Logic (1)

Background of Logic (2)

Inheritance and Contracts (1)

Inheritance and Contracts (2.1)

Inheritance and Contracts (2.2)

Inheritance and Contracts (2.3)

Inheritance and Contracts (2.4)

Inheritance and Contracts (2.5)

Contract Redeclaration Rule (1)

17 of 18

Index (2)



Contract Redeclaration Rule (2.1)

Contract Redeclaration Rule (2.2)

Invariant Accumulation

Inheritance and Contracts (3)

18 of 18